




 Price List

# Final Distribution, Wiring Devices and Lighting Control Products

With effect from January 15<sup>th</sup>, 2026

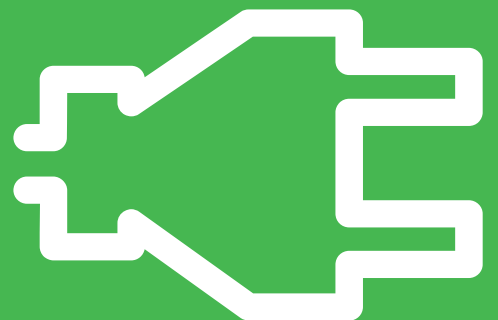



<b>Acti 9 Distribution System .....</b>	<b>4</b>
Miniature Circuit Breakers (MCBs).....	8
Residual Current Devices (RCDs).....	11
Arc fault Detection Device (AFDD).....	14
Auxiliaries and Accessories for MCBs / RCDs .....	15
Surge Protection Devices .....	17
Control and Command Products.....	19
ComReady Control and Command Products.....	21
Isobar Distribution System .....	22
Acti 9 Isobar Pan Assembly .....	24
Acti 9 Distribution Boards.....	25
Acti 9 Modular Distribution Boards - Metallic.....	29
<b>Timers &amp; Time Switches .....</b>	<b>36</b>
<b>Kaedra Enclosures .....</b>	<b>38</b>
Weather Proof .....	38
<b>PratiKa.....</b>	<b>40</b>
Plugs and Sockets - IP44 / IP67 .....	40
Electra .....	44
Metal Clad Plugs & Sockets .....	44
<b>56 Series .....</b>	<b>45</b>
Plugs and Sockets - IP56 / IP66 .....	45
<b>Wiring Devices .....</b>	<b>48</b>
LIVIA - Switch to the extra-ordinary.....	49
Miluz Lara .....	51
Opale - Switches with Satin Finish .....	55
Unica Pure - Irresistibly Beautiful .....	57
ZENcelo India - The Revolutionary Full-Flat Switch .....	65
AvatarOn - It's also a Switch.....	69
Kavacha - Weather Protected Series.....	76
Metal Boxes .....	77
WiserTM.....	78
Surface and Flush Mount Occupancy Sensors.....	79
Dimmable Sensors with Light Regulation.....	79
Wall Mount Sensors.....	80
Hotel - ELV Dual Motion Sensor .....	80

# Acti 9 | Advanced Communication Technology that Inspires

## > Protection devices

- Miniature circuit breakers
- Residual current circuit breakers
- Vigi™ residual current devices
- Surge Protection Devices

## > Protection monitoring and supervision

- Indication and tripping auxiliaries
- Remote control auxiliaries
- Automatic reclosure auxiliaries



Innovative  
Protection monitoring Total control and  
Metering @ DB level



Efficient  
Manage loads, reduce operating and project  
costs, and accurately plan maintenance

## > Control and monitoring

- Contactors
- Impulse relays
- Integrated control circuit breakers
- Light indicators
- Push-buttons and selector switches
- Communication Architecture

## > Installation system

- IP20B terminals
- Splitter blocks
- Full range of mounting and wiring accessories



Reliable

100 percent MCB and RCD coordination, easy ordering and design, error free fast connections

# Acti 9 | Advanced Communication Technology that Inspires.....

## > Innovative


- Centralized control system including energy metering
- Large and variable data reading and computing through universal Modbus protocol

## > Efficient

- One-click, prefabricated wiring for comprehensive communication between your distribution board or panel and any facility management system

## > Reliable


- Error proof connection leading to reduction in downtime
- EMC tested for immunity, radiated and conducted safety

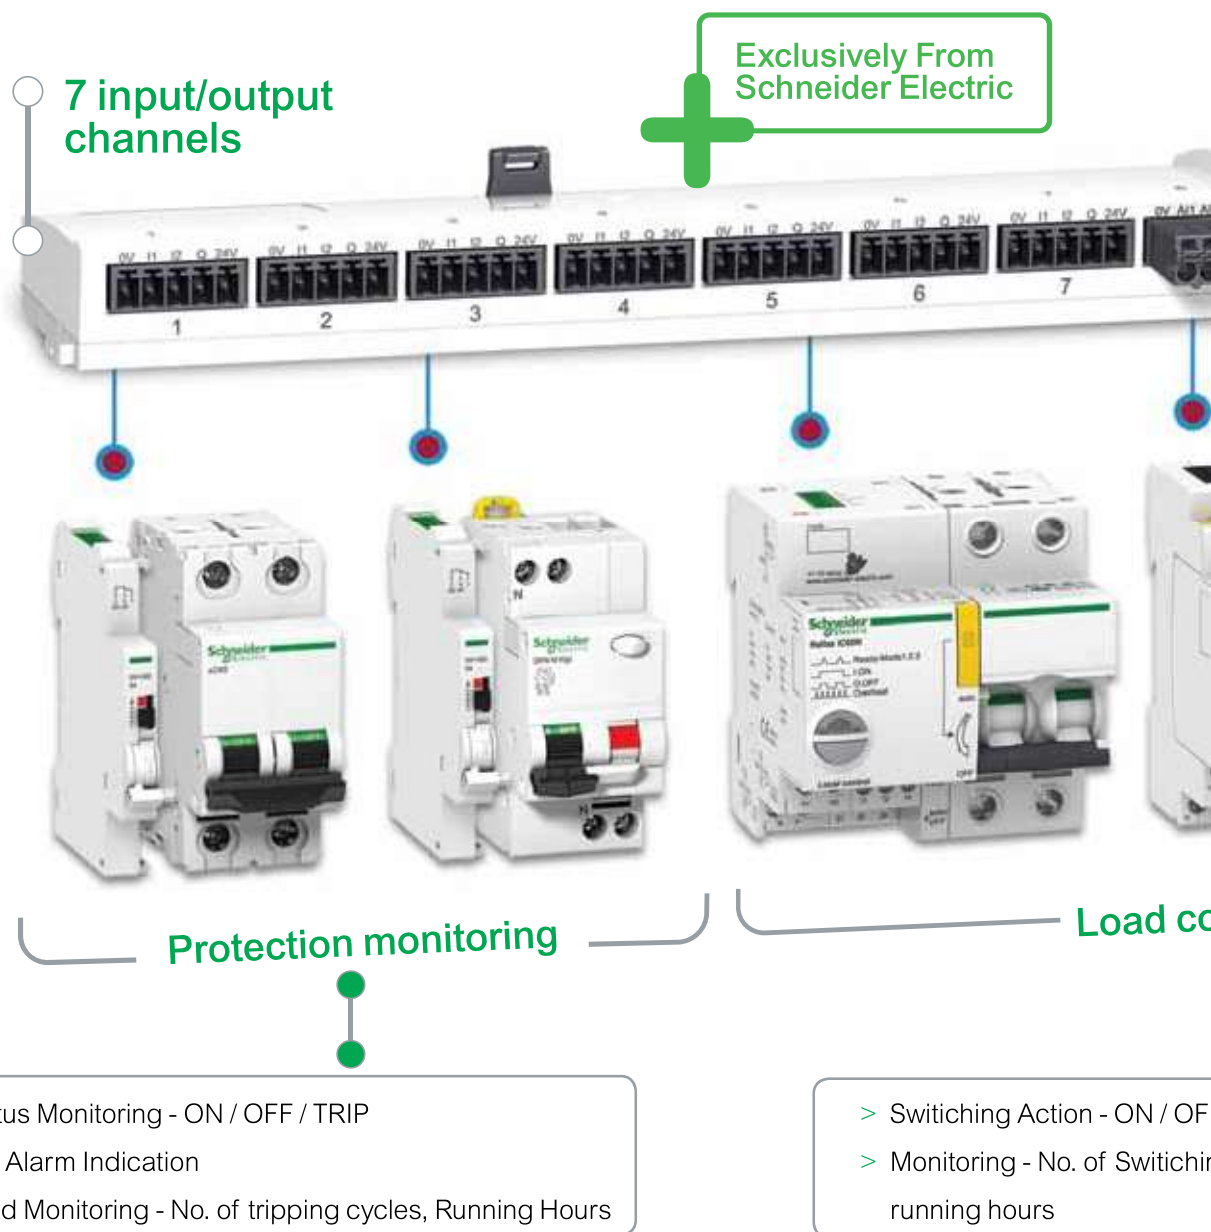

Meets the challenge of all your applications

Detailed load control, reduced downtime and accurately planned maintenance

# Ready to connect to any facility management solution

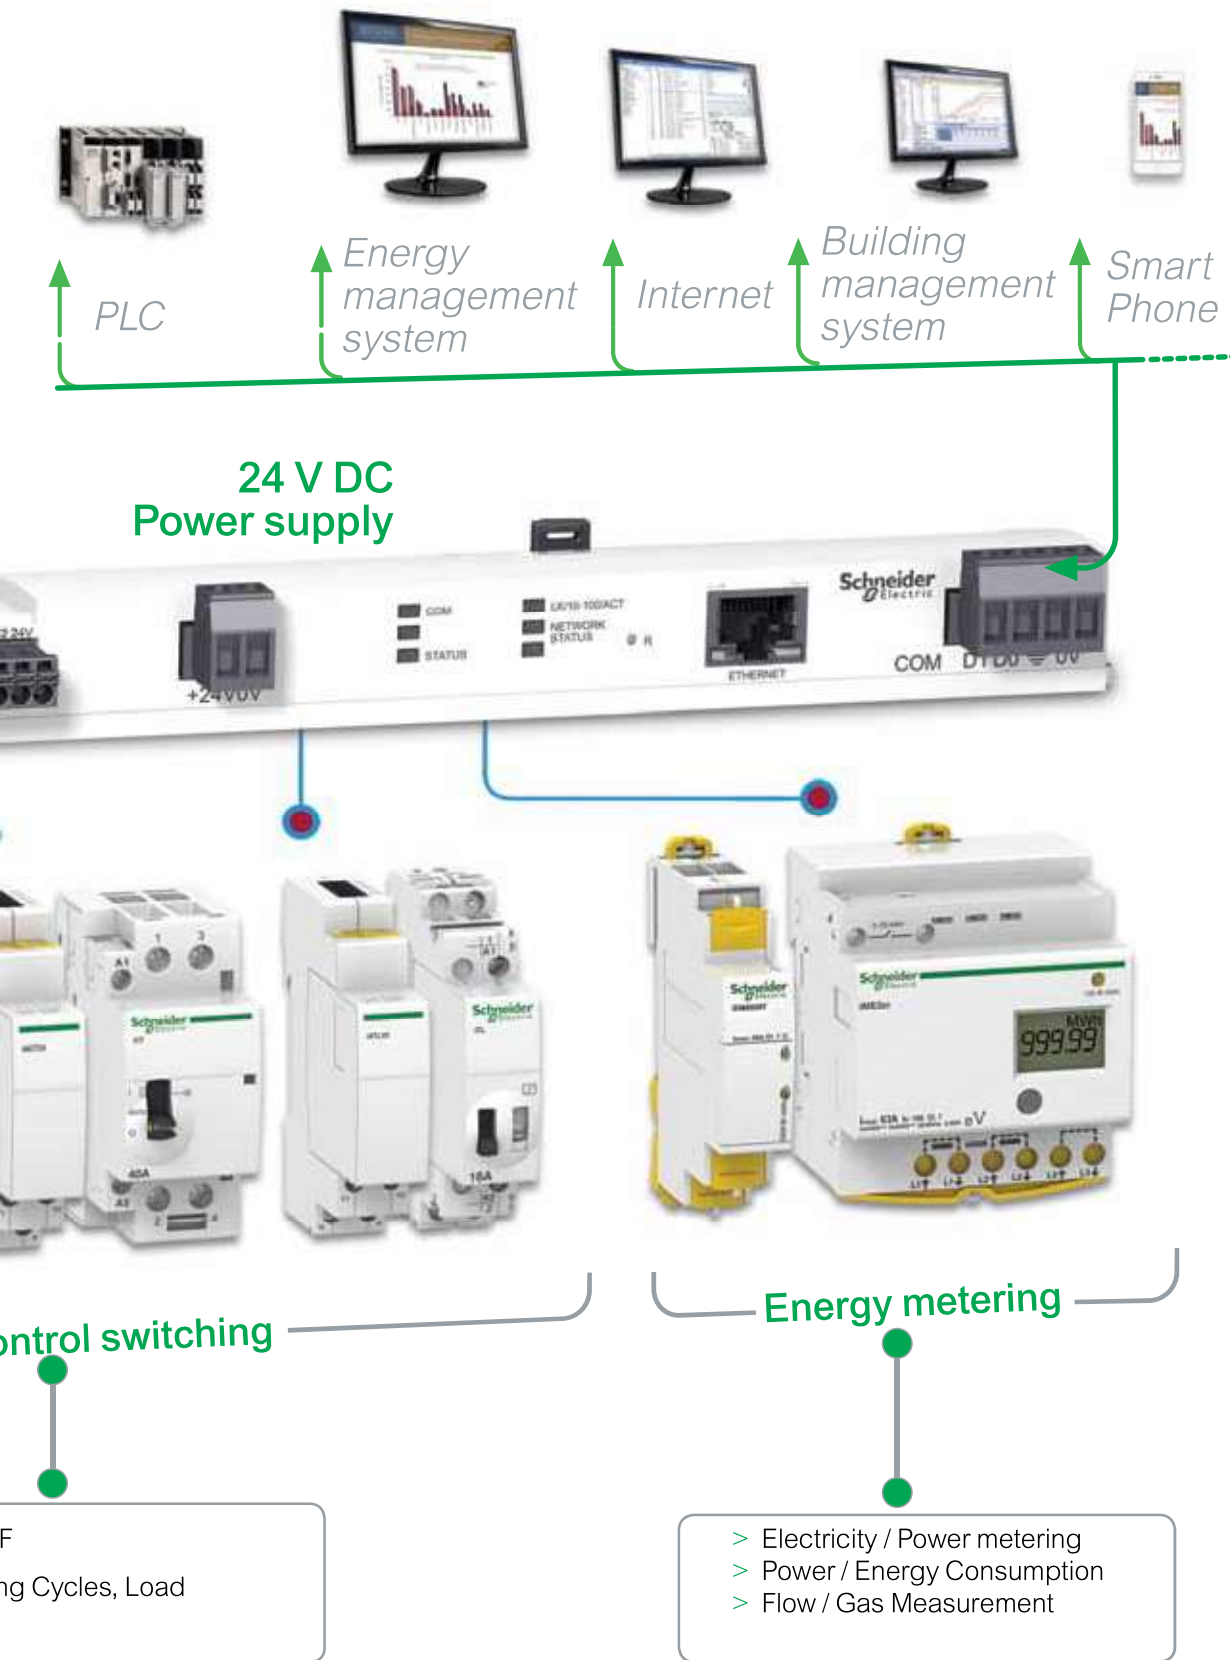

Environmental data program  
REACH, RoHS, PEP, EOL compliant

### AC Miniature Circuit Breakers - xC60 - IS/IEC 60898-1



- Breaking Capacity as per IEC 60898 and IS/IEC 60898-1, Icn = 10kA
- Can be used for DC application upto 60V per pole
- Higher Installation Life: Energy Limitation Class 3, Fast Closure Mechanism
- Ease, Speed and Flexibility of installation - Biconnect, Line-Load Reversible
- Field-fittable auxiliaries for advance protection and monitoring
- Positive Contact Indication for assurance of disconnection

[In] Rated Current (A)	1 Pole Reference	Unit MRP [₹]	2 Pole Reference	Unit MRP [₹]	3 Pole Reference	Unit MRP [₹]	4 Pole Reference	Unit MRP [₹]
Module Width**	1 mod		2 mod		3 mod		4 mod	
MOQ	12 Nos.		6 Nos.		4 Nos.		3 Nos.	
<b>B curve</b>								
6	A9N1P06BGN <input checked="" type="checkbox"/>	502	A9N2P06BGN <input checked="" type="checkbox"/>	1516	A9N3P06BGN <input checked="" type="checkbox"/>	2515	A9N4P06BGN	3212
10	A9N1P10BGN <input checked="" type="checkbox"/>	502	A9N2P10BGN <input checked="" type="checkbox"/>	1516	A9N3P10BGN <input checked="" type="checkbox"/>	2515	-	-
16	A9N1P16BGN <input checked="" type="checkbox"/>	502	A9N2P16BGN <input checked="" type="checkbox"/>	1516	A9N3P16BGN <input checked="" type="checkbox"/>	2515	A9N4P16BGN	3212
20	A9N1P20BGN <input checked="" type="checkbox"/>	502	A9N2P20BGN <input checked="" type="checkbox"/>	1516	A9N3P20BGN	2515	-	-
25	A9N1P25BGN <input checked="" type="checkbox"/>	502	-	-	A9N3P25BGN <input checked="" type="checkbox"/>	2515	-	-
32	A9N1P32BGN <input checked="" type="checkbox"/>	502	A9N2P32BGN	1516	A9N3P32BGN <input checked="" type="checkbox"/>	2515	A9N4P32BGN	3212
40	A9N1P40BGN <input checked="" type="checkbox"/>	1090	-	-	A9N3P40BGN	3432	A9N4P40BGN	4878
63	A9N1P63BGN <input checked="" type="checkbox"/>	1105	-	-	A9N3P63BGN <input checked="" type="checkbox"/>	3863	A9N4P63BGN	4923
<b>C curve</b>								
1	A9N1P01CGN <input checked="" type="checkbox"/>	770	A9N2P01CGN <input checked="" type="checkbox"/>	2089	A9N3P01CGN <input checked="" type="checkbox"/>	3313	A9N4P01CGN <input checked="" type="checkbox"/>	4169
2	A9N1P02CGN <input checked="" type="checkbox"/>	770	A9N2P02CGN	2099	A9N3P02CGN <input checked="" type="checkbox"/>	3313	A9N4P02CGN <input checked="" type="checkbox"/>	4169
3	A9N1P03CGN <input checked="" type="checkbox"/>	770	A9N2P03CGN <input checked="" type="checkbox"/>	2099	A9N3P03CGN <input checked="" type="checkbox"/>	3313	-	-
4	A9N1P04CGN <input checked="" type="checkbox"/>	770	A9N2P04CGN <input checked="" type="checkbox"/>	2099	A9N3P04CGN <input checked="" type="checkbox"/>	3313	A9N4P04CGN <input checked="" type="checkbox"/>	4169
6	A9N1P06CGN <input checked="" type="checkbox"/>	456	A9N2P06CGN <input checked="" type="checkbox"/>	1516	A9N3P06CGN <input checked="" type="checkbox"/>	2515	A9N4P06CGN <input checked="" type="checkbox"/>	3389
10	A9N1P10CGN <input checked="" type="checkbox"/>	456	A9N2P10CGN <input checked="" type="checkbox"/>	1516	A9N3P10CGN <input checked="" type="checkbox"/>	2515	A9N4P10CGN <input checked="" type="checkbox"/>	3389
16	A9N1P16CGN <input checked="" type="checkbox"/>	456	A9N2P16CGN <input checked="" type="checkbox"/>	1516	A9N3P16CGN <input checked="" type="checkbox"/>	2515	A9N4P16CGN <input checked="" type="checkbox"/>	3389
20	A9N1P20CGN <input checked="" type="checkbox"/>	456	A9N2P20CGN <input checked="" type="checkbox"/>	1516	A9N3P20CGN <input checked="" type="checkbox"/>	2515	A9N4P20CGN <input checked="" type="checkbox"/>	3389
25	A9N1P25CGN <input checked="" type="checkbox"/>	456	A9N2P25CGN <input checked="" type="checkbox"/>	1516	A9N3P25CGN <input checked="" type="checkbox"/>	2515	A9N4P25CGN <input checked="" type="checkbox"/>	3389
32	A9N1P32CGN <input checked="" type="checkbox"/>	456	A9N2P32CGN <input checked="" type="checkbox"/>	1516	A9N3P32CGN <input checked="" type="checkbox"/>	2515	A9N4P32CGN <input checked="" type="checkbox"/>	3389
40	A9N1P40CGN <input checked="" type="checkbox"/>	1090	A9N2P40CGN <input checked="" type="checkbox"/>	2440	A9N3P40CGN <input checked="" type="checkbox"/>	3830	A9N4P40CGN <input checked="" type="checkbox"/>	4923
50	A9N1P50CGN	1090	A9N2P50CGN	2440	A9N3P50CGN	3830	A9N4P50CGN	4923
63	A9N1P63CGN <input checked="" type="checkbox"/>	1105	A9N2P63CGN <input checked="" type="checkbox"/>	2461	A9N3P63CGN <input checked="" type="checkbox"/>	3957	A9N4P63CGN <input checked="" type="checkbox"/>	5127
<b>D curve</b>								
2	A9N1P02DGN <input checked="" type="checkbox"/>	777	A9N2P02DGN <input checked="" type="checkbox"/>	2121	-	-	-	-
3	A9N1P03DGN <input checked="" type="checkbox"/>	777	A9N2P03DGN	2121	A9N3P03DGN <input checked="" type="checkbox"/>	3363	-	-
4	A9N1P04DGN <input checked="" type="checkbox"/>	777	A9N2P04DGN <input checked="" type="checkbox"/>	2121	A9N3P04DGN <input checked="" type="checkbox"/>	3363	-	-
6	A9N1P06DGN <input checked="" type="checkbox"/>	655	A9N2P06DGN <input checked="" type="checkbox"/>	1589	A9N3P06DGN <input checked="" type="checkbox"/>	2649	-	-
10	A9N1P10DGN <input checked="" type="checkbox"/>	655	A9N2P10DGN <input checked="" type="checkbox"/>	1589	A9N3P10DGN <input checked="" type="checkbox"/>	2649	-	-
16	A9N1P16DGN <input checked="" type="checkbox"/>	655	A9N2P16DGN <input checked="" type="checkbox"/>	1589	A9N3P16DGN <input checked="" type="checkbox"/>	2649	A9N4P16DGN <input checked="" type="checkbox"/>	3514
20	A9N1P20DGN <input checked="" type="checkbox"/>	655	A9N2P20DGN <input checked="" type="checkbox"/>	1589	A9N3P20DGN <input checked="" type="checkbox"/>	2649	A9N4P20DGN <input checked="" type="checkbox"/>	3514
25	A9N1P25DGN <input checked="" type="checkbox"/>	655	A9N2P25DGN <input checked="" type="checkbox"/>	1589	A9N3P25DGN <input checked="" type="checkbox"/>	2649	A9N4P25DGN <input checked="" type="checkbox"/>	3514
32	A9N1P32DGN <input checked="" type="checkbox"/>	655	A9N2P32DGN <input checked="" type="checkbox"/>	1589	A9N3P32DGN <input checked="" type="checkbox"/>	2649	A9N4P32DGN <input checked="" type="checkbox"/>	3514
40	A9N1P40DGN <input checked="" type="checkbox"/>	1177	A9N2P40DGN <input checked="" type="checkbox"/>	2579	A9N3P40DGN <input checked="" type="checkbox"/>	4058	A9N4P40DGN <input checked="" type="checkbox"/>	5088
50	-	-	-	-	A9N3P50DGN	4058	-	-
63	A9N1P63DGN <input checked="" type="checkbox"/>	1191	A9N2P63DGN <input checked="" type="checkbox"/>	2610	A9N3P63DGN <input checked="" type="checkbox"/>	4094	A9N4P63DGN <input checked="" type="checkbox"/>	5141

Please contact Customer Care Center for Stockable and Non stockable status of references.

NORMAL STOCK ITEMS

W.E.F. January 15<sup>th</sup>, 2026

### AC Miniature Circuit Breakers - XC60 - IEC - 60947-2



- Breaking Capacity as per IEC 60947-2, Icu = 15kA\*\*\*
- Can be used for DC application upto 60V per pole
- Higher system performance with optimized cost: Cascading\*
- Increased System Continuity: Discrimination\*
- Higher Installation Life: Energy Limitation Class 3, Fast Closure Mechanism
- Ease, Speed and Flexibility of installation - Biconnect, Line-Load Reversible
- Field-fittable auxiliaries for advance protection and monitoring
- Positive Contact Indication for assurance of disconnection

[In] Rated Current (A)	1 Pole Reference	Unit MRP [₹]	2 Pole Reference	Unit MRP [₹]	3 Pole Reference	Unit MRP [₹]	4 Pole Reference	Unit MRP [₹]
<b>Module Width**</b>	<b>1 mod</b>		<b>2 mod</b>		<b>3 mod</b>		<b>4 mod</b>	
<b>MOQ</b>	<b>12 Nos.</b>		<b>6 Nos.</b>		<b>4 Nos.</b>		<b>3 Nos.</b>	
<b>B curve</b>								
6	A9N1P06BIN <input checked="" type="checkbox"/>	517	A9N2P06BIN <input checked="" type="checkbox"/>	1561	A9N3P06BIN <input checked="" type="checkbox"/>	2591	-	-
10	A9N1P10BIN <input checked="" type="checkbox"/>	517	A9N2P10BIN <input checked="" type="checkbox"/>	1561	A9N3P10BIN <input checked="" type="checkbox"/>	2591	-	-
16	A9N1P16BIN <input checked="" type="checkbox"/>	517	A9N2P16BIN <input checked="" type="checkbox"/>	1561	A9N3P16BIN <input checked="" type="checkbox"/>	2591	-	-
20	A9N1P20BIN <input checked="" type="checkbox"/>	517	A9N2P20BIN <input checked="" type="checkbox"/>	1561	-	-	-	-
25	A9N1P25BIN <input checked="" type="checkbox"/>	517	-	-	A9N3P25BIN <input checked="" type="checkbox"/>	2591	-	-
32	A9N1P32BIN <input checked="" type="checkbox"/>	517	-	-	A9N3P32BIN <input checked="" type="checkbox"/>	2591	A9N4P32BIN <input checked="" type="checkbox"/>	3491
40	A9N1P40BIN <input checked="" type="checkbox"/>	1123	-	-	-	-	A9N4P40BIN <input checked="" type="checkbox"/>	5024
63	A9N1P63BIN <input checked="" type="checkbox"/>	1138	-	-	A9N3P63BIN <input checked="" type="checkbox"/>	3979	A9N4P63BIN <input checked="" type="checkbox"/>	5071
<b>C curve</b>								
1	A9N1P01CIN <input checked="" type="checkbox"/>	793	A9N2P01CIN <input checked="" type="checkbox"/>	2162	A9N3P01CIN <input checked="" type="checkbox"/>	3412	A9N4P01CIN <input checked="" type="checkbox"/>	4294
2	A9N1P02CIN <input checked="" type="checkbox"/>	793	A9N2P02CIN <input checked="" type="checkbox"/>	2162	A9N3P02CIN <input checked="" type="checkbox"/>	3412	A9N4P02CIN <input checked="" type="checkbox"/>	4294
3	A9N1P03CIN <input checked="" type="checkbox"/>	793	A9N2P03CIN <input checked="" type="checkbox"/>	2162	A9N3P03CIN <input checked="" type="checkbox"/>	3412	-	-
4	A9N1P04CIN <input checked="" type="checkbox"/>	793	A9N2P04CIN <input checked="" type="checkbox"/>	2162	A9N3P04CIN <input checked="" type="checkbox"/>	3412	A9N4P04CIN <input checked="" type="checkbox"/>	4294
6	A9N1P06CIN <input checked="" type="checkbox"/>	470	A9N2P06CIN <input checked="" type="checkbox"/>	1561	A9N3P06CIN <input checked="" type="checkbox"/>	2591	A9N4P06CIN <input checked="" type="checkbox"/>	3491
10	A9N1P10CIN <input checked="" type="checkbox"/>	470	A9N2P10CIN <input checked="" type="checkbox"/>	1561	A9N3P10CIN <input checked="" type="checkbox"/>	2591	A9N4P10CIN <input checked="" type="checkbox"/>	3491
16	A9N1P16CIN <input checked="" type="checkbox"/>	470	A9N2P16CIN <input checked="" type="checkbox"/>	1561	A9N3P16CIN <input checked="" type="checkbox"/>	2591	A9N4P16CIN <input checked="" type="checkbox"/>	3491
20	A9N1P20CIN <input checked="" type="checkbox"/>	470	A9N2P20CIN <input checked="" type="checkbox"/>	1561	A9N3P20CIN <input checked="" type="checkbox"/>	2591	A9N4P20CIN <input checked="" type="checkbox"/>	3491
25	A9N1P25CIN <input checked="" type="checkbox"/>	470	A9N2P25CIN <input checked="" type="checkbox"/>	1561	A9N3P25CIN <input checked="" type="checkbox"/>	2591	A9N4P25CIN <input checked="" type="checkbox"/>	3491
32	A9N1P32CIN <input checked="" type="checkbox"/>	470	A9N2P32CIN <input checked="" type="checkbox"/>	1561	A9N3P32CIN <input checked="" type="checkbox"/>	2591	A9N4P32CIN <input checked="" type="checkbox"/>	3491
40	A9N1P40CIN <input checked="" type="checkbox"/>	1123	A9N2P40CIN <input checked="" type="checkbox"/>	2514	A9N3P40CIN <input checked="" type="checkbox"/>	3945	A9N4P40CIN <input checked="" type="checkbox"/>	5071
50	A9N1P50CIN <input checked="" type="checkbox"/>	1123	A9N2P50CIN <input checked="" type="checkbox"/>	2514	A9N3P50CIN <input checked="" type="checkbox"/>	3945	A9N4P50CIN <input checked="" type="checkbox"/>	5071
63	A9N1P63CIN <input checked="" type="checkbox"/>	1138	A9N2P63CIN <input checked="" type="checkbox"/>	2537	A9N3P63CIN <input checked="" type="checkbox"/>	4076	A9N4P63CIN <input checked="" type="checkbox"/>	5282
<b>D curve</b>								
2	A9N1P02DIN <input checked="" type="checkbox"/>	800	A9N2P02DIN <input checked="" type="checkbox"/>	2185	-	-	-	-
3	A9N1P03DIN <input checked="" type="checkbox"/>	800	-	-	A9N3P03DIN <input checked="" type="checkbox"/>	3465	-	-
4	A9N1P04DIN <input checked="" type="checkbox"/>	800	A9N2P04DIN <input checked="" type="checkbox"/>	2185	A9N3P04DIN <input checked="" type="checkbox"/>	3465	-	-
6	A9N1P06DIN <input checked="" type="checkbox"/>	675	A9N2P06DIN <input checked="" type="checkbox"/>	1638	A9N3P06DIN <input checked="" type="checkbox"/>	2730	-	-
10	A9N1P10DIN <input checked="" type="checkbox"/>	675	A9N2P10DIN <input checked="" type="checkbox"/>	1638	A9N3P10DIN <input checked="" type="checkbox"/>	2730	-	-
16	A9N1P16DIN <input checked="" type="checkbox"/>	675	A9N2P16DIN <input checked="" type="checkbox"/>	1638	A9N3P16DIN <input checked="" type="checkbox"/>	2730	A9N4P16DIN <input checked="" type="checkbox"/>	3620
20	A9N1P20DIN <input checked="" type="checkbox"/>	675	A9N2P20DIN <input checked="" type="checkbox"/>	1638	A9N3P20DIN <input checked="" type="checkbox"/>	2730	A9N4P20DIN <input checked="" type="checkbox"/>	3620
25	A9N1P25DIN <input checked="" type="checkbox"/>	675	A9N2P25DIN <input checked="" type="checkbox"/>	1638	A9N3P25DIN <input checked="" type="checkbox"/>	2730	A9N4P25DIN <input checked="" type="checkbox"/>	3620
32	A9N1P32DIN <input checked="" type="checkbox"/>	675	A9N2P32DIN <input checked="" type="checkbox"/>	1638	A9N3P32DIN <input checked="" type="checkbox"/>	2730	A9N4P32DIN <input checked="" type="checkbox"/>	3620
40	A9N1P40DIN <input checked="" type="checkbox"/>	1213	A9N2P40DIN <input checked="" type="checkbox"/>	2657	A9N3P40DIN <input checked="" type="checkbox"/>	4180	A9N4P40DIN <input checked="" type="checkbox"/>	5242
50	-	-	-	-	A9N3P50DIN <input checked="" type="checkbox"/>	4180	A9N4P50DIN <input checked="" type="checkbox"/>	5242
63	A9N1P63DIN <input checked="" type="checkbox"/>	1226	A9N2P63DIN <input checked="" type="checkbox"/>	2689	A9N3P63DIN <input checked="" type="checkbox"/>	4217	A9N4P63DIN <input checked="" type="checkbox"/>	5295

\*\*\*Coming Soon

Please contact Customer Care Center for Stockable and Non stockable status of references.

NORMAL STOCK ITEMS

W.E.F. January 15<sup>th</sup>, 2026

### DC Miniature Circuit Breakers - C60H



- Specially designed MCB for enhanced protection in DC installation
- Magnetic Arc Chutes to quick break DC current in event of fault
- Breaking capacity 6kA as per IEC 60947-2
- Voltage Rating: 1P - 250 V DC & 2P - 500 V DC
- Impulse Voltage: 6 kV
- Higher Installation Life: Energy Limiting Class: 3

[In] Rated Current (A)	Module Width 18mm/ module	1 Pole Reference	Unit MRP [₹]	Module Width 18mm/ module	2 Pole Reference	Unit MRP [₹]
MOQ		12 Nos.		6 Nos.		
<b>C60H-DC</b>						
0.5	1	A9N61500	1948	2	A9N61520	4278
1	1	A9N61501 <input checked="" type="checkbox"/>	1421	2	A9N61521 <input checked="" type="checkbox"/>	2932
2	1	A9N61502 <input checked="" type="checkbox"/>	1421	2	A9N61522 <input checked="" type="checkbox"/>	2932
3	1	A9N61503 <input checked="" type="checkbox"/>	1421	2	A9N61523 <input checked="" type="checkbox"/>	2932
4	1	A9N61504 <input checked="" type="checkbox"/>	1421	2	A9N61524 <input checked="" type="checkbox"/>	2932
5	1	A9N61505	1421	2	A9N61525	2932
6	1	A9N61506 <input checked="" type="checkbox"/>	1167	2	A9N61526 <input checked="" type="checkbox"/>	2386
10	1	A9N61508 <input checked="" type="checkbox"/>	1167	2	A9N61528 <input checked="" type="checkbox"/>	2386
16	1	A9N61511 <input checked="" type="checkbox"/>	1167	2	A9N61531 <input checked="" type="checkbox"/>	2386
20	1	A9N61512 <input checked="" type="checkbox"/>	1167	2	A9N61532 <input checked="" type="checkbox"/>	2386
25	1	A9N61513 <input checked="" type="checkbox"/>	1167	2	A9N61533 <input checked="" type="checkbox"/>	2386
32	1	A9N61515 <input checked="" type="checkbox"/>	1345	2	A9N61535 <input checked="" type="checkbox"/>	2386
40	1	A9N61517 <input checked="" type="checkbox"/>	1600	2	A9N61537 <input checked="" type="checkbox"/>	3518
50	1	A9N61518 <input checked="" type="checkbox"/>	1600	2	A9N61538 <input checked="" type="checkbox"/>	3518
63	1	A9N61519 <input checked="" type="checkbox"/>	1600	2	A9N61539 <input checked="" type="checkbox"/>	3518

### Special application MCBs



#### Solar Application – PV DC

- DC MCB for multi string PV installations
- Operating Voltage: 800V DC
- Current Rating up to 25A
- Complies to IEC / EN 60947-2

#### Rail Application\* (including Rolling Stock)

- Shock & vibration resistant (IEC 61373) – Cat 1, Class B
- Complies to EN 45545 HL2
- Complies to IEC / EN 60947-2

#### UL MCB

- Type: UL1077, UL489
- Breaking Capacity of 10kA
- Complies to IEC 60947-2 / UL1077 / UL489 / CSA

#### Note:

Please contact nearest Schneider Electric sales office or Customer Care for Reference and prices of Application Specific MCBs

\*Rail Application RCDs are also available on demand \*\*18mm/module

# Residual Current Devices (RCDs) - For Human and Fire Protection



**30  
mA**

Use of **30mA RCDs** is now **mandatory** for all **domestic intallations** in India (NEC 2023)



**Schneider Electric provides voltage independent RCDs** which work on current sensing technology and provide protection from residual current even at extra low voltages (down to zero volts) and in case of break of neutral.

**SI  
Type**

**Schneider Electric offers SI RCD built to operate in electrically polluted or installation in aggressive environments:**

- Flourescent / Variable lighting with Electronic ballast
- Powerful IT / Telecom equipment / Air conditioning
- Severe Atmosphere - High lighting risk / Swimming pools

\* for Measures relating to Safety and Electric supply

### AC Residual Current Circuit Breakers - xID



- Complies to IEC/EN 61008-1 and IS 12640
- AC Type
- Selective range available for time based discrimination
- Easy Monitoring: Earth fault indication and Test Button on front face
- Operating temperature up to +70°C
- Mandatory to use OF-S auxiliary to add any indication or tripping auxiliary

[In] Rated Current (A)	Earth-Leakage Sensitivity (mA)	Module Width 18mm/module	2 Pole Reference	Unit MRP [₹]	Module Width 18mm/module	4 Pole Reference	Unit MRP [₹]
25	30	2	A9N16201	5158	4	A9N16251	7240
	100	2	A9N16203	5725	4	A9N16253	7694
	300	2	A9N16202	5899	4	A9N16252	7921
40	30	2	A9N16204	6072	4	A9N16254	7127
	100	2	A9N16205	6546	4	A9N16255	7737
	300	2	A9N16206	6866	4	A9N16256	8035
63	30	2	A9N16208	7312	4	A9N16258	8253
	100	2	A9N16209	7863	4	A9N16259	9141
	300	2	A9N16210	8021	4	A9N16260	9183
80	30	2	A9N16212	12291	4	A9N16261	14558
	100	2	A9N16213	12496	4	A9N16262	14793
	300	2	-	-	4	A9N16263	14872

### AC Residual Current Circuit Breakers (RCCBs) - ID



- Complies to IEC 61008-1
- AC Type
- Degree of pollution: 3 (suitable for industrial environment)
- Electrical ON/OFF indication by using OFSP auxiliary

Poles Description	[In] Rated Current (A)	Earth-Leakage Sensitivity (mA)	Module Width 18mm/module	Reference	Unit MRP [₹]
4P	100	30	4	**A9R11491	On Request
		100	4	**A9R12491	On Request
	125	30	4	A9R11492	On Request
		100	4	A9R12492	On Request
		300	4	A9R14492	On Request

Note: \*\*For 100A RCCB Auxiliary kindly contact Customer Care

### AC Residual Current Breaker Overload (RCBO) - DPN N Vigi



- Complies to IEC/EN 61009
- AC Type Tripping characteristics - C curve
- Overvoltage category (IEC 60364): IV
- Suitable for indication & tripping auxiliaries

Poles Description	[In] Rated Current (A)	Earth-Leakage Sensitivity (mA)	Module Width 18mm/module	Reference	Unit MRP [₹]
1P+N	6	30	2	A9N19661	7964
		300	2	A9N19681	8089
	10	30	2	A9N19663	7964
		300	2	A9N19683	8089
	16	30	2	A9N19665	7964
		300	2	A9N19685	8089
	20	30	2	A9N19666	7964
		300	2	A9N19686	8089
	25	30	2	A9N19667	7964
		300	2	A9N19687	8089
	32	30	2	A9N19668	7964
		300	2	A9N19688	8492
	40	30	2	A9N19669	10076
		300	2	A9N19689	10251

Note: Application specific RCDs also available with 10mA, 500mA and 1000mA sensitivities

Please contact nearest Schneider Electric Sales Office or Customer Care Center for Reference and Prices

Please contact Customer Care Center for Stockable and Non stockable status of references.

✓ NORMAL STOCK ITEMS

W.E.F. January 15<sup>th</sup>, 2026

## SI Type Residual Current Circuit Breakers (RCCBs) - xID SI



- Complies to IEC/EN 61008-1
- SI RCDs offer enhanced immunity against Electrical Disturbances; Polluted and Corrosive environments - Guaranteed performance in harsh operating conditions
- Ensures continuity of supply in networks with:
  - Transient overvoltages
  - Loads generating HF leakage current i.e. harmonics
  - Loads generating continuous leakage current
- Ensures tripping on genuine earth fault in networks with:
  - Pulsating DC components
  - HF applications which “Blinds” (non-tripping) the conventional RCDs

[In] Rated Current (A)	Earth-Leakage Sensitivity (mA)	Module Width 18mm/module	2 Pole Reference	Unit MRP [₹]	Module Width 18mm/module	4 Pole Reference	Unit MRP [₹]
25	30	2	A9N16234	12000	4	A9N16321	13374
40	30	2	A9N16237	12604	4	A9N16324	13796
63	30	2	A9N16240	12966	4	A9N16327	14165
63	300	2	A9N16246	13064	4	-	-

## Vigi Block for xC60 (Add-on RCD Module, 2 & 4 Pole)



- Flexibility to use MCB of any tripping curve to suit applications, ensuring best 3 in 1 protection
- No auxiliary supply required
- AC Class protection
- Degree of pollution: 3 (suitable for industrial environment)
- Immune to nuisance tripping due to transient over voltages

[In] Rated Current (A)	Earth-Leakage Sensitivity (mA)	Module Width 18mm/module	2 Pole Reference	Unit MRP [₹]	Module Width 18mm/module	4 Pole Reference	Unit MRP [₹]
25	30	1.5	A9N26581	9535	3	A9N26595	12032
	100	1.5	A9N26582	10495	3	A9N26596	10685
	300	1.5	A9N26583	11096	3	A9N26597	11500
63	30	2	A9N26611	11536	3.5	A9N26643	11579
	100	2	A9N26612	12217	3.5	A9N26644	12027
	300	2	-	-	3.5	A9N26645	12583

**Note:** Vigi Block for High Rating up to 125A (C120) and High Breaking Capacity (NG125) available on demand

## SI Type Residual Current Breaker Overload (RCBO) - DPN N Vigi SI



- Complies to IEC/EN 61009
- Ensures continuity of supply in networks with:
  - Transient overvoltages
  - Loads generating HF leakage current i.e. harmonics
  - Loads generating continuous leakage current
- Ensures tripping on genuine earth fault in networks with :
  - Pulsating DC components
  - HF applications which “Blinds” (non-tripping) the conventional RCDs

Poles Description	[In] Rated Current (A)	Earth-Leakage Sensitivity (mA)	Module Width 18mm/module	Reference	Unit MRP [₹]
1P+N	6	30	2	A9N19631	15855
	10	30	2	A9N19632	15855
	16	30	2	A9N19634	15855
		300	2	A9N19644	15855
	25	30	2	A9N19636	15855
	32	30	2	A9N19637	15855
	40	30	2	A9N19638	18773
		300	2	A9N19648	20891

\*For Prices, please contact nearest Schneider Electric Sales Office or Customer Care Center are Center for Reference and Prices

Please contact Customer Care Center for Stockable and Non stockable status of references.

NORMAL STOCK ITEMS

W.E.F. January 15<sup>th</sup>, 2026

### Acti 9 Active AFDD

#### Make active safety your new standard

- Integrated arc fault protection for prevention against electrically ignited fires
- AFDD complies to IEC/EN 62606
- RCD complies to IEC/EN 61009-2-1
- Protection Against Series & Parallel Arc

Acti9 iCV40N VigiARC Active, 30 mA, A-SI type



- Ensures tripping on genuine earth fault in networks with :
  - Pulsating DC components
  - HF applications which "Blinds" (non-tripping) the conventional RCDs
- Available in C Curve Configuration

Poles Description	[In] Rated Current (A)	Earth-Leakage Sensitivity (mA)	Module Width 18mm/module	Reference	Unit LP [₹]
1P+N	6	30	2	A9TDNC606	On Request
	10	30	2	A9TDNC610	On Request
	16	30	2	A9TDNC616	On Request
	25	30	2	A9TDNC625	On Request
	32	30	2	A9TDNC632	On Request
	40	30	2	A9TDNC640	On Request

Acti9 iCV40H VigiARC Active, 30 mA, A-SI type




- Ensures tripping on genuine earth fault in networks with :
  - Pulsating DC components
  - HF applications which "Blinds" (non-tripping) the conventional RCDs
- Available in C Curve Configuration
- Seamless connectivity with Wiser 2.0 & ecostruxre through Panel server

Poles Description	[In] Rated Current (A)	Earth-Leakage Sensitivity (mA)	Module Width 18mm/module	Reference	Unit LP [₹]
1P+N	6	30	2	A9TDND606	On Request
	10	30	2	A9TDND610	On Request
	16	30	2	A9TDND616	On Request
	20	30	2	A9TDND620	On Request
	25	30	2	A9TDND625	On Request
	32	30	2	A9TDND632	On Request

### Common Auxiliaries for xC60 / RCDs Range

- Field-fittable auxiliaries (clip fitted) mounted on left side with maximum width of 54mm
- Order: Tripping Auxiliaries (MN first) followed by Indication Auxiliaries (SD first)

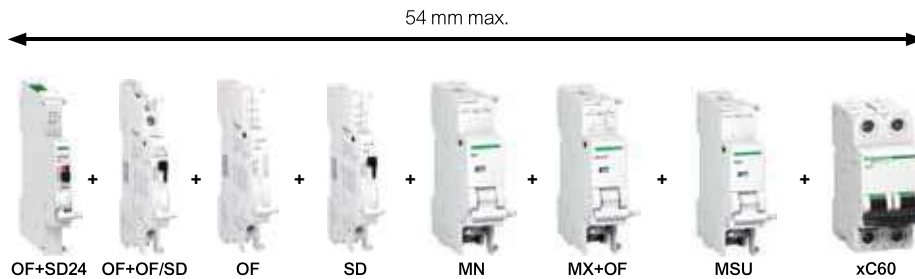

Type	Module Width 18mm/module	Reference	Unit MRP [₹]
<b>Indication Auxiliaries</b>			
Acti9 A9N iOF bottom wiring 0.1-6A aux	0.5	A9N26904	3413
Acti9 A9N SD bottom wiring 0.1-6A aux	0.5	A9N26907	1926
Acti9 A9N OF/SD+OF top/bt wir 0.1-6A aux	0.5	A9N26909	4905
Acti9 A9A iOF bottom wiring 0.1-6A aux	0.5	A9A26904	1701
Acti9 A9A iOF/SD+OF t&b wire 0.1-6A aux	0.5	A9A26909	5211
OF+SD24 auxiliary contact (ComReady)	0.5	A9N26899	4317
<b>Protection Auxiliaries – Trip Indication on front face</b>			
MN Under-voltage Release 220-240V AC		A9N26960	6937
MSU Over-voltage Release 275V AC	1	A9N26500	8214
<b>Tripping Auxiliaries – Trip Indication on front face</b>			
MX + OF Shunt Release 110-415V AC: for Remote tripping of Circuit Breaker	1	A9N26946	4512
MX + OF Shunt Release 12-24V AC/DC: for Remote tripping of Circuit Breaker		A9N26948	4512
<b>Auxiliary Switch for RCCBs – Mandatory for use of Auxiliaries with RCCBs</b>			
Auxiliary switch for RCCB up to 80A (OF-S)	0.5	A9N26923	7978
Auxiliary switch for RCCBs 125A (OFSP)	0.5	A9N16940	4052

### Accessories



Type	Description	Reference	Unit MRP [₹]
Rotary Handle*	Breaker Switching Sub-Assembly	27046	7262
Rotary Handle*	Extended, Disconnectable handle	27047	3667
Padlock** (bag of 2)		26970	1551
Aluminum cable terminal**		27060	913
Spacer		A9N27062	361

\* for xC60, C120, DPN N Vigi, C60H-DC, xSW - Multi poles only

#### Note:

For all above Reference MOQ = 1

Please contact Customer Care Center for Stockable and Non stockable status of references.

NORMAL STOCK ITEMS

W.E.F. January 15<sup>th</sup>, 2026

# Protection Against Lightning Strikes And Switching Surges



For all low voltage switchboards and electrical enclosures:

## Comprehensive range

- To ensure the protection of equipment connected to:
- Low voltage networks,
- Telecommunications networks,
- Computer networks.
- Easy to implement and use.
- Compatibility with all earthing systems (TT, TNS, TNC, IT).
- Technical and aesthetic consistency

## Continuity of service and certified safety

Schneider Electric certified coordination between the surge arrester and its disconnection circuit breaker.

Compliance with standards: IEC/EN 61643-11.



More and more electrical equipment today is sensitive to overvoltages caused by lightning.



# 90%

of power outlets supply equipment incorporating electronic devices.



iQuick PRD “built-in” technology surge arresters, a Schneider Electric innovation, incorporate their own disconnection circuit breaker: easy to choose and simple to install for greater effectiveness.



Up to **30%** of installation time saved.

### Surge Arresters - Type 1+ 2



- Complies to EN/IEC 61643 -11
- Withdraw able type: Easy Replacement
- Inbuilt SPD health Indicator: Also available with remote signaling
- For protection against Direct lightning surge, Indirect lightning surge, Switching surge
- Iimp up to 25kA & Imax upto 40kA
- **Always use a Back-up MCB with your SPD**
- Maximum Operating Voltage [Uc]: 350V

Type	Pole Description	Module Width 18mm/module	Reference	Unit MRP [₹]
PRD1 25r	1P	2	16329	24737
	1P + N	4	16330	44404
	3P	6	16331	69918
	3P + N	8	16332	86869

### Surge Arresters iPRD - Type 2 (Withdrawable type) (TT, TN-S, TN-C Systems)



- Complies to IEC 61643-11/2011 T2 and EN 61643-11
- For protection against Indirect lightning surge and Switching surge
- Inbuilt health Indicator
- Response time < 25ns
- Imax (8/20 s): 65/40/15/8kA
- Maximum Operating Voltage [Uc]: 340V
- Level of protection, Up: 1.0 - 2.0 kV
- Remote indication contact with 8r/20r/40r/65r
- **Always use a Back-up MCB with your SPD**

Type	Rated Voltage (V)	Pole Description	Module Width 18mm/module	Reference	Unit MRP [₹]
iPRD8	230	1P	1	A9L08100	6060
	230	1P+N	2	A9L08500	11559
	230/400	3P	3	A9L08300	15601
	230/400	3P+N	4	A9L08600	23548
iPRD8r	230	1P+N	2	A9L08501	13857
	230/400	3P+N	4	A9L08601	28258
iPRD20	230	1P	1	A9L20100	6792
	230	1P+N	2	A9L20500	14530
	230/400	3P	3	A9L20300	18600
iPRD20r	230/400	3P+N	4	A9L20600	26297
	230	1P+N	2	A9L20501	17023
	230/400	3P+N	4	A9L20601	32156
iPRD40	230	1P	1	A9L40100	8432
	230	1P+N	2	A9L40500	16735
	230/400	3P	3	A9L40300	24021
	230/400	3P+N	4	A9L40600	33496
iPRD40r	230	1P	1	A9L40101	9441
	230	1P+N	2	A9L40501	21574
	230/400	3P	3	A9L40301	32327
iPRD65r	230/400	3P+N	4	A9L40601	40202
	230	1P	1	A9L65101	12621
	230	1P+N	2	A9L65501	27496
iPRD65r	230/400	3P	3	A9L65301	35881
	230/400	3P+N	4	A9L65601	46557

### Spare Cartridges for iPRD



- Spare Cartridges for iPRD8r, iPRD20r, iPRD40r and iPRD65r
- End of life indication available on front face
- These Cartridges are not compatible with Old SPD range (A9L16...)\*\*

Type	Spare Cartridges for	Reference	Unit MRP [₹]
iPRD 65-350	iPRD65r	A9L65102	7901
iPRD 40-350	iPRD40, iPRD40r	A9L40102	6383
iPRD 20-350	iPRD20, iPRD20r	A9L20102	4872
iPRD Neutral	All products (1P+N, 3P+N)	A9L00002	6524

\*\*Spare Cartridges for Old SPD Range (A9L16...) are available on demand - please contact nearest Schneider Electric Sales Office or Customer Care for Reference and prices

#### Note:

For all above Reference MOQ = 1

Please contact Customer Care Center for Stockable and Non stockable status of references.

NORMAL STOCK ITEMS

W.E.F. January 15<sup>th</sup>, 2026

### iQuick PRD - Type 2 with inbuilt MCB



- Compact SPD with in-built back up MCB - saving on space, MCB selection, wiring time
- Complies to EN/IEC 61643-11
- Withdrawable Type - Cost Efficient - Allows damaged Cartridges to be replaced without having to replace entire SPD
- Inbuilt SPD Health Indicator on front face of device; Remote signaling functionality also available
- Incoming Protection: iQuick PRD 40r (High Risk level) and iQuick PRD 20r (Moderate Risk level)
- Secondary Protection: iQuick PRD 8r is cascade mounted with incoming surge arresters

Type	Pole Description	Module Width 18mm/module	Reference	Unit MRP [₹]
iQuick PRD 8r	1P+N	4	A9L16298	17406
	3P	6.5	A9L16299	28149
	3P+N	7.5	A9L16300	35026
iQuick PRD 20r	1P+N	4	A9L16295	21461
	3P	6.5	A9L16296	33792
	3P+N	7.5	A9L16297	42032
Quick PRD 40r	1P+N	4	A9L16292	26843
	3P	6.5	A9L16293	40215
	3P+N	7.5	A9L16294	49979

**Note:** Spare / Replacement Cartridges available - For Reference and prices contact nearest sales office or customer care

### Photovoltaic Surge Arresters



- Protection for photovoltaic panels and the DC input to the inverter from overvoltages due to a lightning strike
- Type 2 surge arresters
- Should be installed in switchboard inside the building. If switchboard is located outside, it must be weatherproof
- Withdrawable surge arrester allows damaged Cartridges to be replaced quickly
- Inbuilt SPD Health Indicator on front face of device; Remote signaling functionality also available

Type	U (cpv) Maximum Operating Voltage (V)	Module Width 18mm/module	Reference	Unit MRP [₹]
iPRD 40r	800	3	A9L40271	13235
	1000	3	A9L40281	16200

**Note:** Spare / Replacement Cartridges available - For Reference and prices contact nearest sales office or customer care

### Surge Arresters for Communication Networks



- Analogue telephone line protection: iPRC surge arrester wired in series to the private installation input, protects the telephones, the modems (including ADSL) etc
- Protection for 2 low-current lines without common potential or 4 lines with common reference potential
- iPRI protects measuring instrument and PLC sensor inputs and the DC power supply inputs up to 53 V and AC power supply inputs up to 37 V

Type	[Ue] Operational Voltage (V)	Module Width 18mm/module	Reference	Unit MRP [₹]
PRI	48 V DC	1	A9L16339	23606
PRC	130 V AC	1	A9L16337	14152

**Note:**

For all above Reference MOQ = 1

Please contact Customer Care Center for Stockable and Non stockable status of references.

NORMAL STOCK ITEMS

W.E.F. January 15<sup>th</sup>, 2026

### Isolator - xSW



- Complies to IEC/EN 60947-3
- Switching duty: AC - 22A
- Impulse Voltage
  - Upto 80 - 4kV
  - 100 & 125A - 6kV
- Rated short-time withstand current (Icw)
  - Upto 80A - 12.5In
  - 100 & 125A - 12 In for 1s

Poles Description	[In] Rated Current (A)	Module Width 18mm/module	MOQ	Reference	Unit MRP [₹]
2	40	2	6	A9S2P040	999
	63	2	6	A9S2P063	1320
3	40	3	4	A9S3P040	1745
	63	3	4	A9S3P063	2044
4	40	4	3	A9S4P040	2209
	63	4	3	A9S4P063	2406
	100	4	3	A9S4P100	4025
	125	4	3	A9S4P125	4448

### Selector Switch - iSSW



- Complies to IEC 60947-5-1 and IEC 60669-1
- Rating 20A, 250V AC
- Electrical life (AC22): 30,000 cycles
- Connection: tunnel terminals cables up to 10 sq. mm

No. of positions	Poles Description	Contacts	Module Width 18mm/module	MOQ	Reference	Unit MRP [₹]
2	1	1 C/O	1	12	A9E18070	2137
	2	2 C/O	2	6	A9E18071	2938
	2	1NO + 1NC	1	12	A9E18072	1713
3	1	1 C/O	1	12	A9E18073	1961
	2	2 C/O	2	6	A9E18074	3545

### iRO Buzzers



- Audible indication in housing and the tertiary sector
- Sound level of 70dBA at a distance of 60cm

Voltage	Module Width 18mm/module	Reference	Unit MRP [₹]
230V AC	1	A9A15322	2641

Please contact Customer Care Center for Stockable and Non stockable status of references.

NORMAL STOCK ITEMS

W.E.F. January 15<sup>th</sup>, 2026

### ICT Contactors



- Complies to IEC 1095, E N 61095
- 4 operating modes switch on front face :
  - Automatic mode
  - Temporary "ON" mode
  - Permanent "ON" mode
  - Shutdown
- Mechanical contact position Indicator
- Safe installation maintenance: lock the contactor in ON position
- Silent operation (20dB) for entire range

Type	Rating (A)	No. of Contacts	Module Width 18mm/module	Reference	Unit MRP [₹]
1P	25	1NO	1	A9C20731	3164
	16	2NO	1	A9C22712	3256
2P	25	2NO	1	A9C20732	3967
	40	2NO	2	A9C20842	8383
3P	63	2NO	2	A9C20862	8511
	25	3NO	2	A9C20833	5017
	40	3NO	2	A9C20843	11137
4P	63	3NO	3	A9C20863	12104
	25	4NO	2	A9C20834	5253
4P	40	4NO	2	A9C20844	12972
	63	4NO	3	A9C20864	13686
	63	2NO + 2NC	3	A9C20868	15820

**Note:** 100A Contactor in 2P / 4P - available on request

### iTL Impulse Relays



- Complies to IEC/EN 60669-2-2
- Safe maintenance: disconnection of remote control by selector switch
- Manual Controls on front face: 0-I toggle
- Mechanical contact position Indicator
- Maximum 5 operations/min. and 100 switching operations/day
- Degree of pollution: 3 (suitable for industrial environment)

Type	Rating (A)	Control Voltage	No. of Contacts	Module Width	Reference	Unit MRP [₹]
1P	16	230-240 VAC	1NO	1	A9C30811	2129
	32	230-240 VAC	1NO	1	A9C30831	2680
2P	16	230-240 VAC	2NO	1	A9C30812	3364
	32	230-240 VAC	2NO	1	A9C30831 + A9C32836	7746
3P	16	230-240 VAC	1NO+1NO/NC+1NO	2	A9C30811 + A9C32816	6193
	32	230-240 VAC	1NO+1NO/NC+1NO	2	A9C30831 + 2 x A9C32836	12812
4P	16	230-240 VAC	4NO	2	A9C30814	6503
	32	230-240 VAC	4NO	2	A9C30831 + 3 x A9C32836	17878

### iIL Indicator Lights



- Complies to IEC 60947-5-1
- Indicator light with LED technology
- Service life 100,000 hours with constant luminous efficiency

Type	Colour	Module Width 18mm/module	Reference	Unit MRP [₹]
Single Indicator light	Red	1	A9E18320	2121
	Green	1	A9E18321	2121
	Blue	1	A9E18323	2121
	Orange	1	A9E18324	2121
3 phase voltage presence light	Red/Red/Red	1	A9E18327	6243
Single Push Button (1 NO+ 1NC)	Grey	1	A9E18033	2830

**Note:** For all above Reference MOQ = 1

Please contact Customer Care Center for Stockable and Non stockable status of references.

NORMAL STOCK ITEMS

W.E.F. January 15<sup>th</sup>, 2026

## Communication Auxiliaries



Auxiliary for Protection Devices (OF+SD24)

Auxiliary for Contactors (iACT24)

Auxiliary for Impulse Relays (iATL24)

Description	Module Width	Reference	Unit MRP [₹]
OF+SD24	0.5	A9N26899	4317
iACT24	1	A9C15924	27914
iATL24	1	A9C15424	20910

## Reflex iC60 - Integrated Control & Overcurrent Protection Device



- All in One Solution: MCB + Contactor + Impulse Relay + Auxiliary
- 10kA Breaking capacity as per IEC/EN 60947-2
- Ti24 interface: Connection to PLC, Smartlink
- 3 operating modes to cater to a variety of applications
- Safe lock down with Integrated Padlocking
- Simplified maintenance: Front face Indicator allows better reliability

[In] Rated Current (A)	2 Pole Reference	Unit MRP [₹]	3 Pole Reference	Unit MRP [₹]	4 Pole Reference	Unit MRP [₹]
<b>Module Width **</b>	<b>4.5 mod</b>		<b>5.5 mod</b>		<b>6.5 mod</b>	
<b>B Curve</b>						
10	A9C61210	54628	-	-	-	-
<b>C Curve</b>						
10	A9C62210	58003	A9C62310	62122	-	-
16	A9C62216	58003	A9C62316	59976	A9C62416	62411
25	A9C62225	55233	A9C62325	58794	-	-
40	A9C62240	58174	-	-	A9C62440	68231
63	-	-	-	-	A9C62463	70007

Note: \*\*18mm/module


Please contact Customer Care Center for Stockable and Non stockable status of references.

NORMAL STOCK ITEMS

W.E.F. January 15<sup>th</sup>, 2026

# Isobar Distribution System

## EcoStruxure™ Innovation At Every Level



70%  
of decision-makers  
see the business  
value of IoT\*

\*Schneider Electric IoT 2020  
Business Report

From sensors to services, our Innovation At Every Level approach improves energy and operational efficiency by tapping the true business value of IoT advancements. We've made mobility, sensing, cloud, analytics, and cyber security technologies meaningful to customers, helping them compete in our IoT economy.

### Connected Products:


The Internet of Things starts with the best things. Our IoT-enabled best-in-class connected products include breakers, drives, UPSs, relays, sensors, and more. Devices with embedded intelligence drive better decision-making throughout operations.

### Edge Control:

Mission-critical scenarios can be unpredictable, so control of devices at the edge of the IoT network is a must. This essential capability provides real-time solutions that enable local control at the edge, protecting safety and uptime.

### Applications, Analytics, and Services:

Interoperability is imperative to supporting the diverse hardware and systems in building, data center, industry, and Infrastructure end markets. EcoStruxure™ enables a breadth of agnostic applications, analytics, and services for seamless enterprise integration.

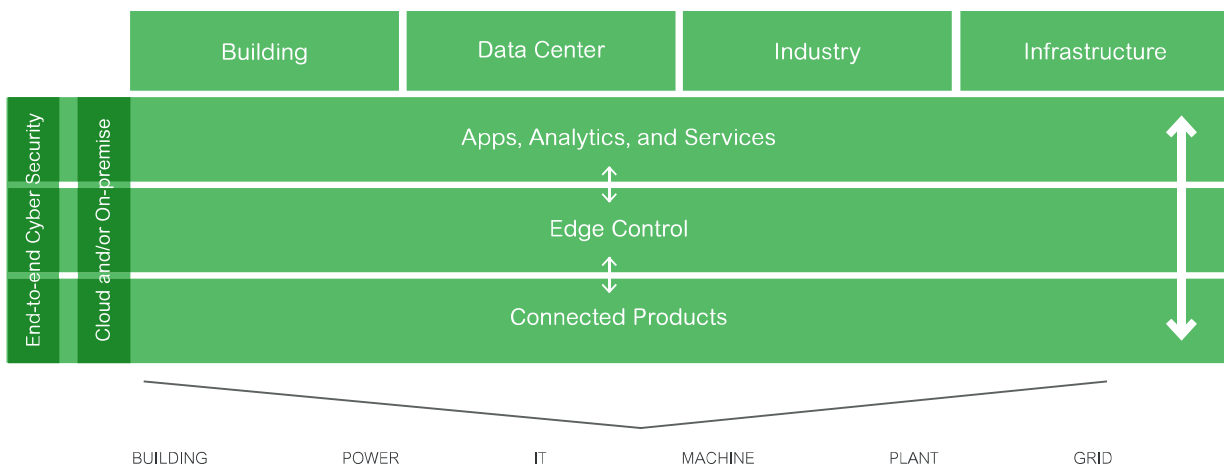

# Connectivity built in

Acti9 Isobar harnesses the connectivity of the Acti9 range enabling distribution boards to become smart and connected.



1. Enable asset management on all outgoing ways with **PowerTag**



2. **Smartlink SiD** for wireless data concentration



3. Enable further asset and energy management through PowerTag for Compact NSX



4. Monitor and control your assets with SiB Smartlink




5. See the power and optimise the use of your assets with Facility Expert our simple on-line services platform



# Acti 9

## Isobar Pan Assembly

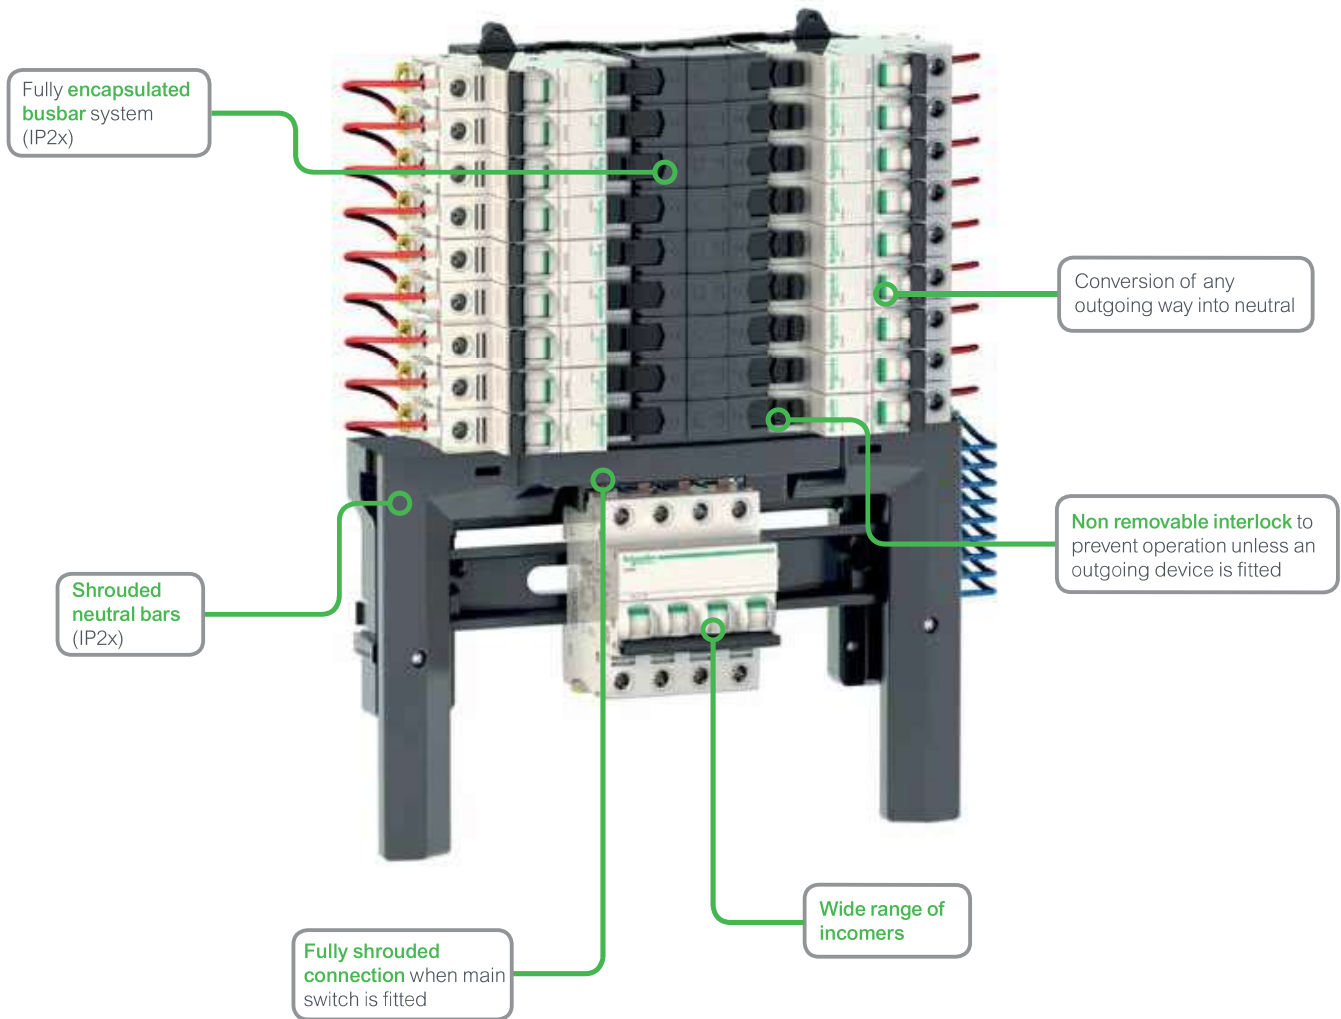

- Fully type tested conditional short circuit rating of 25kA to BS EN 61439-3
- 250A busbar rating
- Range of incomers: switch disconnectors, residual current devices, terminal blocks, MCCB
- Full range of device accessories and auxiliaries
- Shrouded Neutral
- Isobar disconnection conforms to BS/EN 60947-3 ensuring complete isolation for unused poles Option to switch any outgoing to neutral using distributed neutral kit

Description	Double Door Metal (IP43) Reference	Unit LP [₹]
Acti9 Isobar B - pan assembly - 16 ways TP + earth + neutral	SEA9BN16PEV	On Request
Acti9 Isobar B - pan assembly - 18 ways TP + earth + neutral	SEA9BN18PEV	On Request
Acti9 Isobar B - pan assembly - 24 ways TP + earth + neutral	SEA9BN24PEV	On Request
Acti 9 - 1P blank terminal block (no electrical connection)	SEA9BP	On Request
Isobar B - neutral bar - 1N - for distribution board - 16 ways	SEA9NB16	On Request
Isobar B - neutral bar - 1N - for distribution board - 18 ways	SEA9NB18	On Request
Isobar B - neutral bar - 1N - for distribution board - 24 ways	SEA9NB24	On Request
Isobar A - neutral bar - 1N - for distribution board - 4 ways SP+N	SEA9NKIT	On Request
Acti 9 - terminal block - 250A	SEA9NPB250TB	On Request
Acti 9 Isobar B - MCCB/Interpact connection kit	SEA9BINCKIT	On Request

\*Price on Request

Please contact Schneider Electric Customer Care Center for Prices

# Acti 9

## Distribution Boards

### Spectacular Design

*Blends seamlessly with interiors*



Unique Rounded Corners | Color - RAL 9003 white | Designer Rotary Knob

### Maximized Wiring Space

*Convenient and Safe wiring*




Side mounted N-bar and E-bar

Removed all injurious sharp corners

15% more wiring area | Reduced U-box Collar | Removable Frame, Centre plate & Gland plate

### Adaptable

*Total Flexibility for ease of installation and usage*

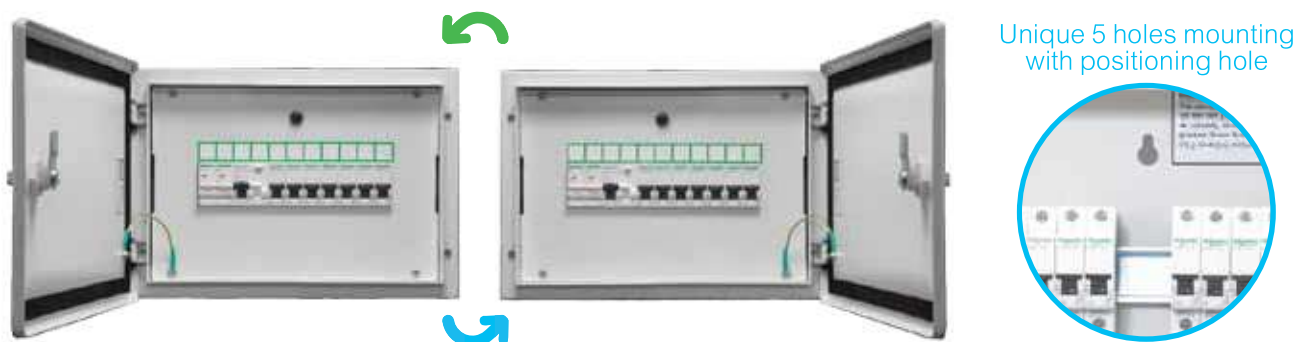

Unique 5 holes mounting with positioning hole

Surface and Flush installation | Field fittable key lock provision | Reversible Door

## Robust Architecture


*Perfect blend of Strength & Weight*



High Strength-to-Weight ratio | RoHS and REACH Compliance – ideal solution for GREEN Buildings

Base Material used - Galvanized Iron

## 4X Rust Resistance



1. Powder Coating
- 2. Galvanized Iron**
3. Base Iron

**Galvanized Iron** | Gives 4X rust resistance  
**No Rusting** | Even if the powder coating is scratched  
**No Propagation Of Rust** | Even If base material is chipped off  
**No Hassle** | of repainting due to rusting

Technically Proven

Safety Guaranteed



Designed and Manufactured as per **IS 8623 - 1 & 3** | IP and IK test by ERDA & CPRI | Glow wire tested

Type Tested as per IEC 61439 - 1 & 3



IEC 61439 - 3\* Fully Compliant

\*Tested at **NABL** and **ASTA** accredited testing facility



Salt Spray




IP43



IK09



Reliable Door



Earthing





Temp@  
Max Curr

Mechanical Tests

Electrical Tests

# Acti 9

## Distribution Boards

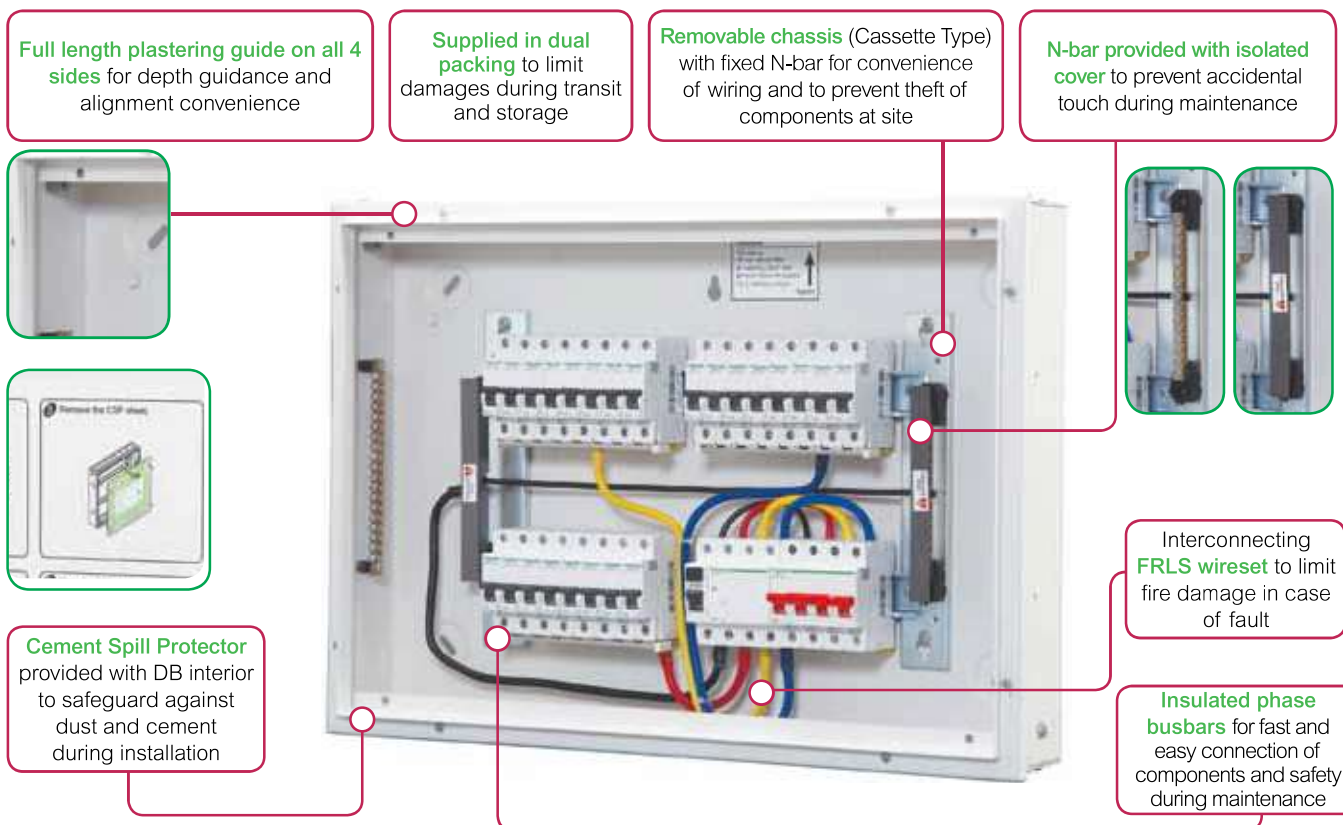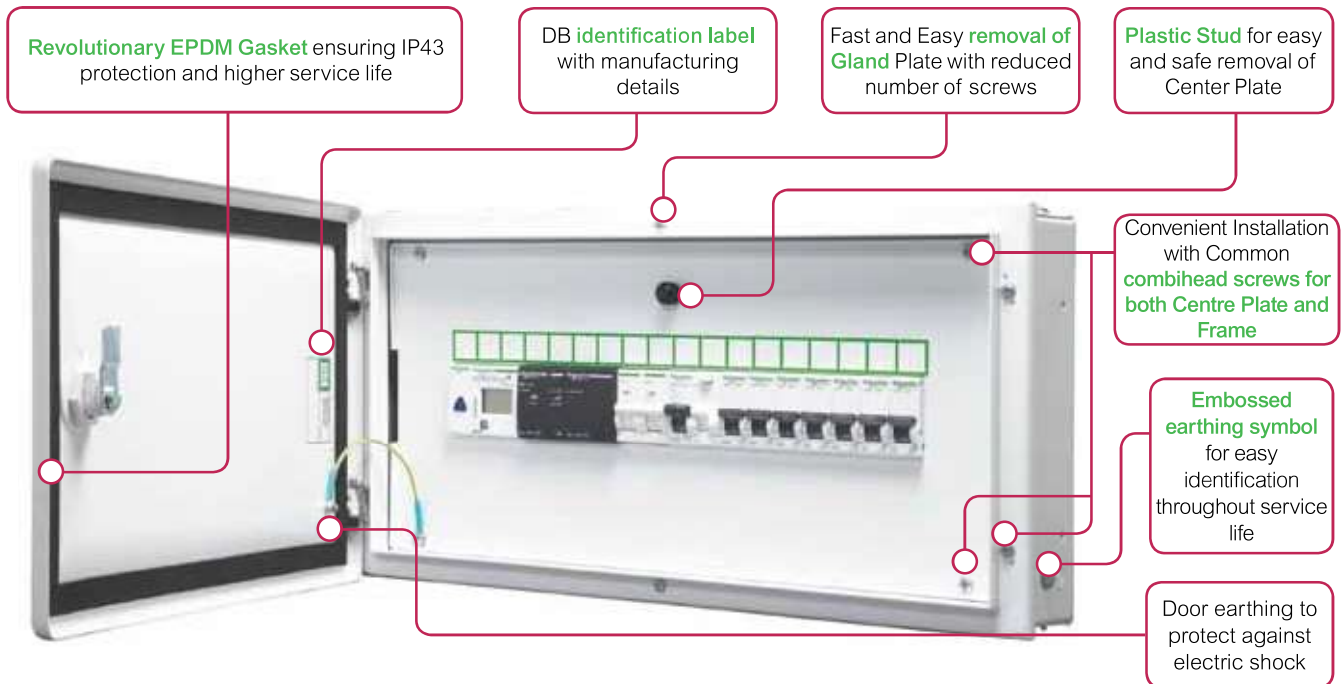

### Metal Enclosures



- Metal Enclosure to mount individual Modular Device feeding directly to the load or final distribution board

Description	Total Module Cutout	Single Door (IP30) Reference	Unit MRP [₹]
2 way	1 / 2	A9HMES02 <input checked="" type="checkbox"/>	1152
4 way	3 / 4	A9HMES04 <input checked="" type="checkbox"/>	1152

### SPN DBs



- SPN DB for distribution of Single Phase Neutral supply to respective load MCBs
- Incomer - DP RCCB/RCBO/Isolator/MCB
- Outgoing - SP MCBs

Description	Total Module Cutout (Incomer + Outgoing)	Single Door (IP30) Reference	Unit MRP [₹]	Double Door Metal (IP43) Reference	Unit MRP [₹]
6 way	6	A9HSNS06	2231	A9HSND06 <input checked="" type="checkbox"/>	3205
8 way	8	A9HSNS08 <input checked="" type="checkbox"/>	2646	A9HSND08 <input checked="" type="checkbox"/>	3493
12 way	12	A9HSNS12	3131	A9HSND12 <input checked="" type="checkbox"/>	4201
18 way	18	-	-	A9HSND18 <input checked="" type="checkbox"/>	5628

### TPN DBs



- Standard TPN DBs for distribution of Three Phase and Neutral supply
- Incomer - FP RCCB/RCBO/Isolator/MCB
- Outgoing - SP MCBs

Description	Total Module Cutout (Incomer + Outgoing)	Single Door (IP30) Reference	Unit MRP [₹]	Double Door Metal (IP43) Reference	Unit MRP [₹]
4 way eco	4 + 12	-	-	A9HTND04E <input checked="" type="checkbox"/>	8362
4 way	8 + 12	-	-	A9HTND04 <input checked="" type="checkbox"/>	8434
6 way	8 + 18	-	-	A9HTND06 <input checked="" type="checkbox"/>	8560
8 way	8 + 24	-	-	A9HTND08 <input checked="" type="checkbox"/>	10555
12 way	8 + 36	-	-	A9HTND12 <input checked="" type="checkbox"/>	16114

### Flexi Tier DBs



- Flexi DBs give total flexibility to mount any type and size of Modular devices as per load requirement
- Provided with N-Bar and E-Bar
- Flexi Tier DBs can be converted to PPI DB using 'PPI Kit' provided on next page

Description	Total Module Cutout (Incomer + Outgoing)	Single Door (IP30) Reference	Unit MRP [₹]	Double Door Metal (IP43) Reference	Unit MRP [₹]
2 Tier 24 Modules	2 x 12	-	-	A9HFD224	9038
3 Tier 36 Modules	3 x 12	-	-	A9HFD336	10855
4 Tier 40 Modules	4 x 10	-	-	A9HFD440 <input checked="" type="checkbox"/>	11468
4 Tier 56 Modules	4 x 14	-	-	A9HFD456 <input checked="" type="checkbox"/>	11986

#### Note:

For all above Reference MOQ = 1

Please contact Customer Care Center for Stockable and Non stockable status of references.


NORMAL STOCK ITEMS

W.E.F. January 15<sup>th</sup>, 2026

# Acti 9

## Distribution Boards

### New Phase Segregated DBs

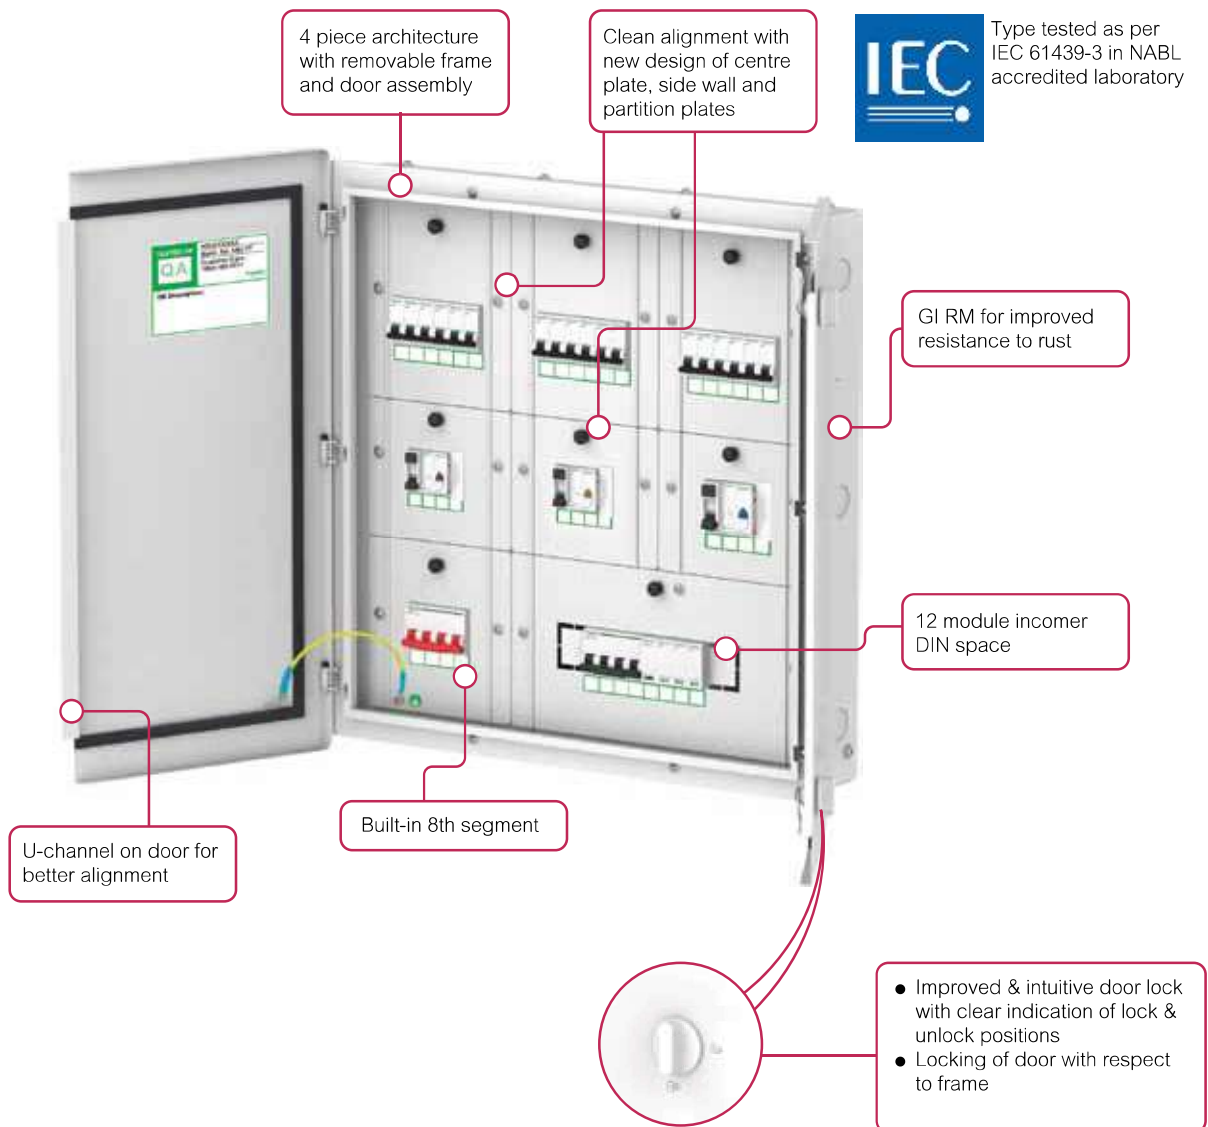

### Key highlights

- 1 New compact design
- 2 Robust architecture
- 3 Type-tested system
- 4 4 piece construction
- 5 Built-in 8th segment
- 6 Split door for all variants
- 7 Clean alignment of doors, centerplates
- 8 Improved door locking
- 9 High rust resistance with GI
- 10 Increased incomer DIN space

### Per Phase Isolation DBs

- PPI DBs to mount DP Residual Current Device (RCD) at an individual phase level to isolate the faulty phase in case of earth leakage and ensure continuity of supply to other healthy phases
- Incomer - Modular (FP MCB/Isolator) MCCB100A (TP/FP Compact NSX or EasyPact CVS)
- Sub-Incomer - DP RCCB/RCBO
- Outgoing - SP MCBs

### PPI TPN DB



Description	Total Module Cutout (no. of rows x No. of modules per row)	Double Door Metal (IP43)	No of Ways	Unit MRP [₹]
6 Way TPN PPI DB	8 + 2 x 3 + 4 x 3	A9HTPI06	6 Ways	11132
8 Way TPN PPI DB	8 + 2 x 3 + 6 x 3	A9HTPI08	8 Ways	12912
12 Way TPN PPI DB	8 + 2 x 3 + 10 x 3	A9HTPI12	12 Ways	17764

### PPI Flexi Tier DB

Description	Total Module Cutout (no. of rows x No. of modules per row)	Double Door Metal (IP43)	No of Ways	Unit MRP [₹]
4T40M Flexi PPI DB	4 x 10	A9HFP110	10	17238
4T56M Flexi PPI DB	4 x 14	A9HFP114	14	19409

### Phase Segregated DBs



- Phase Segregated DBs to provide total safety for installer and maintenance personnel, by compartmentalizing each Phase and separating Incomer, Sub-Incomer and Outgoing
- Offers better continuity of supply in case of faults during maintenance at DB level.
- Incomer - Modular (FP MCB/Isolator) / MCCB 100A (TP/FP during maintenance Compact NSX or EasyPact CVS)
- Sub-Incomer - DP RCCB/RCBO
- Outgoing - SP MCBs
- GI sheet ensures improved rust resistance
- Type-tested system conforming IEC 61439-3
- Built-in 8th segment (for modular incomer only)
- Increased incomer DIN space of 12M for 6 ways to 12 ways
- Split door for all variants
- New design ensures clean alignment of doors, centerplates
- 4 piece architecture with removable frame
- Improved, intuitive door lock design with clear indication of lock and unlock positions

Description	Total Module Cutout (Additional segment + Incomer + Sub-incomer + Outgoing)	Double Door Metal (IP43) Reference	Unit MRP [₹]
4 way	4 + 8 + (3*4) + (3*4)	A9HPSG04	16789
6 way	4 + 12 + (3*4) + (3*6)	A9HPSG06	18772
8 way	4 + 12 + (3*4) + (3*8)	A9HPSG08	20961
12 way	4 + 12 + (3*4) + (3*12)	A9HPSG12	26312
12 way with MCCB I/c	0 + 100A MCCB + (3*4) + (3*12)	A9HPSG12M	35505

**Note:**

For all above Reference MOQ = 1  
Please contact Customer Care Center for Stockable and Non stockable status of references.

### VTPN DBs for Modular Incomer



- Ideal solution to distribute power supply to both 3 Phase and 1 Phase loads in the same DB
- Incomer - FP RCCB / RCBO / Isolator / MCB
- Outgoing - SP MCBs / TP MCBs
- 65% more Incomer Wiring Space.
- New Compact Fishbone with better Thermal Performance
- Short Circuit Withstand – 17 kA for 250mS (100 A)/ 25 kA (250 A) for 500mS
- Secure Connections with Fixed Spreader links
- IP 2X protection at Incomer with new shrouds
- Type tested as per IEC 61439 – 3 in NABL accredited Lab
- Knockout size for Incomer increased to 50mm (to accommodate Aluminium Cable)

Description	Total Module Cutout (Incomer + Outgoing)	Double Door Metal (IP43) Reference	No of Ways	Unit MRP [₹]
Acti9 VTPN DB 4 Ways Modular i-c 63A	12 + 12	A9HVM04	4 Ways	16336
Acti9 VTPN DB 8 Ways Modular i-c 63A	12 + 24	A9HVM08	8 Ways	20789
Acti9 VTPN DB 12 Ways Modular i-c 63A	12 + 36	A9HVM12	12 Ways	27811

### VTPN DBs for MCCB Incomer



- DBs for higher incoming current distribution up to 250A
- Incomer - TP/FP Compact NSX or EasyPact CVS MCCB up to 250A
- Outgoing - SP MCBs / TP MCBs
- 65% more Incomer Wiring Space.
- New Compact Fishbone with better Thermal Performance
- Short Circuit Withstand – 17 kA for 250mS (100 A)/ 25 kA (250 A) for 500mS
- Secure Connections with Fixed Spreader links
- IP 2X protection at Incomer with new shrouds
- Type tested as per IEC 61439 – 3 in NABL accredited Lab
- Knockout size for Incomer increased to 50mm (to accommodate Aluminium Cable)

Description	Total Module Cutout (Incomer + Outgoing)	Double Door Metal (IP43) Reference	No of Ways	Unit MRP [₹]
Acti9 VTPN DB 4 Ways MCCB i-c 100A	100 A MCCB + 12	A9HVN04L	4 Ways	17889
Acti9 VTPN DB 4 Ways MCCB i-c 160A	160 A MCCB + 12	A9HVN04M	4 Ways	19695
Acti9 VTPN DB 8 Ways MCCB i-c 100A	100 A MCCB + 24	A9HVN08L	8 Ways	22673
Acti9 VTPN DB 8 Ways MCCB i-c 160A	160 A MCCB + 24	A9HVN08M	8 Ways	24535
Acti9 VTPN DB 8 Ways MCCB i-c 250A	250 A MCCB + 24	A9HVN08H	8 Ways	31453
Acti9 VTPN DB 12 Ways MCCB i-c 100A	100 A MCCB + 36	A9HVN12L	12 Ways	30140
Acti9 VTPN DB 12 Ways MCCB i-c 160A	160 A MCCB + 36	A9HVN12M	12 Ways	32742
Acti9 VTPN DB 12 Ways MCCB i-c 250A	250 A MCCB + 36	A9HVN12H	12 Ways	37207

## Mivan Compatible DB

### SPN DBs

Description	Total Module Cutout (Incomer + Outgoing)	Double Door Metal (IP43) Reference	No of Ways	Unit MRP [₹]
Acti9 DB 6 way SPN DD 1.6mm	2 + 4	A9HSND06Z	6 Ways	On Request
Acti9 DB 8 way SPN DD 1.6mm	2 + 6	A9HSND08Z	8 Ways	On Request
Acti9 DB 12 way SPN DD 1.6mm	2 + 10	A9HSND12Z	12 Ways	On Request
Acti9 DB 18 way SPN DD 1.6mm	2 + 16	A9HSND18Z	18 Ways	On Request

### TPN DBs

Description	Total Module Cutout (Incomer + Outgoing)	Double Door Metal (IP43) Reference	No of Ways	Unit MRP [₹]
Acti9 DB 4 way TPN DD 1.6mm	8 + 4 x 3	A9HTND04Z	4 Ways	On Request
Acti9 DB 6 way TPN DD 1.6mm	8 + 6 x 3	A9HTND06Z	6 Ways	On Request
Acti9 DB 8 way TPN DD 1.6mm	8 + 8 x 3	A9HTND08Z	8 Ways	On Request
Acti9 DB 12 way TPN DD 1.6mm	8 + 12 x 3	A9HTND12Z	12 Ways	On Request

Please contact Customer Care Center for Stockable and Non stockable status of references.

NORMAL STOCK ITEMS

W.E.F. January 15<sup>th</sup>, 2026

**Phase Segregated DBs (Mivan Compatible)**

Description	Total Module Cutout (Additional segment + Incomer + Sub-incomer + Outgoing)	Double Door Metal (IP43) Reference	No of Ways	Unit MRP [₹]
Acti9 DB 4 way PSG DD 1.6mm	4 + 8 + (3*4) + (3*4)	A9HPSG04Z	4 ways	On Request
Acti9 DB 6 way PSG DD 1.6mm	4 + 12 + (3*4) + (3*6)	A9HPSG06Z	6 ways	On Request
Acti9 DB 8 way PSG DD 1.6mm	4 + 12 + (3*4) + (3*8)	A9HPSG08Z	8 ways	On Request
Acti9 DB 12 way PSG DD 1.6mm	4 + 12 + (3*4) + (3*12)	A9HPSG12Z	12 ways	On Request

**Flexi Tier DBs (Mivan Compatible)**

Description	Total Module Cutout (no. of rows x No. of modules per row)	Double Door Metal (IP43) Reference	No of Modules Per Row	Unit MRP [₹]
4 Tier 40 Modules	4 x 10	A9HFD440Z	10	On Request
4 Tier 56 Modules	4 x 14	A9HFD456Z	14	On Request

**TV TEL DB**

Description	Double Door Metal (IP30) Reference	Unit MRP [₹]
Acti9 DB TVTEL BOX 1mm IP30	A9HTVTEL	On Request
Acti9 DB TVTEL & ONT BOX 1.2MM IP30	A9HOTVTEL	On Request

**Note:** For all above Reference MOQ = 1

**Metal Clad P&S Units**

- Plug & Socket Unit with Electra Plug & Socket and provision to mount modular protection devices to feed the end load directly

Description	Total Module Cutout	Single Door (IP30) Reference	Unit MRP [₹]
10A 1P+N+E P&S	2	A9HMS210	2932
20A 1P+N+E P&S	2	A9HMS220	3137
30A 3P+E P&S	3	A9HMS330	6868

Please contact Customer Care Center for Stockable and Non stockable status of references.

NORMAL STOCK ITEMS

W.E.F. January 15<sup>th</sup>, 2026

### Industrial P&S Units (provision to mount PratiKa Sockets)



- Plug & Socket Unit with provision to mount PratiKa straight / angled\* socket and modular protection devices to feed the end load directly

Description	Total Module Cutout	Single Door (IP30) Reference	Unit MRP [₹]
16A 3P PK P&S	2	A9HKS316	2711
32A 3P PK P&S	2	A9HKS332	4478
32A 5P PK P&S	4	A9HKS532	5303
63A 5P PK P&S	4	A9HKS563	10708

### Locks for Acti 9 DBs

Key Lock\*



Lock & Unlock symbol on door for easy & intuitive operation

Description	Reference	Unit MRP [₹]
New Rotary Lock**	A9HRL901	873
New Key Lock**	A9HRL902	813

**Note:** \*\*Use New Rotary lock reference A9HRL901 for:  
Acti9 DBs manufactured September 2020 onwards  
Acti9 DBs with lock & unlock symbol on door.

## Accessories for Distribution Boards

## Wire Way Box for Double Door IP43 DBs

Description	Reference	Unit MRP [₹]
Wire way box for A9HSND06	A9HSND06WB	2158
Wire way box for A9HSND08	A9HSND08WB	2608
Wire way box for A9HSND12	A9HSND12WB	2908
Wire way box for A9HSND18	A9HSND18WB	4153
Wire way BOX FOR A9HTND04E	A9HTND04EWB	2997
Wire way box for A9HTND04	A9HTND04WB	3314
Wire way box for A9HTND06	A9HTND06WB	3514
Wire way box for A9HTND08	A9HTND08WB	4153
Wire way box for A9HTND12	A9HTND12WB	4851
Wire way BOX FOR A9HFD224	A9HFD224WB	3090
Wire way BOX FOR A9HFD336	A9HFD336WB	3059
Wire way BOX FOR A9HFD440	A9HFD440WB	2957
Wire way BOX FOR A9HFD456	A9HFD456WB	3314
WWB Acti9 PSG DB 8 Seg 4 Ways MCB i/c	A9HPSG04WWB	4275
WWB Acti9 PSG DB 8 Seg 6 Ways MCB i/c	A9HPSG06WWB	5002
WWB Acti9 PSG DB 8 Seg 8 Ways MCB i/c	A9HPSG08WWB	5596
WWB Acti9 PSG DB 8 Seg 12 Ways MCB i/c	A9HPSG12WWB	7253
WWB Acti9 PSG DB 7 Seg 12 Ways MCCB i/c	A9HPSG12MWWB	7747
WWB for Std VTPN DB MCB i/c	A9HVMXXWB	3144
WWB for Std VTPN DB MCCB i/c	A9HVNXXWB	3347

## Modular Distribution Boards - Metallic

Description	Reference	Unit MRP [₹]
<b>Busbars</b>		
Fork Busbar 1P 12MOD. 63A	R9XFH112	1225
Fork Busbar 1P 57MOD. 63A	R9XFH157	2727
Fork Busbar 2P 12MOD. 63A	R9XFH212	1412
Fork Busbar 2P 57MOD. 63A	R9XFH257	5230
Fork Busbar 3P 12MOD. 63A	R9XFH312	3187
Fork Busbar 3P 57MOD. 63A	R9XFH357	11407
Fork Busbar 4P 12MOD. 63A	R9XFH412	2939
Fork Busbar 4P 57MOD. 63A	R9XFH457	12276
<b>Busbar Accessories</b>		
Set of 10 End Caps 1P	R9XE110	*
Set of 10 End Caps 2P	R9XE210	*
Set of 10 End Caps 3P	R9XE310	*
Set of 10 End Caps 4P	R9XE410	*
Set of 20 Tooth Caps	R9XT20	*
Blanking Plate	13229B	62

**Note:** Blanking Plate MOQ = 10, All other MOQ = 1

## Customized Distribution Boards to Suit Your Need - Available on Request\*

- TV/Telephone DBs
- Pre-Wired DBs
- 8 Segment DBs
- Acrylic Door DBs
- IP54 DBs
- DBs with Phase Indication Lamps

\*upto 32A socket only

\*Please contact nearest Schneider Electric Sales Office or Customer Care Center for coordination chart

Please contact Customer Care Center for Stockable and Non stockable status of references.

NORMAL STOCK ITEMS

W.E.F. January 15<sup>th</sup>, 2026

# Timers & Time Switches

## Analog Time Switches



- 24H, 7D Programmable switch Voltage Rating: 230V AC +10%, -15%
- Memory: Upto 56 Switching Operations
- Back up of program: Operating reserve for 100, 200 Hours
- Overall dimensions: 5 modules
- Minimum time between two switching operations: 15, 30 min
- Accuracy:  $\leq \pm 1$  s/day at +20°C

Description	Module Width 18mm/module	Reference	Unit MRP [₹]
IH 24H 16 A 15 mts interval 1 channel	1	15336	6338
IH 24H 16 A 30 mts interval 1 channel	1	CCT15365	6913
IH 7 day 16 A 1 channel- Max 21 On and 21 Off cycles	3	CCT15367	9896
IH 24H 16 A 30 mts 1 channel without reserve	3	CCT16364	5615

## Digital Time Switches



- 7D, 24H Programmable switch .Voltage Rating: 230V AC +10%, -15%
- Consumption: 1 channel - max. 4VA; 2 channels - max. 7VA
- Memory: Upto 56 Switching Operations
- Back up of program & time by lithium battery: Operating reserve: 6 Years
- Overall dimensions: 5 modules
- Cable length: 100m
- Minimum time between two switching operations: 1 min

Description	Module Width 18mm/module	Reference	Unit MRP [₹]
IHP 1C w (24h/7d) programmable time switch	2.5	CCT15441	13622
IHP+ 1C (24h/7d) SMARTw programmable time switch	2.5	CCT15551	16805
IHP 2C w (24h/7d) programmable time switch	2.5	CCT15443	17572
IHP DCF (24h/7d) SMART programmable time switch	2.5	CCT15858	27662
IHP+ 2C (24h/7d) SMARTw programmable time switch	2.5	CCT15553	19441

## Timers



- Switching capacity 16 A, max
- Delay range from 30 sec to 20 min
- Capacity for lighted pushbutton 150 mA
- Electric distribution busbar compatibility
- Output power capacity CCT15232-2300W
- Output power capacity CCT15223-3600W

Description	Module Width 18mm/module	Reference	Unit MRP [₹]
MINs - electronic timer - 0.5 to 20 min	1	CCT15232	7695
MINs - electronic timer - 0.5 to 20 min with switch Off Warning	1	CCT15233	9881
MINs - electronic timer - 0.5 to 20 min with switch Off Warning and Impulse relay function	1	CCT15234	9288

Please contact Customer Care Center for Stockable and Non stockable status of references.

W.E.F. January 15<sup>th</sup>, 2026

# Timers & Time Switches

## Twilight switch



- Includes wall mounted cell
- Adjustable brightness threshold 2 to 2000 Lux
- 2 LEDs to signal the sensor status and the output status
- Test button: To check the product and load cabling
- Switching capacity: 16Amp
- Screwless Terminals compatible with rigid and flexible wires
- Consumption 6 VA
- Size 45mm

Description	Module Width 18mm/module	Reference	Unit MRP [₹]
IC2000 outdoor (2 - 2000 lux) twilight switch	1	CCT15369	16229
Analogue indoor light sensor cell	-	CCT15262	8008
Wall mounted Analogue outdoor light sensor cell	-	CCT15263	12413
IC100 (2 - 100 lux) twilight switch	1	CCT15482	13652
IC2000 indoor (2 - 2000 lux) twilight switch	1	CCT15285	12167
IC2000p+ (2 - 2000 lux) programmable twilight switch	2.5	CCT15483	28199
IC100kp+ 1C (1 - 99000 lux) SMART programmable twilight switch	2.5	CCT15494	34106
IC100kp+ 2C (1 - 99000 lux) SMART programmable twilight switch	2.5	CCT15495	41987
IC Astro 2C SMART programmable twilight switch	2.5	CCT15245	29476
IC Astro 1C SMART programmable twilight switch	2.5	CCT15225	24803

## Time switch accessories

Description	Module Width 18mm/module	Reference	Unit MRP [₹]
Programming kit for IHP / IC	1	CCT15860	12974

## Thermostat

Description	Module Width 18mm/module	Reference	Unit MRP [₹]
THP1+ 1C (24h/7d) programmable thermostat	2.5	CCT15834	29513

Please contact Customer Care Center for Stockable and Non stockable status of references.

W.E.F. January 15<sup>th</sup>, 2026

Kaedra enclosures for PratiKa industrial sockets are part of a complete system of Watertight enclosures from 16A to 125A providing solutions for protection, control and electrical distribution for tertiary and industrial applications



- Degree of protection - IP65
- Impact strength - IK09
- Resistant to chemical and atmospheric agents, UVs etc.
- Self extinguishing class 2 insulating material
- Flame and abnormal heat resistance: 650°C
- Reversible front face for opening of door to left/right
- Combining of enclosures horizontally/vertically while still maintaining IP
- DIN channel can be positioned in 2 depths & 2 heights for cabling purpose

## Mini Enclosures for modular devices



Description	Reference	Unit MRP [₹]
4 module	13441 <input checked="" type="checkbox"/>	4658
6 module	13442	5301
8 module	13443	6242
12 module	13444	10030

## Enclosures for modular devices (with terminal blocks)



Description	Reference	Unit MRP [₹]
1 row 12 module	13431	11069
1 row 18 module	13432	14589
2 row 24 module	13433	16567
2 row 36 module	13434	20973
3 row 36 module	13435	21869
4 row 72 module	13437	41739

## Mini Enclosure (suitable to mount modular devices and PratiKa 16A socket)



Description	Reference	Unit MRP [₹]
4 module 1 vertical opening	13175 <input checked="" type="checkbox"/>	2222
4 module 2 horizontal opening	13176	2741
4 module 3 horizontal opening	13177	3450

**Note:** For all above Reference MOQ = 1

Please contact Customer Care Center for Stockable and Non stockable status of references.

NORMAL STOCK ITEMS

W.E.F. January 15<sup>th</sup>, 2026

Enclosure (suitable to mount modular devices and PratiKa 16A / 32A sockets)



Description	Reference	Unit MRP [₹]
5 module 2 opening	13178 <input checked="" type="checkbox"/>	5348
8 module 4 horizontal opening	13179	7300
13 module 3 opening	13180	9646
13 module 6 opening	13181	10604
19 module 8 opening	13182	13665

## Functional Plaques



Description	Reference	Unit MRP [₹]
Blank - marked for 1 socket 50x50	13135	692
Blank - marked for 1 socket 65x65 or 75x75	13137	692
Intermediate with 65x85 opening	13136	843
Intermediate with one opening for 65x85 & 90x100	13142	1399

**Note:** For all above Reference MOQ = 1

Please contact Customer Care Center for Stockable and Non stockable status of references.

NORMAL STOCK ITEMS

W.E.F. January 15<sup>th</sup>, 2026

Wander Plugs



- Conforms to IEC 60309-1 & IEC 60309-2
- PK PratiKa Screw Connect: same orientation of clamp's screws
- External impact strength: IK08
- Glow wire test: 850°C

[In] Rated Current (A)	[Ue] Rated Operational Voltage (V)	Poles Description	Reference	Unit MRP [₹]
<b>PratiKa Screw</b>				
<b>IP44</b>				
16	200...250	2P + E	PKE16M423 <input checked="" type="checkbox"/>	678
		2P + E	<b>PKX16M423</b> <input type="checkbox"/>	1383
	380...415	3P + E	PKE16M434 <input checked="" type="checkbox"/>	866
		3P + N + E	PKE16M435 <input checked="" type="checkbox"/>	903
32	200...250	2P + E	PKE32M423 <input checked="" type="checkbox"/>	1066
	380...415	3P + E	PKE32M434 <input checked="" type="checkbox"/>	1250
		3P + N + E	PKE32M435 <input checked="" type="checkbox"/>	1221
<b>IP67</b>				
16	200...250	2P + E	PKE16M723 <input checked="" type="checkbox"/>	1481
		2P + E	<b>PKX16M723</b> <input type="checkbox"/>	2201
	380...415	3P + E	PKE16M734 <input checked="" type="checkbox"/>	1689
		3P + N + E	PKE16M735 <input checked="" type="checkbox"/>	1805
32	200...250	2P + E	PKE32M723 <input checked="" type="checkbox"/>	2116
	380...415	3P + E	PKE32M734 <input checked="" type="checkbox"/>	2282
		3P + N + E	PKE32M735 <input checked="" type="checkbox"/>	2278
<b>PK (63A &amp; 125A available in IP67 only)</b>				
63	200...250	2P + E	81378	5998
	380...415	3P + E	81382 <input checked="" type="checkbox"/>	5717
		3P + N + E	81383 <input checked="" type="checkbox"/>	5672
125	380...415	3P + E	<b>81394</b>	17491
		3P + N + E	81395	17491

Note: \* Fast Connection

Small Wall Mounted Sockets



- Conforms to IEC 60309-1 & IEC 60309-2
- External impact strength: IK08
- Glow wire test: 850°C

[In] Rated Current (A)	[Ue] Rated Operational Voltage (V)	Poles Description	Reference	Unit MRP [₹]
<b>IP44</b>				
16	200...250	2P + E	PKF16W423	1198
	380...415	3P + E	PKF16W434	1390
		3P + N + E	PKF16W435	1518
32	200...250	2P + E	PKF32W423	1566
	380...415	3P + E	<b>PKF32W434</b>	1879
		3P + N + E	PKF32W435	1985
<b>IP67</b>				
16	200...250	2P + E	<b>PKF16W723</b>	1903
	380...415	3P + E	<b>PKF16W734</b>	2391
		3P + N + E	<b>PKF16W735</b>	2472
32	200...250	2P + E	PKF32W723	2382
	380...415	3P + E	<b>PKF32W734</b>	3478
		3P + N + E	<b>PKF32W735</b>	4613

Note: For all above Reference MOQ = 1

Please contact Customer Care Center for Stockable and Non stockable status of references.  
\*Bold references are MTO reference.

## Wall Mounted Sockets



- Conforms to IEC 60309-1 & IEC 60309-2
- Rated operational voltage upto 415V
- Rated operational current upto 125A
- External impact strength: IK08
- Glow wire test: 850°C
- Available only in IP67

[In] Rated Current (A)	[Ue] Rated Operational Voltage (V)	Poles Description	Reference	Unit MRP [₹]
63	200...250	2P + E	<b>81178</b>	7388
		3P + E	<b>81182</b> ●	8139
	380...415	3P + N + E	81183	7714
125	380...415	3P + E	<b>81194</b>	26647
		3P + N + E	<b>81195</b>	26777

## Wander Sockets



- PK PratiKa Screw Connect: same orientation of clamp's screws.
- PK PratiKa: 16A & 32A; IP44 & IP67
- External impact strength: IK08
- Glow wire test: 850 °C
- Conforms to IEC 60309-1 & IEC 60309-2

[In] Rated Current (A)	[Ue] Rated Operational Voltage (V)	Poles Description	Reference	Unit MRP [₹]
<b>PratiKa Screw</b>				
<b>IP44</b>				
16	200...250	2P + E	PKF16M423 ✓	948
		2P + E	<b>PKY16M423</b>	1044
	380...415	3P + E	PKF16M434	1093
		3P + N + E	PKF16M435	1193
32	200...250	2P + E	PKF32M423 ✓	1303
		3P + E	<b>PKF32M434</b>	1582
	380...415	3P + N + E	PKF32M435 ✓	1592
<b>IP67</b>				
16	200...250	2P + E	PKF16M723	1755
		2P + E	<b>PKY16M723</b> ●	2135
	380...415	3P + E	<b>PKF16M734</b>	2201
		3P + N + E	PKF16M735	2299
32	380...415	2P + E	PKF32M723	2413
		3P + E	<b>PKF32M734</b>	2670
	3P + N + E	PKF32M735	2695	
<b>PK (63A &amp; 125A available in IP67 only)</b>				
63	200...250	2P + E	81478	6533
		3P + E	<b>81482</b>	6590
	380...415	3P + N + E	81483	6633
125	380...415	3P + E	<b>81494</b>	20622
		3P + N + E	81495	21026

## Also Available on Request:

- Patented FAST connect Plugs & Sockets - innovative cabling system that enables connection without stripping the conductor and with absolutely no screws required
- Extra Low Voltage Plugs & Sockets down to 50V

Please contact nearest Schneider Electric Sales Office or Customer Care for Reference and Prices

**Note:** For all above Reference MOQ = 1

Please contact Customer Care Center for Stockable and Non stockable status of references.

\*Bold references are MTO reference.

## Panel Mounted Sockets - Angled



PKF16F423



PKF32F723



81283

- PK PratiKa Screw Connect: same orientation of clamp's screws
- External impact strength: IK08
- Glow wire test: 850°C
- Conforms to IEC 60309-1 & IEC309-2

[In] Rated Current (A)	[Ue] Rated Operational Voltage (V)	Poles Description	Reference	Unit MRP [₹]
<b>PratiKa Screw</b>				
<b>IP44</b>				
16	200...250	2P + E	PKF16F423 <input checked="" type="checkbox"/>	777
		2P + E	<b>PKY16F423</b> ●	791
	380...415	3P + E	PKF16F434	1093
		3P + N + E	PKF16F435 <input checked="" type="checkbox"/>	1166
32	200...250	2P + E	PKF32F423 <input checked="" type="checkbox"/>	1290
	380...415	3P + E	PKF32F434	1512
		3P + N + E	PKF32F435	1491
<b>IP67</b>				
16	200...250	2P + E	PKF16F723 <input checked="" type="checkbox"/>	1368
	380...415	2P + E	<b>PKY16F723</b> ●	1673
		3P + E	PKF16F734	1573
32	200...250	3P + N + E	PKF16F735 <input checked="" type="checkbox"/>	1592
	380...415	2P + E	PKF32F723	1798
		3P + E	PKF32F734	2101
		3P + N + E	PKF32F735	2115
<b>PK (63A &amp; 125A available in IP67 only)</b>				
63	200...250	2P + E	81278	5898
	380...415	3P + E	81282 <input checked="" type="checkbox"/>	5908
		3P + N + E	81283 <input checked="" type="checkbox"/>	5967
125	380...415	3P + E	<b>81294</b>	19899
		3P + N + E	81295	19805

## Panel Mounted Sockets - Straight



PKF16G423



PKF16G723



81683

- PK PratiKa Screw Connect: same orientation of clamp's screws
- External impact strength: IK08
- Glow wire test: 850°C
- Conforms to IEC 60309-1 & IEC309-2

[In] Rated Current (A)	[Ue] Rated Operational Voltage (V)	Poles Description	Reference	Unit MRP [₹]
<b>PratiKa Screw</b>				
<b>IP44</b>				
16	200...250	2P + E	PKF16G423	831
		2P + E	<b>PKY16G423</b>	1231
	380...415	3P + E	PKF16G434	1448
		3P + N + E	PKF16G435	1250
32	200...250	2P + E	PKF32G423	1318
	380...415	3P + E	PKF32G434	1518
		3P + N + E	PKF32G435	1645
<b>IP67</b>				
16	200...250	2P + E	PKF16G723	1390
	380...415	2P + E	<b>PKY16G723</b> ●	1566
		3P + E	PKF16G734	1912
32	380...415	3P + N + E	PKF16G735	1592
		2P + E	PKF32G723	1773
	200...250	3P + E	PKF32G734	1994
		3P + N + E	PKF32G735	2069
<b>PK (63A &amp; 125A available in IP67 only)</b>				
63	380...415	3P + E	<b>81682</b>	5966
		3P + N + E	81683	5966
		3P + N + E	<b>81695</b>	19995

\*Fast Connection

**Note:** For all above Reference MOQ = 1

Please contact Customer Care Center for Stockable and Non stockable status of references.

\*Bold references are MTO reference.

## Sockets with Interlock Switches - for guaranteed safety of operation

- Allows closure of main switch only when the plug is fully inserted in socket - when complete mechanical & electrical connection has occurred
- Plug removal is possible only when the switch is in "off" position

## Wall Mounted Sockets with Interlock Switch Unika (w/o protection)



- Switch designed for use in AC 22A class applications
- Conforms to IEC 60309-1 & IEC 60309-2
- Rated operational voltage upto 415V
- Rated operational current upto 32A
- External impact strength: IK08
- Available in IP44 / IP65 versions
- Glow wire test: 750°C

[In] Rated Current (A)	[Ue] Rated Operational Voltage (V)	Poles Description	Reference	Unit MRP [₹]
<b>IP44</b>				
16	200...250	2P + E	83031	9970
	380...415	3P + N + E	<b>83036</b>	14072
32	200...250	2P + E	83042 <input checked="" type="checkbox"/>	12820
	380...415	3P + E	<b>83046</b>	20950
		3P + N + E	83047	15107
<b>IP65</b>				
16	200...250	2P + E	83081	10315
	380...415	3P + E	<b>83085</b>	14206
		3P + N + E	<b>83086</b>	14494
32	200...250	2P + E	<b>83092</b>	13519
	380...415	3P + N + E	83097	16232

## Socket with Interlock Switch &amp; DIN Rail Isoblock (4.5 modules)



- Switch designed for use in AC- 22A class applications
- Conforms to IEC 60309-1 & IEC 60309-2
- Provision to DIN mount 4.5 module device
- External impact strength: IK10
- Available in IP65 version
- Glow wire test: 850°C

[In] Rated Current (A)	[Ue] Rated Operational Voltage (V)	Poles Description	Reference	Unit MRP [₹]
16	200...250	2P + E	82754 <input checked="" type="checkbox"/>	12242
	380...415	3P + N + E	<b>82759</b>	18900
32	200...250	2P + E	83791 <input checked="" type="checkbox"/>	14494
	380...415	3P + E	83795	21043
		3P + N + E	83796	17267

## Socket with Interlock Switch &amp; DIN Rail Isoblock (6 modules)



- Switch designed for use in AC- 22A class applications
- Conforms to IEC 60309-1 & IEC 60309-2
- Provision to DIN mount 6 module device
- External impact strength: IK10
- Available in IP65 version
- Glow wire test: 850°C

[In] Rated Current (A)	[Ue] Rated Operational Voltage (V)	Poles Description	Reference	Unit MRP [₹]
32	200...250	2P + E	<b>82766</b>	19304
63	380...415	3P + E	<b>82782</b>	26011
		3P + N + E	82783	25845

Please contact Customer Care Center for Stockable and Non stockable status of references.

\*Bold references are MTO reference.

**ELECTRA Metal Clad Plugs & Sockets are specially designed incorporating the latest safety, quality and user friendly features.**

**Construction**

- The casting is made from non-corroding die-cast aluminum alloy combining exceptional compactness with high strength
- The design/construction eliminates the possibility of mismatch in fitting of plugs in corresponding sockets
- The floating contacts in the sockets are self aligning and facilitates smooth plugging in without undue pressure (These can be easily removed for wiring )
- A provision for pilot pin facilitates mechanical interlocking in case of 63A ratings

**Human Safety**

Specially designed shroud to avoid accidental finger contact with plug-pins while inserting/removing the plug  
Similarly, the contact tubes in sockets are deeply recessed to avoid human contact

- The earthing pins ensure that earth connection is made first and broken last, being longer than conducting pins
- The visible earth terminals facilitate easy checking of earth connection
- The cable grip to the plug is made very strong by providing a compression gland and by protecting it at the point of entry by a strong rubber guard

**Applications**

Industrial, Commercial & Domestic portable equipments like Hand/Power Tools, Industrial Ovens, Welding Sets, Mobile Generators, Furnaces, Ships, Office Machines, Refrigerators, Coolers, Air-Conditioners, Overhead Cranes, Chilling Cabinets, Tile Polishers and Sewing Machines

**Plug**



Rating (A)	Poles Description	Voltage (V)	MOQ	Reference	Unit MRP [₹]
10	2P	250	30	AP10 <input checked="" type="checkbox"/>	316
20	2P	250	30	AP20 <input checked="" type="checkbox"/>	333
20	3P	440	30	BP20 <input checked="" type="checkbox"/>	443
30	3P	440	20	BP30 <input checked="" type="checkbox"/>	806
63	3P+N+E	440	4	CP63 <input checked="" type="checkbox"/>	3644

**Socket**



Rating (A)	Poles Description	Voltage (V)	MOQ	Reference	Unit MRP [₹]
10	2P	250	30	AS10 <input checked="" type="checkbox"/>	333
20	2P	250	30	AS20 <input checked="" type="checkbox"/>	355
20	3P	440	30	BS20 <input checked="" type="checkbox"/>	497
30	3P	440	20	BS30 <input checked="" type="checkbox"/>	853
63	3P+N+E	440	4	CS63 <input checked="" type="checkbox"/>	4082

Please contact Customer Care Center for Stockable and Non stockable status of references.  
\*Bold references are MTO reference.

Complete range of switches & sockets suitable for both indoor & outdoor applications like Kitchens, Swimming Pools, Landscape Gardens, Exterior Walls and Other Environmentally Challenged Locations.



56SW116LE-GY



56SW216LE-GY



56SW332LE-GY

Description	IP Rating	Reference	Unit MRP [₹]
<b>Surface Switches</b>			
<b>Single Pole Switches Less Enclosure</b>			
1 Pole 250V 10A	IP66	<b>56SW110LE-GY</b>	4396
1 Pole 250V 16A	IP66	56SW116LE-GY	4079
1 Pole 250V 20A	IP66	56SW120LE-GY	6176
1 Pole 250V 32A	IP66	56SW132LE-GY	7365
<b>Double Pole Switches Less Enclosure</b>			
2 Pole 500V 16A	IP66	<b>56SW216LE-GY</b>	7115
2 Pole 500V 20A	IP66	<b>56SW220LE-GY</b>	7115
2 Pole 500V 32A	IP66	<b>56SW232LE-GY</b>	9442
2 Pole 500V 50A	IP66	<b>56SW250LE-GY</b>	11027
<b>Triple Pole Switches Less Enclosure</b>			
3 Pole 500V 10A	IP66	<b>56SW310LE-GY</b>	6581
3 Pole 500V 16A	IP66	56SW316LE-GY	6865
3 Pole 500V 20A	IP66	56SW320LE-GY	7227
3 Pole 500V 32A	IP66	56SW332LE-GY	8347
3 Pole 500V 50A	IP66	56SW350LE-GY	9722
3 Pole 500V 63A	IP66	56SW363LE-GY	11285
<b>Four Pole Switches Less Enclosure</b>			
4 Pole 500V 20A	IP66	<b>56SW420LE-GY</b>	9542



66CV563-RG



66P563-EO

Description	IP Rating	Reference	Unit MRP [₹]
<b>IP66 Industrial Combination Switch Sockets with Enclosure</b>			
<b>Single Pole Switches Less Enclosure</b>			
500V, 63A with 4 pole switch and 63A 5 Pin Socket	IP66	<b>66CV563-RG</b>	127903
Plug Top 5 Pin 500V 63A	IP66	<b>66P563-EO</b>	38390

Please contact Customer Care Center for Stockable and Non stockable status of references.

\*Bold references are MTO reference.



56SO316RP-LE-GY-EX



56SO432LE-GY



56SO532LE-GY

Description	IP Rating	Reference	Unit MRP [₹]
<b>Surface Socket Outlets</b>			
<b>3 Pin Sockets Less Enclosure</b>			
3 Pin 250V 16A Indian Standard	IP66	56SO316RP-LE-GY-EX	4106
3 Pin 250V 20A Round Pin	IP66	56SO320LE-GY	5960
3 Pin 250V 32A Round Pin	IP66	56SO332LE-GY	6639
<b>4 Pin Sockets Less Enclosure</b>			
4 Pin 500V 20A Round Pin	IP66	<b>56SO420LE-GY</b>	8903
4 Pin 500V 32A Round Pin	IP66	<b>56SO432LE-GY</b>	10645
4 Pin 500V 50A Round Pin	IP66	<b>56SO450LE-GY</b>	16379
<b>5 Pin Sockets Less Enclosure</b>			
5 Pin 500V 10A Round Pin	IP66	<b>56SO510LE-GY</b>	9620
5 Pin 500V 20A Round Pin	IP66	56SO520LE-GY	9529
5 Pin 500V 32A Round Pin	IP66	56SO532LE-GY	11316
5 Pin 500V 40A Round Pin	IP66	56SO540LE-GY	16484
5 Pin 500V 50A Round Pin	IP66	56SO550LE-GY	16923

\*Alternate reference 56SO440-GY (coming soon)



56PA420-EO



56PA532-EO



56CVI520-GY

Description	IP Rating	Reference	Unit MRP [₹]
<b>Plugs</b>			
<b>3 Pin Angle Plugs</b>			
3 pin 250V 16A Round Pin	IP66	56PA316RP-GY-EX	3088
3 Pin 250V 20A Round Pin	IP66	56PA320-EO	6176
3 Pin 250V 32A Round Pin	IP66	56PA332-EO	7135
<b>4 Pin Angle Plugs</b>			
4 Pin 500V 20A Round Pin	IP66	<b>56PA420-EO</b>	7599
4 Pin 500V 32A Round Pin	IP66	<b>56PA432-EO</b>	7910
4 Pin 500V 40A Round Pin	IP66	<b>56PA440-EO</b>	13156
4 Pin 500V 50A Round Pin	IP66	56PA450-EO	9386
<b>5 Pin Angle Plugs</b>			
5 Pin 500V 10A Round Pin	IP66	<b>56PA510-EO</b>	7469
5 Pin 500V 20A Round Pin	IP66	56PA520-EO	7469
5 Pin 500V 32A Round Pin	IP66	56PA532-EO	8547
5 Pin 500V 40A Round Pin	IP66	56PA540-EO	9126
5 Pin 500V 50A Round Pin	IP66	56PA550-EO	9343
<b>Combination Switch Socket Outlet</b>			
<b>IP66 Interlocked Switch Socket with Enclosure</b>			
4 Pin 500V 20A Round Pin	IP66	<b>56CVI420-GY</b>	32648
5 Pin 500V 20A Round Pin	IP66	<b>56CVI520-GY</b>	29536
5 Pin 500V 32A Round Pin	IP66	<b>56CVI532-GY</b>	29806

Please contact Customer Care Center for Stockable and Non stockable status of references.

\*Bold references are MTO reference.

# 56 Series



56DB2-GY



56CB4N-GY

Description	IP Rating	Reference	Unit MRP [₹]
<b>Adaptable Enclosures with Gear Tray</b>			
2 Gangpoints, 198X101X140mm	IP66	<b>56DB2-GY</b>	8149
<b>Junction Boxes</b>			
3 Gangpoints, 300X101X90mm	IP66	<b>56JB3-GY</b>	12214
4 Gangpoints, 204X198X90mm	IP66	<b>56JB4-GY</b>	11466

Description	Module Width	Reference	Unit MRP [₹]
<b>Switchgear Cover Assembly</b>			
For 1,2,3 Pole MCB with 4 Pole RCD (max. 4M Width)	4	56CB4N-GY	6769



56FA2-GY



56E2-GY



56E1-GY

Description	No. of Gangs	Reference	Unit MRP [₹]
<b>Flush Surrounds</b>			
Flush Surround	2	<b>56FA2-GY</b>	3335
Flush Surround	3	<b>56FA3-GY</b>	5251
<b>Mounting Enclosures (Back Boxes)</b>			
101X101X63mm	1	56E1-GY	1437
198X101X63mm	2	56E2-GY	3686

Please contact Customer Care Center for Stockable and Non stockable status of references.  
 \*Bold references are MTO reference.

# SWITCH TO STYLE




Perfect solutions for the perfect you



LIVIA  
Life. Style.



Miluz Lara



Opale




Unica Pure



ZENcelo



Avatar On

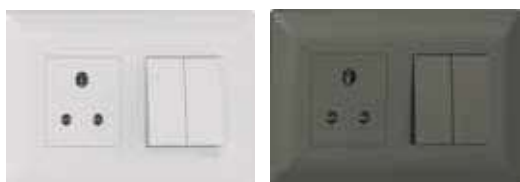

- **Sleek Design** - 2.7mm thin plate with curved body to minimize dust accumulation
- **Stylish Looks** - Soft white texture with glossy finish
- **Robust & Strong** - Innovative honeycomb designed grid plate for extra rigidity
- **Reliable** - High grade heat-resistant polycarbonate and laser marked wiring diagrams.
- **Easy to Install** - Snap-In / Snap-Out front loading modules and Bigger terminal holes
- **Green & Eco Friendly** - RoHS compliant range



Description	Reference for White	Unit MRP [₹]	Reference for Pristine Grey	Unit MRP [₹]
<b>Switches</b>				
10AX 1 way switch	P1001_N	145	P1001_PG_N	211
10AX 1 way switch with Indicator lamp	<b>P1081</b>	314	<b>P1081_PG_N</b>	415
10AX 2 way switch	P1002_N	246	P1002_PG_N	310
16AX 1 way switch	P1101_N	268	P1101_PG_N	329
16AX 1 way switch with Indicator lamp	P1181_N	373	P1181_PG_N	443
16AX 1 way switch (2M)	<b>P1121_N</b>	407	<b>P1121_PG_N</b>	529
16AX 2 way switch	P1102_N	365	<b>P1102_PG_N</b>	478
20A 1 way switch (1M) with indicator lamp	P11201_N	343	P11201_PG_N	393
20A DP switch with Indicator lamp	P1120_N	614	<b>P1120_PG_N</b>	800
32A DP switch with Indicator lamp	P1132_N	900	P1132_PG_N	1110
<b>Bell Push</b>				
10A Bell Push switch	P1005_N	275	P1005_PG_N	349
10A Bell Push switch (2M)	P1025_N	394	<b>P1025_PG_N</b>	468
10A bell push switch with Indicator	P1085_N	335	<b>P1085_PG_N</b>	444
10A bell push switch with Indicator (2M)	<b>P1086_N</b>	440	<b>P1086_PG_N</b>	558
<b>Sockets</b>				
6A 3Pin socket Outlet with shutter (BIS)	P2005NS_N	289	P2005NS_PG_N	356
10A/16A 3-pin Socket Outlet with Shutter	P2106_N	435	P2106_PG_N	527
<b>Fan Regulators &amp; Dimmers</b>				
Step type fan regulator (1M)	P3100_N	872	P3100_PG_N	1060
Step type fan regulator (2M)	P3200_N	1007	P3200_PG_N	1258
Dimmer 400W (1M)	<b>P3004_N</b>	1629	<b>P3004_PG_N</b>	2106
Dimmer 1000W (2M)	<b>P3012</b>	2424	<b>P3012_PG_N</b>	2658
<b>USB Charger</b>				
USB Charger	P7002_N	2132	P7002_PG_N	2478
Livia - A+C Type USB Charger (1M)	P7003_N	3210	P7003_PG_N	3864
<b>Accessories</b>				
RJ 11 Telephone outlet with shutter	P4011_N	250	P4011_PG_N	329
RJ 45 Cat 5e Data outlet with shutter	P4045_N	849	P4045_PG_N	1018
RJ 45 Cat6 Data outlet with shutter	P4046_N	945	P4046_PG_N	1204
TV socket	P4500_N	238	P4500_PG_N	318
Blank off unit (1M)	P0001_N	65	P0001_PG_N	84
Foot Lamp with LED	P7001_N	1026	P7001_PG_N	1222
Cord Outlet	-	-	<b>P4550_PG_N</b>	343
LED Phase Indicator	P5001_N	416	-	-
<b>Mini MCB</b>				
10A Mini MCB	P8010_N	591	P8010_PG_N	693
16A Mini MCB	P8016_N	591	P8016_PG_N	693
20A Mini MCB	P8020_N	591	P8020_PG_N	693
25A Mini MCB	P8025_N	591	P8025_PG_N	693
32A Mini MCB	P8032_N	591	P8032_PG_N	693

\* Available till stocks lasts

Please contact Customer Care Center for Stockable and Non stockable status of references.

\*Bold references are MTO reference.



P1186MS\_N



P6002\_N



P6004\_N

Description	Reference for White	Unit MRP [₹]	Reference for Pristine Grey	Unit MRP [₹]
<b>Motor Starter Switch</b>				
25A Motor Starter switch	P1186MS_N	1533	<b>P1186MS_PG_N</b>	1925
<b>Hotel Series</b>				
DND Switch	<b>P6002_N</b>	350	<b>P6002_PG_N</b>	379
MMR Switch	<b>P6004_N</b>	321	<b>P6004_PG_N</b>	379
DND & MMR Indicator	<b>P6013</b>	1024	<b>P6013_PG_N</b>	1223
20A Key Card Switch - Electronic (3M)	<b>P6005_N</b>	5436	<b>P6005_PG_N</b>	7117



P0703\_N



P0704\_N



P0706\_PG\_N

Description	Reference for White	Unit MRP [₹]	Reference for Pristine Grey	Unit MRP [₹]
<b>Cover Plates</b>				
1-2 M Grid & 1 M Cover Frame	P0701_N	168	P0701_PG_N	202
1-2 M Grid & 2 M Cover Frame	P0702_N	168	P0702_PG_N	205
3 M Grid & 3 M Cover Frame	P0703_N	212	P0703_PG_N	241
4 M Grid & 4 M Cover Frame	P0704_N	245	P0704_PG_N	299
6 M Grid & 6 M Cover Frame	P0706_N	314	P0706_PG_N	392
8 M Grid & 8 M Cover Frame - Horizontal	P0708_N	412	P0708_PG_N	492
8 M Grid & 8 M Cover Frame - Square	P0709_N	497	P0709_PG_N	597
9 M Grid & 9M Cover Frame	<b>P07010_N</b>	465	<b>P07010_PG_N</b>	725
12 M Grid & 12 M Cover Frame	P0712_N	593	P0712_PG_N	725
16 M Grid & 16M Cover Frame	P07016_N	713	<b>P07016_PG_N</b>	988
18 M Grid & 18 M Cover Frame	P0718_N	883	<b>P0718_PG_N</b>	1043

Please contact Customer Care Center for Stockable and Non stockable status of references.  
\*Bold references are MTO reference.



**A fusion of beauty and functionality:**

- Dew-drop-inspired design prevents dust and dirt accumulation.
- The 'volcanic' curve ensures ample room for wiring, for a seamless user experience.

**Ideal for Mivan and modern construction methods:**

- Seamlessly fits into newer (40 mm.) and conventional (50 mm.) metal boxes.

**Durability and Safety:**

- Prevents accidental shocks with no single-pin insertion in sockets.
- Durable copper contact for an enhanced life span (lasts up to 2 lakh clicks, or 30 years, at 15 clicks/day)

**Effortless Installation:**

- Clear markings for ideal wire strip length for accurate and safe installation
- Front-loading components and double-sided wire entry in sockets for greater ease.

**Seamless Connectivity:**

- Wiser™ is designed to optimize energy usage and is fully compatible with Miluz Lara switches and sockets.

Now Miluz Lara comes with the 10 years of warranty



Description	Reference for White	Unit MRP [₹]	Pack	Reference for Anthracite	Unit MRP [₹]	Pack
<b>Switches</b>						
10 A 1-way Switch (1M)	MLSW101M1W_WH	126	20	MLSW101M1W_AN	145	20
10 A 1-way Switch with Indicator (1M)	MLSWI101M1W_WH	296	20	<b>MLSWI101M1W_AN</b>	321	20
10 A 1-way Switch (2M)	<b>MLSW102M1W_WH</b>	321	10	<b>MLSW102M1W_AN</b>	348	10
10 A 1-way Switch with Indicator (2M)	<b>MLSWI102M1W_WH</b>	354	10	<b>MLSWI102M1W_AN</b>	402	10
10 A 2-way Switch (1M)	MLSW101M2W_WH	253	20	MLSW101M2W_AN	291	20
16 A 1-way Switch (1M)	MLSW161M1W_WH	271	20	MLSW161M1W_AN	312	20
16 A 1-way Switch with Indicator (1M)	MLSWI161M1W_WH	382	20	MLSWI161M1W_AN	439	20
16 A 1-way Switch (2M)	<b>MLSW162M1W_WH</b>	465	10	<b>MLSW162M1W_AN</b>	535	10
16 A 1-way Switch with Indicator (2M)	MLSWI162M1W_WH	502	10	<b>MLSWI162M1W_AN</b>	578	10
16 A 2-way Switch (1M)	<b>MLSW161M2W_WH</b>	409	20	<b>MLSW161M2W_AN</b>	482	20
20 A DP Switch with Indicator (2M)	MLSWI202MDP_WH	646	10	MLSWI202MDP_AN	840	10
32 A DP Switch with Indicator (2M)	MLSWI322MDP_WH	1063	10	MLSWI322MDP_AN	1165	10
<b>Motor Starter Switch</b>						
25 A Motor Starter Switch (2M)	MLMOTSTR2M_WH	1606	10	MLMOTSTR2M_AN	1847	10
<b>Bell Push Switch</b>						
6 A Bell Push (1M)	MLBP1M_WH	286	20	MLBP1M_AN	362	20
6 A Bell Push with Indicator (1M)	MLBPI1M_WH	347	20	MLBPI1M_AN	452	20
6 A Bell Push (2M)	MLBP2M_WH	397	10	<b>MLBP2M_AN</b>	527	10
6 A Bell Push with Indicator (2M)	MLBPI2M_WH	462	10	<b>MLBPI2M_AN</b>	573	10
<b>Sockets</b>						
6 A 3 Pin Socket with Shutter (2M)	MLSO62M3P_WH	251	10	MLSO62M3P_AN	289	10
6 A/16 A 3P Socket with Shutter (2M)	MLSO6162M3P_WH	402	10	MLSO6162M3P_AN	462	10
6A Switched Socket 2M	MLSWSO62M_WH	439	10	MLSWSO62M_AN	526	10
<b>Fan Regulators and Dimmers</b>						
4-Step Fan Regulator (1M)	MLFR4STP1M_WH	874	20	MLFR4STP1M_AN	1006	20
5-Step Fan Regulator (2M)	MLFR5STP2M_WH	1104	10	MLFR5STP2M_AN	1270	10
400 W Dimmer (1M)	<b>MLDMR1M_WH*</b>	1537	10	<b>MLDMR1M_AN*</b>	1768	10
<b>USB Charger</b>						
2.1 A USB Charger (1M)	<b>MLUSBA1M_WH</b>	2019	10	<b>MLUSBA1M_AN</b>	2210	10
1M 12 W Type A+C USB Charger (1M)	MLUSBAC1M_WH	3014	20	MLUSBAC1M_AN	3466	20
USB A+C 21W PD Horizontal	MLUSBAC2MPDH_WH	4150	10	MLUSBAC2MPDH_AN	4979	10
<b>Air Quality Indicator</b>						
Air Quality Indicator (2M)	<b>MLAQI2M_WH*</b>	-	-	<b>MLAQI2M_AN*</b>	-	-
<b>Voltage Surge Protector</b>						
Voltage Surge Protector 230 V (1M)	<b>MLVSP1M_WH</b>	2430	10	<b>MLVSP1M_AN</b>	2794	10

\*Prices will be shared on request

Please contact Customer Care Center for Stockable and Non stockable status of references.


\*Bold references are MTO reference.




Description	Reference for White	Unit MRP [₹]	Pack	Reference for Anthracite	Unit MRP [₹]	Pack
<b>Accessories</b>						
TV Socket (1M)	MLTV1M_WH	239	10	MLTV1M_AN	311	10
RJ11 Tel. Outlet with Shutter (1M)	MLRJ111M_WH	249	10	MLRJ111M_AN	326	10
RJ45 Cat. 6 Data Outlet Shuttered (1M)	MLRJ451M_WH	904	10	MLRJ451M_AN	1105	10
Preterminated HDMI socket (1M)	<b>MLHDMI1M_WH</b>	1507	10	<b>MLHDMI1M_AN</b>	1733	10
LED Footlamp (2M)	MLFTLMP2M_WH	954	10	MLFTLMP2M_AN	1055	10
Door Chime (2M)	<b>MLDRCHM2M_WH*</b>	1205	-	<b>MLDRCHM2M_AN*</b>	1386	-
Blank Off Unit (1M)	MLBLANK1M_WH	62	20	MLBLANK1M_AN	80	20
Socket Adaptor (2M)	<b>MLSA2M_NC</b>	141	10	-	-	-
LED Phase Indicator (Red) (1M)	MLPHSIND1M_RD	402	10	-	-	-
<b>MCB</b>						
16A MCB SP 1M C curve	<b>MLMM161P_WH</b>	804	10	<b>MLMM161P_AN</b>	854	10
20A MCB SP 1M C curve	MLMM201P_WH	804	10	<b>MLMM201P_AN</b>	854	10
32A MCB SP 1M C curve	MLMM321P_WH	804	10	MLMM321P_AN	854	10
<b>Hospitality</b>						
Curtain Control Switch	MLCCSW2M_WH	870	10	MLCCSW2M_AN	999	10
DND MMR Switch	MLDMSW2M_WH	854	10	MLDMSW2M_AN	979	10
DND MMR Indicator, ANTHRACITE	MLDMI1M_NA	653	10	-	-	-
Electronic Keycard Switch	MLKECRDSW2M_WH	4520	10	MLKECRDSW2M_AN	5023	10
115V Shaver Socket Horizontal	MLSHVRSO3M_WH	4018	10	MLSHVRSO3M_AN	4520	10
<b>Cover Plates</b>						
1M or 2M Grid and 1M Cover Frame	MLCP1M_WH	172	15	MLCP1M_AN	223	15
1M or 2M Grid and 2M Cover Frame	MLCP2M_WH	172	15	MLCP2M_AN	223	15
3M Grid and 3M Cover Frame	MLCP3M_WH	220	10	MLCP3M_AN	287	10
3M Uni Grid and 3M Cover Frame	MLCP3MU_WH	241	10	MLCP3MU_AN	313	10
4M Grid and 4M Cover Frame	MLCP4M_WH	254	8	MLCP4M_AN	330	8
6M Grid and 6M Cover Frame	MLCP6M_WH	320	5	MLCP6M_AN	416	5
8M Grid and 8M Cover Frame, Horizontal	MLCP8MH_WH	422	5	MLCP8MH_AN	549	5
8M Grid and 8M Cover Frame, Square	MLCP8MS_WH	554	5	MLCP8MS_AN	721	5
9M Cover Frame + 8M Grid	MLCP9M_WH	521	5	<b>MLCP9M_AN</b>	677	5
12M Grid and 12M Cover Frame	MLCP12M_WH	671	5	MLCP12M_AN	873	5
16M Cover Frame and Grid	MLCP16M_WH	799	5	MLCP16M_AN	1039	5
18M Grid and 18M Cover Frame	<b>MLCP18M_WH</b>	966	5	<b>MLCP18M_AN</b>	1256	5

Please contact Customer Care Center for Stockable and Non stockable status of references.  
\*Bold references are MTO reference.


# Wiring Diagram Miluz Lara

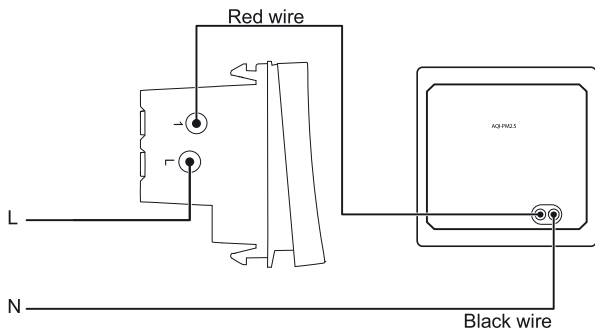

> Air Quality Indicator  
MLAQI2M\_WH, MLAQI2M\_AN

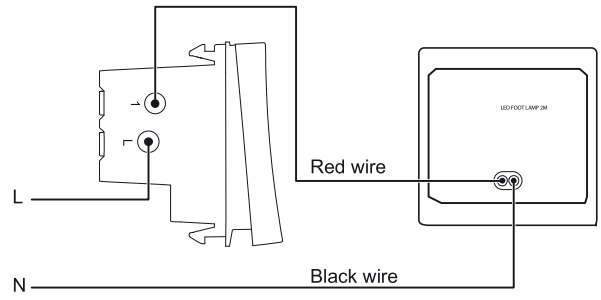


> LED Footlamp  
MLFTLMP2M\_WH, MLFTLMP2M\_AN

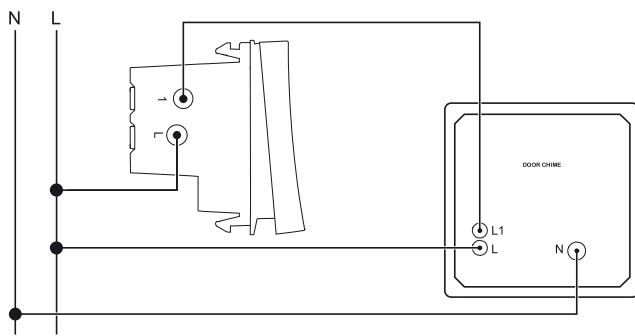

> Door Chime  
MLDRCHM2M\_WH, MLDRCHM2M\_AN

## 12 W Type A+C USB Charger

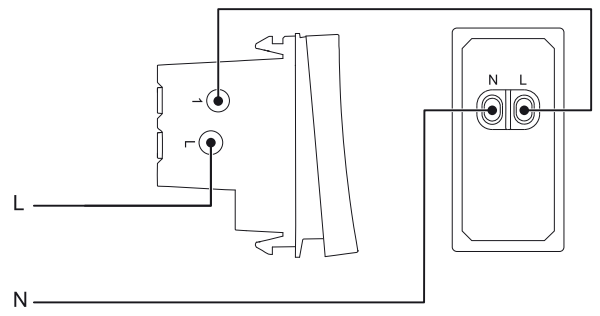

> USB Chargers  
MLUSBAC1M\_WH, MLUSBAC1M\_AN

## 10 Years Warranty T&C

- Schneider Electric shall, at its sole discretion, repair or replace switches upto 16A (without LED indicator/lamp) and or 6A & 16A sockets in white color only if the Product is found to be having manufacturing defect (means defects solely as a result of faulty material and/or workmanship during manufacturing of Product) within 10 years from the date of manufacture of Product or from the date of invoice of Product, whichever is earlier.
- For all other wiring accessories, the warranty shall be 18 months starting from the date of delivery or 24 months from the date of manufacturing, whichever is earlier
- The warranty defines Schneider Electric's overall sole liability which does not include any other liability whatsoever including without limitation consequential losses or damages or re-installation costs arising from or in relation to the defective products.
- Schneider Electric reserves the right to change and/or improve the design of its Products without prior notice
- In any event whatsoever, if same Product with a similar design is not available, the Product will be replaced with an equivalent model available at that time at sole discretion of Schneider Electric.
- ***This warranty for the above products shall be rendered null & void in case of the following:***
  - a. If the original Schneider Electric mounting boxes have not been used to mount the plates & accessories.
  - b. If any attempt has been made to rectify, dismantle, tamper, or alter the product by any third party or by the customer himself.
  - c. If any damage resulting from the use of any cleaning chemicals on the Product which can adversely affect the product material (Like Acetone, Thinner, turpentine Oil etc.)
  - d. If the products are not installed as per the appropriate design specifications
- Warranty facilitations as per the standard process where customer to contact Customer Care Center (Email, Toll Free, chat) with relevant details & Log the complaint.

# Opale - Switches with Satin Finish



- **Patented Smooth Satin Finish** - Scratch Resistant, Easy to Clean & Prevents light reflection off surface
- **Safe to Use** - High grade flame retardant polycarbonate material & Child Proof sockets with unique shutter design
- **Hassle Free Operation** - 'Soft sound' switches with Gold plated Data Socket contacts for better connection
- **Easy to Install** - Snap-In / Snap-Out front loading modules and terminals with indented screws
- **Green & Eco Friendly** - RoHS compliant range



X1001WH



X1286WH



X1186WH



X1005WH



X1085WH



X2005WHNS



X2106WH



X3200WHCM



X3104WH



X7003WH



X5001

Description	Reference for White	Unit MRP [₹]	Pack	Reference for Coke Grey	Unit MRP [₹]	Pack
<b>Switches</b>						
6AX 1 way switch	X1001WH	262	20	AAKY1001	332	20
6AX 1 way switch with Indicator lamp	<b>X1081WH</b>	491	20	-	-	-
6AX 2 way switch	X1002WH	367	20	-	-	-
16AX 1 way switch	X1101WH	420	20	AAKY1101	531	20
16AX 1 way switch with Indicator lamp	X1181WH	600	20	AAKY1181	702	20
16AX 2 way switch	X1102WH	566	20	-	-	-
20A DP switch with Indicator (2M)	X1286WH	992	10	-	-	-
32A DP switch (2M)	AAKX1232	1491	10	-	-	-
<b>Motor Starter Switch</b>						
25A Motor Starter switch	X1186WH	2809	10	-	-	-
<b>Bell Push</b>						
6A Bell Push	X1005WH	411	20	-	-	-
6A Bell Push (2M)	X1025WH	588	10	-	-	-
6A Bell Push with Indicator	X1085WH	632	20	-	-	-
<b>Sockets</b>						
6A 3-Pin Socket Outlet with Shutter (BIS)	X2005WHNS	447	10	AAKY2005NS	540	10
6A/16A 3-Pin Socket Outlet with Shutter	X2106WH	690	10	AAKY2106	821	10
<b>Fan Regulators &amp; Dimmers</b>						
Step Fan Regulator (1M)	X3100CMWH	1101	10	-	-	-
Step Type Fan Regulator (2M)	X3200WHCM	1588	5	-	-	-
Dimmer 400W (1M)	X3104WH	1471	10	-	-	-
Dimmer 400W (2M)	X3004WH	2288	5	-	-	-
<b>USB Chargers</b>						
2 Gang USB Charger - 2.1A (2M)	<b>X7003WH</b>	4345	15	-	-	-
<b>Accessories</b>						
RJ11 Telephone outlet with shutter	X4011WH	374	10	-	-	-
RJ45 Data Outlet with shutter	X4045WH	1288	20	-	-	-
TV Socket	X4500WH	350	10	-	-	-
RJ45 Cover for Key Stone Type	<b>X4050WH</b>	519	10	-	-	-
Buzzer	<b>X3300WH</b>	1679	2	-	-	-
Blank off unit (1M)	X0001WH	97	10	-	-	-
Neon Phase Indicator (Red)	X5001	595	20	-	-	-

Please contact Customer Care Center for Stockable and Non stockable status of references.  
\*Bold references are MTO reference.

# Opale - Switches with Satin Finish



AAKX6006



AAKX6005

Description	Reference	Unit MRP [₹]	Pack
<b>Hotel Series*</b>			
Key Tag Switch (Mechanical Type 20 A)	AAKX6005	2162	1
Shaver Socket	<b>AAKX6006</b>	9538	1

\*Available in white colour only



X0703



X0704



X0708

Description	Reference for White	Unit MRP [₹]	Pack	Reference for Coke Grey	Unit MRP [₹]	Pack
<b>Cover Plates</b>						
1-2 M Grid & 1 M Cover Frame	X0701	238	10	AAKY0801	314	10
1-2 M Grid & 2 M Cover Frame	X0702	252	10	-	-	-
3 M Grid & 3 M Cover Frame	X0703	298	10	AAKY0803	363	10
4 M Grid & 4 M Cover Frame	X0704	350	10	-	-	-
6 M Grid & 6 M Cover Frame	X0706	488	5	AAKY0806	583	5
8 M Grid & 8 M Cover Frame - Horizontal	X0708	634	5	-	-	-
8 M Grid & 8 M Cover Frame - Square	X0709	757	5	-	-	-
12 M Grid & 12 M Cover Frame	X0712	898	5	<b>AAKY0812</b>	1354	5
18 M Grid & 18 M Cover Frame	AAKX0718	1171	5	-	-	-

Please contact Customer Care Center for Stockable and Non stockable status of references.

\*Bold references are MTO reference.

W.E.F. January 15<sup>th</sup>, 2026

# Unica Pure - Irresistibly Beautiful



Wood



Glass



Metal Rhodium Black



Sandy Beige



Polar White



Volcanic Grey



Pearl Black



Pewter Grey



Oak

## Irresistibly Beautiful

- Authentic finishes - developed from the high quality natural material
- Ingenious Design - Demarcated dolly depicting clear on/off mode of the switch
- Modish Colors - perfectly gel with neutral, accent wall colors and blends perfectly with any decor

## Irresistibly Safe & Sturdy

- Self Piercing Terminal - ensuring completely safe, robust and fast installation
- Facile & Guarded Technology - reduces tension in the switch rocker & increases the longevity of the switch
- Plated metal with Plastic over molded Gridplate - Robust, rigid & shock proof gridplate, ensuring durable installation on the metal box

## Irresistibly Easy

- Key Hole Feature - Angular and linear adjustments of the gridplate can be easily achieved
- Revolutionary Ease of Mounting with Indicators & Markings

## Irresistibly Sustainable

- Green Premium - Complies to HIGHEST INTERNATIONAL STANDARD of Green
- Certification for manufactured products (RoHS, REACH, PEP, EoLI) and is 100% Recyclable

## Irresistibly Innovative

- Future Ready - Features of Voice & Mobile control to fit with smart homes

## Irresistibly Versatile


- One Stop Shop - Extensive range covering residential, office, commercial or hospitality
- **Intermediate switches to control multiple 2way switches**

## Unica Pure switches with six patented technologies




### Life Guarded Sockets

Eliminate possibility of Single Pin Insertion making it extra safe for children



### Facile & Guarded Technology

Reduces tension in the switch rocker & increases the longevity of the switch




### Key Hole Feature

Angular and linear adjustments of the gridplate can be easily achieved



### Adjoining (V) Feature Technology

Ensuring perfect alignment of switches



### Self-piercing Terminal

Ensuring completely safe, robust and fast installation

# Unica Pure - Irresistibly Beautiful



UNS61SW1M\_WE



UNS161SWL1M\_WE



UNS162MSWL1M\_WE



UNS10SW1M\_WE



UNS162SW2M\_WE



UNSMTSTART2M\_WE



UNS616SK2M\_WE



UNSSWSO62M\_GY



UNSUSBAC2MPDH\_WE



UNSACUSB1P1M\_WE



UNS5STFAN2M\_WE



UNSHDMI\_WE



UNSCPTVDIG1M\_WE

Description	Reference for Polar White	Unit MRP	Pack	Reference for Volcanic Grey	Unit MRP	Pack
<b>6A Switches</b>						
6AX 1 Way Switch	UNS61SW1M_WE	236	20	UNS61SW1M_GY	273	20
6AX 1 Way Switch With Indicator	UNS61SWL1M_WE	422	20	UNS61SWL1M_GY	483	20
6AX 2 Way Switch	UNS62SW1M_WE	339	10	UNS62SW1M_GY	379	10
<b>10A Intermediate Switches</b>						
10AX Intermediate Switch	UNS10SW1M_WE	1546	1	UNS10SW1M_GY	1865	1
<b>16AX Switches</b>						
16AX 1 Way Switch	UNS161SW1M_WE	391	20	UNS161SW1M_GY	456	20
16AX 1 Way Switch With Indicator	UNS161SWL1M_WE	468	20	UNS161SWL1M_GY	544	20
16AX 2 Way Switch, Polar White	UNS162SW1M_WE	522	10	UNS162SW1M_GY	614	10
16A Master Switch, 2 Way, With Locator & Label	<b>UNS162MSWL1M_WE</b>	1213	20	<b>UNS162MSWL1M_GY</b>	1434	1
16Ax 2 Way 2M Switch	UNS162SW2M_WE	528	10	UNS162SW2M_GY	627	10
16AX~20A 1Way switch with Neon indicator	UNS201SWL1M_WE	464	10	UNS201SWL1M_GY	548	10
<b>Double Pole Switches</b>						
20A Double Pole Switch With Indicator	UNS20DP2M_WE	938	10	UNS20DP2M_GY	1105	1
32A Double Pole Switch With Indicator	UNS32DP2M_WE	1409	10	UNS32DP2M_GY	1687	10
<b>Motor Starter Switch</b>						
Motor Starter	UNSMSTART2M_WE	2138	10	UNSMSTART2M_GY	2529	10
<b>Bell Switches</b>						
6A Bellpress, 1M	UNS6BP1M_WE	346	20	UNS6BP1M_GY	406	20
6A Bellpress With Indicator, 1M	UNS6BPL1M_WE	479	20	UNS6BPL1M_GY	573	1
6A Bellpress, 2M, Polar White	UNS6BP2M_WE	478	10	UNS6BP2M_GY	563	1
6A Bellpress With Indicator, 2M	UNS6BPL2M_WE	590	10	UNS6BPL2M_GY	693	1
<b>6A Sockets</b>						
6A 3PIN Sockets outlet with Shutter (BIS)	UNS6SK3P2MNS_WE	495	10	UNS6SK3P2MNS_GY	547	10
6A Switched Socket 2M	UNSSWSO62M_WE	723	10	UNSSWSO62M_GY	796	10
<b>6/16A Sockets</b>						
6/16A Socket	UNS616SK2M_WE	582	10	UNS616SK2M_GY	723	10
<b>USB Chargers</b>						
2.1A 5V USB Charger, 2 Module	UNS21USB2P2M_WE	3596	10	UNS21USB2P2M_GY	4250	1
2.1A 5V USB Charger, 1 Module	UNS21USB1P1M_WE	2472	20	UNS21USB1P1M_GY	2932	20
2.4A 5V A+C USB Charger, 1 Module	UNSACUSB1P1M_WE	3807	10	UNSACUSB1P1M_GY	4281	10
USB A+C 21W PDH 2M WE	UNSUSBAC2MPDH_WE	6027	10	UNSUSBAC2MPDH_GY	6630	10
<b>Blank Plates</b>						
Single Module Blank Plate	UNSBLANK1M_WE	85	20	UNSBLANK1M_GY	95	20
<b>Fan Regulators</b>						
4 Steps 360 Deg Fan Regulator, 1M	UNS4STFAN1M_WE	1025	20	UNS4STFAN1M_GY	1187	20
5 Steps 360 Deg Fan Regulator, 2M	UNS5STFAN2M_WE	1631	10	UNS5STFAN2M_GY	1841	10
<b>Emergency Light Indicator</b>						
Emergency Light Module*	<b>UNSEMERGENCY2M_WE</b>	12742	1	-	-	-
<b>Network, Connectivity &amp; Media Series</b>						
RJ 11 (WITH Shutter)	UNSRJ11_1M_WE	330	20	UNSRJ11_1M_GY	388	20
RJ 45 (WITH Shutter), Cat 6	UNSRJ45_1M_WE	1201	20	UNSRJ45_1M_GY	1391	20
TV Socket Coaxial	UNSTVCOAX1M_WE	346	20	UNSTVCOAX1M_GY	410	20
Volume Control	<b>UNSVOLCTRL2M_WE</b>	2763	10	<b>UNSVOLCTRL2M_GY</b>	3294	10
HDMI	<b>UNSHDMI_WE</b>	2368	20	UNSHDMI_GY	2671	20
TV Socket Digital (F-Connector)	<b>UNSCPTVDIG1M_WE</b>	392	1	-	-	-
PIR Motion Sensor*	UNSPIR_WE	11461	4	-	-	-

Please contact Customer Care Center for Stockable and Non stockable status of references.

\*Bold references are MTO reference.

# Unica Pure - Irresistibly Beautiful



UNSEKCSW\_WE



UNSCURTAINSW2M\_WE



UNSSHAVER\_WE



UNSPIR\_WE



UNSSKTLT2M\_WE



UNSPHASEG1M



UNSPHASER1M

Description	Reference for Polar White	Unit MRP [₹]	Pack	Reference for Volcanic Grey	Unit MRP [₹]	Pack
<b>Hotel Series*</b>						
Cord Outlet	<b>UNSCORD1M_WE</b>	460	20	<b>UNSCORD1M_GY</b>	511	20
DND / MMR Indicator*	<b>UNSDM1M</b>	3763	20	-	-	-
DND/MMR Indicator v.2	<b>UNSDM1M_WE</b>	1880	-	UNSDM1M_GY	2148	-
DND Switch	UNSDNDSW1M_WE	636	10	UNSDNDSW1M_GY	776	10
MMR Switch	UNSMMRSW1M_WE	636	10	UNSMMRSW1M_GY	776	10
SW DND MMR with interlock	UNSDNDMMRSW2M_WE	1060	10	UNSDNDMMRSW2M_GY	1271	10
Electronic Keycard Switch, White	UNSEKCSW_WE	8462	5	UNSEKCSW_GY	9781	5
Electronic Keycard Switch, Sandy Beige	<b>UNSEKCSW_CL</b>	8839	5	<b>UNSEKCSW_CD</b>	8721	5
Curtain Control Switch	<b>UNSCURTAINSW2M_WE</b>	1163	10	<b>UNSCURTAINSW2M_GY</b>	1348	10
Shaver Socket	UNSSHAVER_WE	8834	1	UNSSHAVER_GY	9634	1
Skirt Light with LED, 2M	UNSSKTLT2M_WE	1550	10	UNSSKTLT2M_GY	1814	10
Door Chime 230V AC 2M	UNSICHIME2M_WE	1619	-	UNSICHIME2M_GY	1776	-

Description	Reference	Unit MRP [₹]	Pack
<b>LED Phase Indicator</b>			
LED Phase Indicator, Red	UNSPHASER1M	570	20
LED Phase Indicator, Green	UNSPHASEG1M	570	20
LED Phase Indicator, Yellow	<b>UNSPHASEY1M</b>	570	20

Please contact Customer Care Center for Stockable and Non stockable status of references.  
\*Bold references are MTO reference.

# Unica Pure - Irresistibly Beautiful



UNPGP2M



UNPGP6M

Description	Reference for Gridplate	Unit MRP [₹]	Pack
<b>Cover Plates</b>			
2 Module Gridplate (Fixing Frame) Only	UNPGP2M	192	4
3 Module Gridplate (Fixing Frame) Only	UNPGP3M	234	9
4 Module Gridplate (Fixing Frame) Only	UNPGP4M	270	8
6 Module Gridplate (Fixing Frame) Only	UNPGP6M	367	9
8 Module Gridplate (Fixing Frame) Only, Linear	UNPGP8ML	378	9
8 Module Gridplate (Fixing Frame) Only, Square	UNPGP8MSQ	484	6
12 Module Gridplate (Fixing Frame) Only	UNPGP12M	565	6



UNPSP2M\_WD



UNPSP6M\_WD


Description	Reference for Oak Wood	Unit MRP [₹]	Pack
<b>Cover Plates</b>			
1 Module Wood Cover Frame Only	UNPSP1M_WD	2756	6
2 Module Wood Cover Frame Only	UNPSP2M_WD	2929	6
3 Module Wood Cover Frame Only	UNPSP3M_WD	3626	6
4 Module Wood Cover Frame Only	UNPSP4M_WD	4196	6
6 Module Wood Cover Frame Only	UNPSP6M_WD	5987	3
8 Module Wood Cover Frame Only, Linear	UNPSP8ML_WD	7276	3
8 Module Wood Cover Frame Only, Square	<b>UNPSP8MSQ_WD</b>	8679	6
12 Module Wood Cover Frame Only	UNPSP12M_WD	11604	6



UNPSP2M\_GW



UNPSP6M\_GW



UNPSP2M\_GB




UNPSP6M\_GB

Description	Reference for Aqua Glass	Unit MRP [₹]	Pack	Reference for Pearl Black Glass	Unit MRP [₹]	Pack
<b>Cover Plates</b>						
1 Module Aqua Glass Cover Frame Only	UNPSP1M_GW	1524	6	UNPSP1M_GB	1804	6
2 Module Aqua Glass Cover Frame Only	UNPSP2M_GW	1714	6	UNPSP2M_GB	2029	6
3 Module Aqua Glass Cover Frame Only	UNPSP3M_GW	1930	6	UNPSP3M_GB	2206	6
4 Module Aqua Glass Cover Frame Only	UNPSP4M_GW	2017	6	UNPSP4M_GB	2391	6
6 Module Aqua Glass Cover Frame Only	UNPSP6M_GW	3644	3	UNPSP6M_GB	4258	3
8M Aqua Glass Cover Frame Only, Linear	UNPSP8ML_GW	4141	3	UNPSP8ML_GB	4878	3
8M Aqua Glass Cover Frame Only, Square	UNPSP8MSQ_GW	5245	6	UNPSP8MSQ_GB	6181	6
12 Module Aqua Glass Cover Frame Only	UNPSP12M_GW	6536	6	UNPSP12M_GB	7692	6


Please contact Customer Care Center for Stockable and Non stockable status of references.

\*Bold references are MTO reference.


# Unica Pure - Irresistibly Beautiful



UNPSP2M\_ML

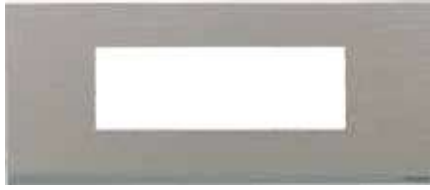

UNPSP6M\_ML



UNPSP2M\_MD



UNPSP6M\_MD

Description	Reference for Pewter Grey Metal	Unit MRP [₹]	Pack	Reference for Black Metal	Unit MRP [₹]	Pack
<b>Cover Plates</b>						
1 Module Pw Grey Metal Cover Frame Only	<b>UNPSP1M_ML</b>	2723	6	UNPSP1M_MD	2723	6
2 Module Pw Grey Metal Cover Frame Only	UNPSP2M_ML	3022	6	UNPSP2M_MD	3022	6
3 Module Pw Grey Metal Cover Frame Only	UNPSP3M_ML	3440	6	UNPSP3M_MD	3440	6
4 Module Pw Grey Metal Cover Frame Only	UNPSP4M_ML	3616	6	UNPSP4M_MD	3616	6
6 Module Pw Grey Metal Cover Frame Only	UNPSP6M_ML	6403	3	UNPSP6M_MD	6403	3
8Module Pw Grey Metal CF Only, Linear	UNPSP8ML_ML	7214	3	UNPSP8ML_MD	7214	3
8 Module Pw Grey Metal CF Only, Suare	UNPSP8MSQ_ML	9163	6	UNPSP8MSQ_MD	9163	6
12Module Pw Grey Metal Cover Frame Only	UNPSP12M_ML	11367	6	UNPSP12M_MD	11367	6



UNSCP2M\_WE



UNSCP6M\_WE



UNSCP2M\_GY



UNSCP6M\_GY



UNSCP2M\_CD



UNSCP6M\_CD



UNSCP2M\_CL




UNSCP6M\_CL

Description	Reference for Molded Polar White	Unit MRP [₹]	Pack	Reference for Molded Volcanic Grey	Unit MRP [₹]	Pack	Reference for Painted Mocha Brown	Unit MRP [₹]	Pack	Reference for Painted Sandy Biege	Unit MRP [₹]	Pack
<b>Cover Plates</b>												
1 Module Plastic Surround and Gridplate	UNSCP1M_WE	267	20	UNSCP1M_GY	379	20	<b>UNSCP1M_CD</b>	511	20	UNSCP1M_CL	520	20
2 Module Plastic Surround and Gridplate	UNSCP2M_WE	298	20	UNSCP2M_GY	425	20	UNSCP2M_CD	570	20	UNSCP2M_CL	590	20
3 Module Plastic Surround and Gridplate	UNSCP3M_WE	340	10	UNSCP3M_GY	484	10	UNSCP3M_CD	664	10	UNSCP3M_CL	662	10
4 Module Plastic Surround and Gridplate	UNSCP4M_WE	359	14	UNSCP4M_GY	517	14	UNSCP4M_CD	694	14	UNSCP4M_CL	694	14
6 Module Plastic Surround and Gridplate	UNSCP6M_WE	626	5	UNSCP6M_GY	893	5	UNSCP6M_CD	1195	5	UNSCP6M_CL	1236	5
8 Module Plastic Surround and Gridplate, Linear	UNSCP8ML_WE	705	5	UNSCP8ML_GY	997	5	UNSCP8ML_CD	1348	5	UNSCP8ML_CL	1373	5
8 Module Plastic Surround and Gridplate, Square	UNSCP8MSQ_WE	911	10	UNSCP8MSQ_GY	1382	10	UNSCP8MSQ_CD	1706	10	UNSCP8MSQ_CL	1706	5
9 Module Plastic Surround and Gridplate	UNSCP9M_WE	1144	5	UNSCP9M_GY	1786	5	-	-	-	-	-	
12 Module Plastic Surround and Gridplate	UNSCP12M_WE	1274	5	UNSCP12M_GY	2240	5	UNSCP12M_CD	2156	5	UNSCP12M_CL	2153	5
16 Module Plastic Surround and Gridplate	UNSCP16M_WE	1568	5	UNSCP16M_GY	2705	5	UNSCP16M_CD	2919	5	UNSCP16M_CL	2919	5
18 Module Plastic Surround and Gridplate	UNSCP18M_WE	1625	1	UNSCP18M_GY	2888	1	UNSCP18M_CD	3128	1	UNSCP18M_CL	3128	1

Please contact Customer Care Center for Stockable and Non stockable status of references.


\*Bold references are MTO reference.

# Wiring Diagram Unica Pure

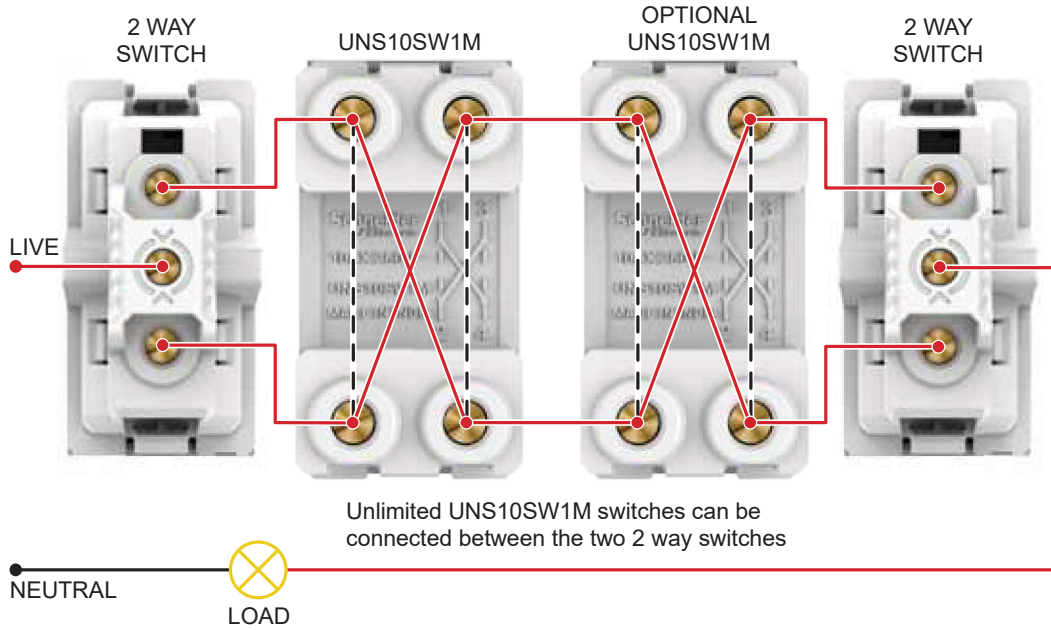


## > 10AX Intermediate Switch

UNS10SW1M\_WE, UNS10SW1M\_GY

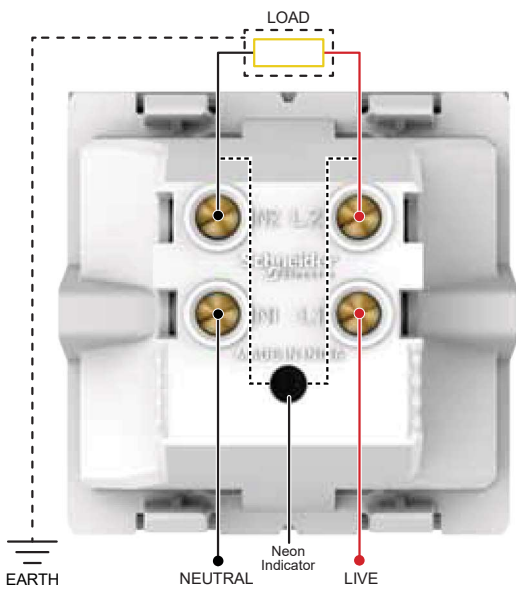

## > 20A Double Pole Switch With Indicator


UNS20DP2M\_WE, UNS20DP2M\_GY

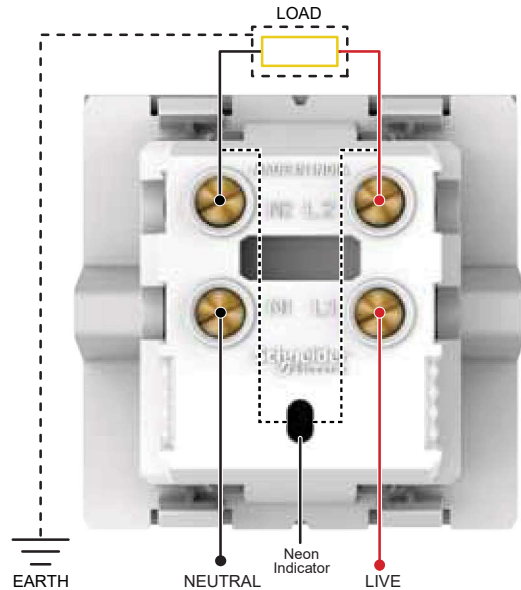

## > 32A Double Pole Switch With Indicator


UNS32DP2M\_WE, UNS32DP2M\_GY

# Wiring Diagram Unica Pure

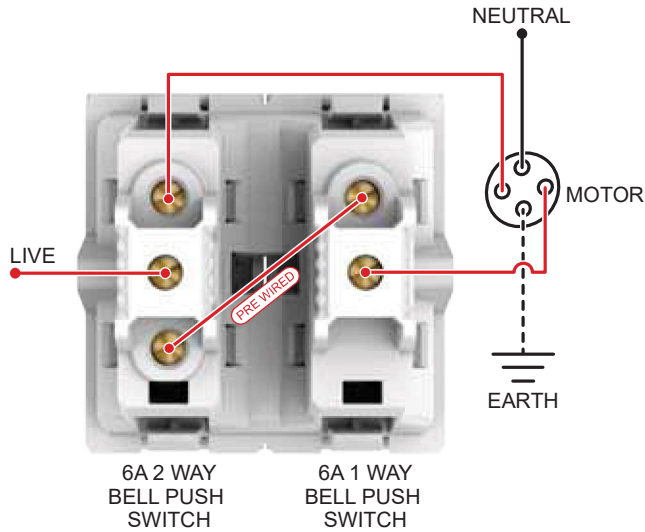


> Curtain Control Switch  
UNSCURTAINSW2M\_WE

1. Normal Operation

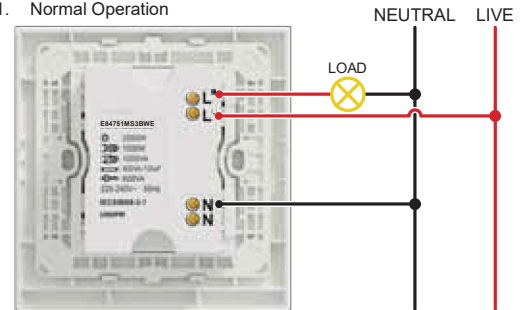


> PIR Motion Sensor\*  
UNSPIR\_WE

2. Two sensors control one load

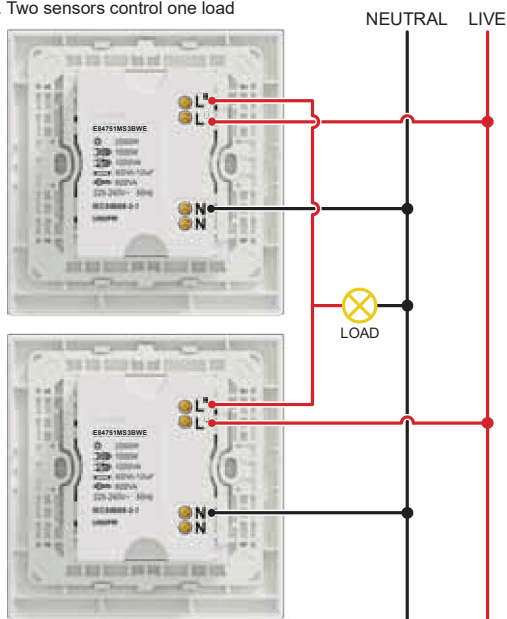


> PIR Motion Sensor\*  
UNSPIR\_WE

3. One sensors control staircase timer (set time knob to 1s)

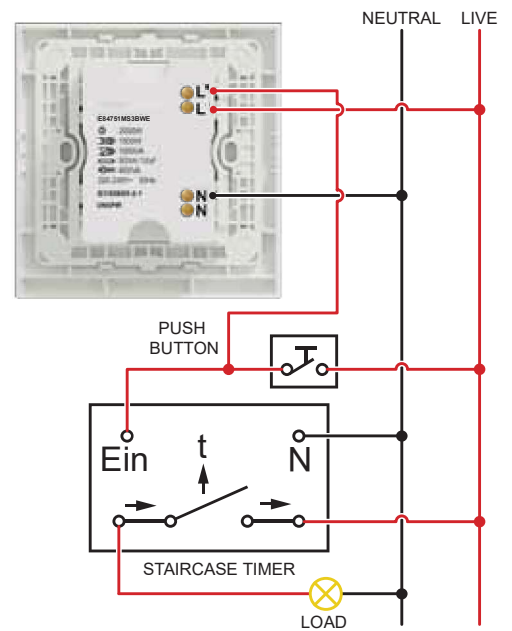


> PIR Motion Sensor\*  
UNSPIR\_WE

# Wiring Diagram Unica Pure

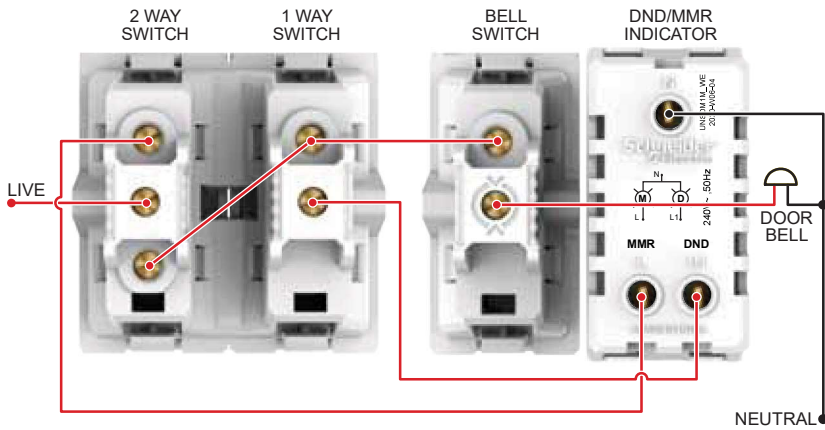


- > DND/MMR Indicator v.2
- > Do Not Disturb Switch
- > Make My Room Switch
- > DND Switch
- > MMR Switch

UNSDM1M\_WE, UNSDM1M\_GY, UNSDNDSW1M\_WE,  
UNSDNDSW1M\_GY, UNSMMSW1M\_WE, UNSMMSW1M\_GY

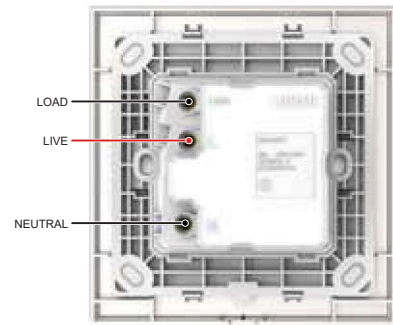

- > Unica Pure Key Card

UNSEKCSW\_WE, UNSEKCSW\_GY,  
UNSEKCSW\_CL, UNSEKCSW\_CD

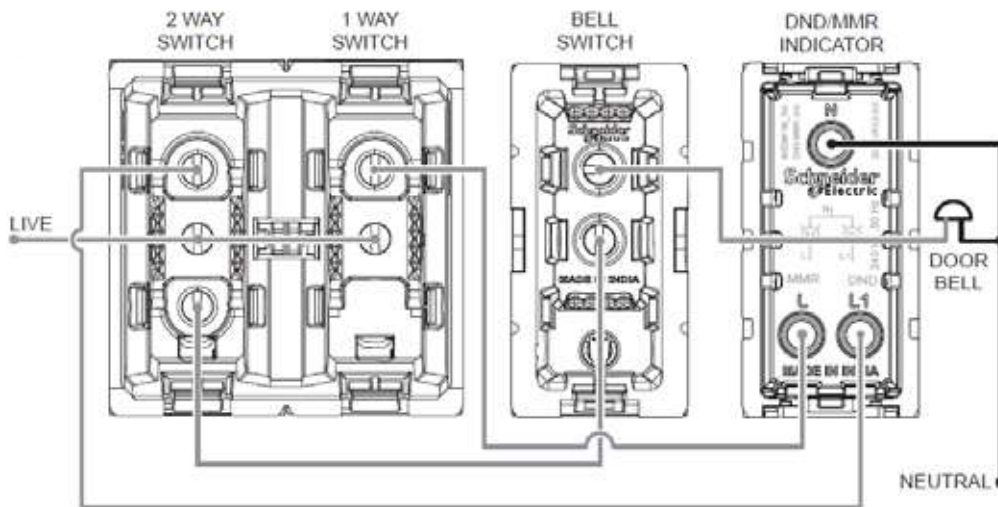

- > SW DNDMMR with interlock

UNSDNDMMRSW2M\_WE & UNSDNDMMRSW2M\_GY

# ZENcelo India - The Revolutionary Full-Flat Switch



- **World's First and only Full-Flat Mechanical Switch**
- **Patented Iso-Motion Technology** - Ensures switch stays in the same position whether On or Off
- **Robust & Strong** - Made of corrosion-resistant, heat-resistant and impact-resistant polycarbonate
- **Safe to Use** - Electric arc-encapsulated switches and Data Sockets with patented integrated shutter
- **Designed to Last** - Switches tested to 80,000 times; Sockets tested to 15,000 cycles.
- **Green & Eco Friendly** - RoHS compliant range
- **Dust Proof Cover**
- **All Dark Grey references covered with electrostatic protective film**
- **Intermediate switches to control multiple 2way switches**
- **16AX~20A 1 Way 2G Switch (1M) - IN8444/16: Single: switch to control two loads**



Description	Reference for White	Unit MRP [₹]	Pack	Reference for Dark Grey	Unit MRP [₹]	Pack
<b>Switches</b>						
6AX 1 Way switch	IN8401	451	10	IN8401(BZ)	565	10
6AX 1 Way switch (2M)	<b>IN8421</b>	810	10	<b>IN8421(BZ)</b>	959	10
6AX 2 Way switch	IN8402	565	10	IN8402(BZ)	679	10
6AX 1 Way switch with Neon	IN8481	725	10	IN8481(BZ)	868	10
16AX~20A 1 Way switch	IN8401/16	689	10	IN8401/16(BZ)	839	10
16AX~20A 1 Way switch (2M)	IN8421/16	1071	10	-	-	-
16AX~20A 1 Way switch with Neon	IN8481/16	989	10	IN8481/16(BZ)	1171	10
16AX~20A 1 Way switch with Neon (2M)	<b>IN8482/16</b>	1266	10	<b>IN8482/16(BZ)</b>	1504	10
16AX~20A 2 Way switch	IN8402/16	978	10	IN8402/16(BZ)	1268	10
16AX~20A 2 Way switch (2M)	IN8422/16	1171	10	IN8422/16(BZ)	1511	10
16AX~20A 1 Way 2G switch (1M)	IN8444/16	1126	10	IN8444/16(BZ)	1371	10
10AX Intermediate switch	IN8430/IM	1835	10	-	-	-
6A Momentary Switch	<b>IN8487</b>	907	10	<b>IN8487_BZ</b>	1070	-
20A DP Switch with Neon (2M)	IN8486/20	1508	5	IN8486/20(BZ)	2012	5
32A DP Switch with Neon (2M)	IN8486/32	2347	5	IN8486/32(BZ)	2873	5
<b>Motor Starter Switch</b>						
25A Motor Starter switch (2M)	IN8425MS	3933	10	IN8425MS(BZ)	4205	10
<b>Bell Push</b>						
6A Bell Push switch	IN8405	641	10	IN8405(BZ)	792	10
6A Bell Push switch (2M)	IN8425	1041	10	<b>IN8425(BZ)</b>	1262	10
6A Bell Push switch with Neon	IN8485	941	10	IN8485(BZ)	1109	10
6A Bell Push switch with Neon (2M)	IN8486	1101	10	IN8486(BZ)	1389	10
<b>Sockets</b>						
6A 3 PIN Socket Outlet with Shutter (BIS)	IN8426UNS	745	10	IN8426UNS_BZ	902	10
6A/16A 3 Pin Socket with Shutter	IN8426/16	1109	10	IN8426/16(BZ)	1358	10
<b>Fan Regulators &amp; Dimmers</b>						
Fan Control (5 Speeds)	IN84SFR	2712	5	IN84SFR(BZ)	3255	5
Full Flat 500W Dimmer Module (1 Gang)	IN8404D	2464	10	IN8404D(BZ)	2918	10
<b>USB Chargers</b>						
1 Gang USB Charger - 2.1A (1M)	IN8431USB_WE	4296	10	IN8431USB_BZ	4929	10
2.4A 5V A+C USB Charger (1M)	IN8431ACUSB_WE	4749	10	IN8431ACUSB_BZ	5443	10
<b>Accessories</b>						
RJ11 Telephone Outlet with shutter (1 Gang)	IN8431RJS4	733	10	IN8431RJS4(BZ)	903	10
RJ45 Cat6 Data Outlet with shutter	IN8431RJ6	2590	10	IN8431RJ6(BZ)	3163	10
TV Socket	IN8431TV	560	10	IN8431TV(BZ)	721	10
Foot Lamp with White LED (2M)	IN8490FLW	5223	10	-	-	-
Foot Lamp with Yellow LED (2M)	IN8490FLY	5093	10	-	-	-
Blank off unit (1M)	IN8430X	168	10	IN8430X(BZ)	207	10
Door Chime 230VAC 2M	INCHIME8488	2521	-	INCHIME8488_BZ	2820	-
<b>Hotel Series</b>						
Do Not Disturb Panel	<b>INH8451</b>	3962	10	INH8451(BZ)	4479	10
Make My Room Panel	<b>INH8454</b>	3703	10	INH8454(BZ)	4133	10
Do Not Disturb Switch	<b>INH8452</b>	1967	10	INH8452(BZ)	2171	10
Do Not Disturb Switch (2M)	-	0	-	<b>INH8453(BZ)</b>	2434	10
Make My Room Switch	<b>INH8455</b>	1922	10	INH8455(BZ)	2289	10

Please contact Customer Care Center for Stockable and Non stockable status of references.  
\*Bold references are MTO reference.

# ZENcelo India - The Revolutionary Full-Flat Switch




E8431EKT-OS




E84T727V>SZ-OS

Description	Reference for White	Unit MRP [₹]	Pack	Reference For Silver Bronze	Unit MRP [₹]	Pack
<b>Hotel Series</b>						
16A Electronic Key Card Time Delay Switch	E8431EKT-OS	14113		E8431EKT>SZ-OS	17643	1
Universal Shaver Unit, Vertical	-	-		E84T727V>SZ-OS	9946	1
Universal Shaver Unit, Horizontal	-	-		<b>E84T727H&gt;SZ-OS</b>	9946	1




IN8403C




IN8406C



IN8402C(BZ)



IN8404C(SZ)




IN84012C(SA)

Description	Reference for White	Unit MRP [₹]	Pack	Reference for Dark Grey	Unit MRP [₹]	Pack	Reference for Silver Bronze	Unit MRP [₹]	Pack	Reference for Satin Silver	Unit MRP [₹]	Pack
<b>Cover Plates</b>												
1M Grid & 1M Cover Frame	IN8401C	436	10	IN8401C(BZ)	532	10	IN8401C(SZ)	1250	10	<b>IN8401C(SA)</b>	1332	10
2M Grid & 2M Cover Frame	IN8402C	457	10	IN8402C(BZ)	558	10	IN8402C(SZ)	1237	10	IN8402C(SA)	1357	10
3M Grid & 3M Cover Frame	IN8403C	538	10	IN8403C(BZ)	658	10	IN8403C(SZ)	1521	10	IN8403C(SA)	1668	10
4M Grid & 4M Cover Frame	IN8404C	587	10	IN8404C(BZ)	773	10	IN8404C(SZ)	1827	10	IN8404C(SA)	2006	10
6M Grid & 6M Cover Frame	IN8406C	895	5	IN8406C(BZ)	1098	5	IN8406C(SZ)	2509	5	IN8406C(SA)	2779	5
8M Grid & 8M Cover Frame - Horizontal	IN8408HC	1074	5	IN8408HC(BZ)	1313	5	IN8408HC(SZ)	3422	5	IN8408HC(SA)	3755	5
8M Grid & 8M Cover Frame - Square	IN8408SC	1432	5	IN8408SC(BZ)	2025	5	-	-	-	<b>IN8408SC(SA)</b>	4559	5
9M Grid & 9M Cover Frame	<b>IN8409C</b>	1971	5	-	-	-	<b>IN8409C(SZ)</b>	5745	5	-	-	-
12M Grid & 12M Cover Frame	IN84012C	2375	5	IN84012C(BZ)	2990	5	IN84012C(SZ)	7725	5	<b>IN84012C(SA)</b>	8478	5
18M Grid & 18M Cover Frame	IN84018C	3350	5	IN84018C(BZ)	4426	5	IN84018C(SZ)	10225	5	<b>IN84018C(SA)</b>	11223	5


Please contact Customer Care Center for Stockable and Non stockable status of references.  
\*Bold references are MTO reference.

W.E.F. January 15<sup>th</sup>, 2026


# Wiring Diagram ZENcelo

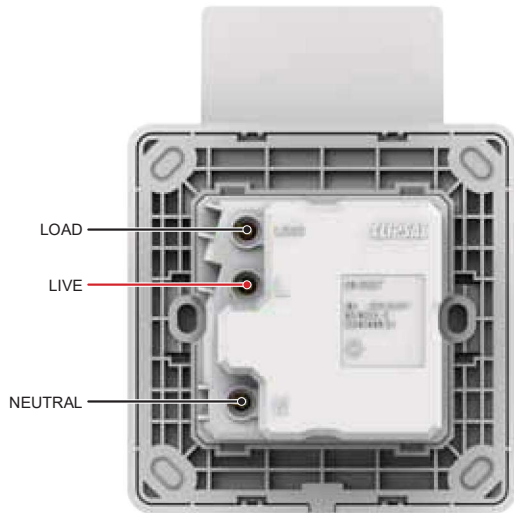


> 16A Electronic Key Card Time Delay  
E8431EKT-OS, E8431EKT>SZ-OS

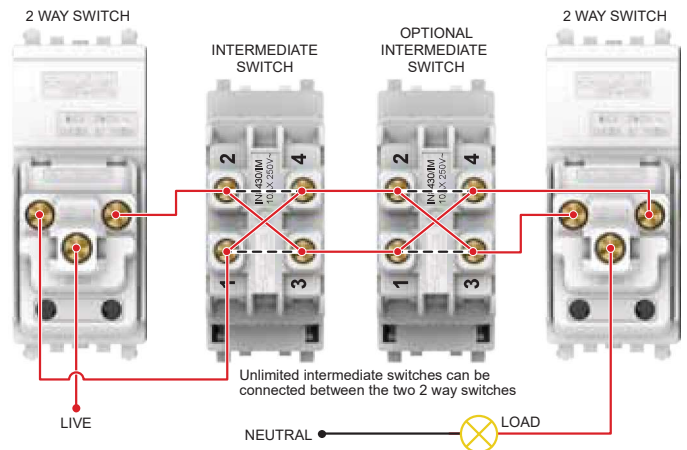


> 10AX Intermediate Switch  
IN8430/IM, IN8430/IM (BZ)

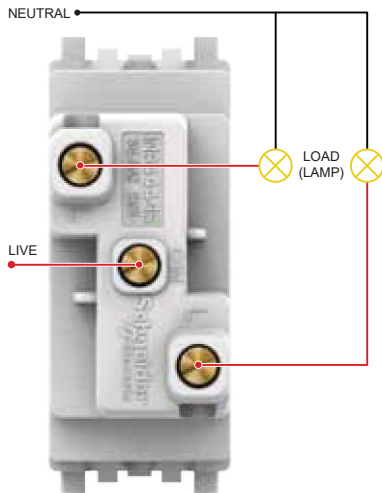

> 16AX~20A 1 Way 2G Switch (1M)  
IN8444/16, IN8444/16 (BZ)

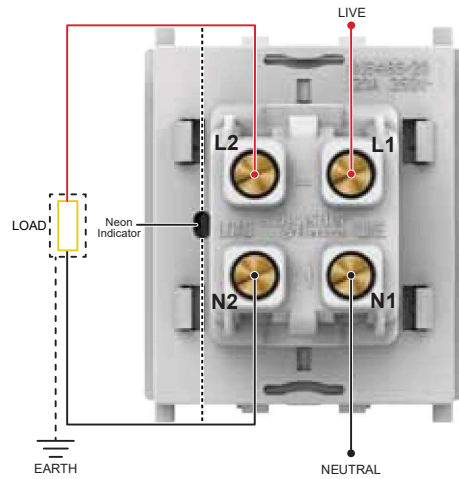


> 20A DP Switch with Neon (2M)  
IN8486/20, IN8486/20 (BZ)

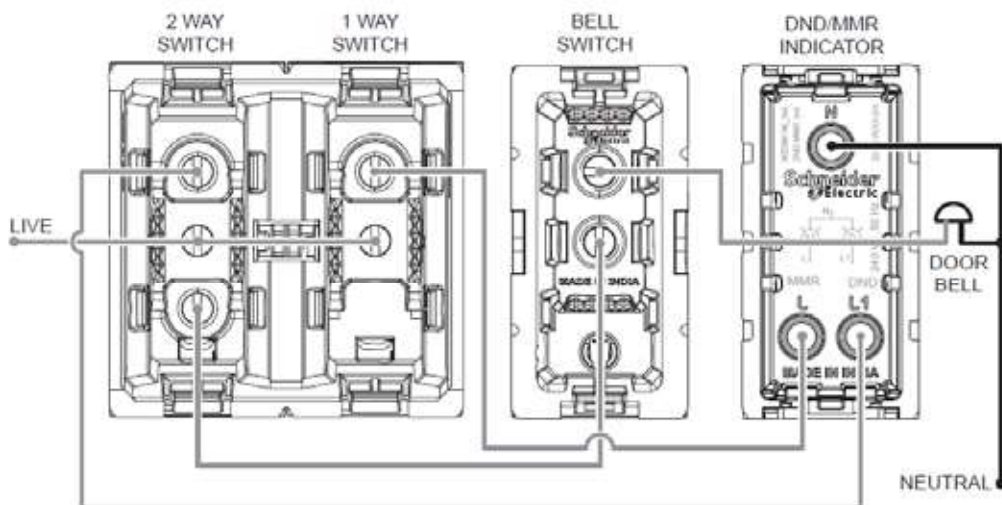


> SW DNDMMR White with interlock 2M  
INH8456\_WE & INH8456\_BZ

# Wiring Diagram ZENcelo

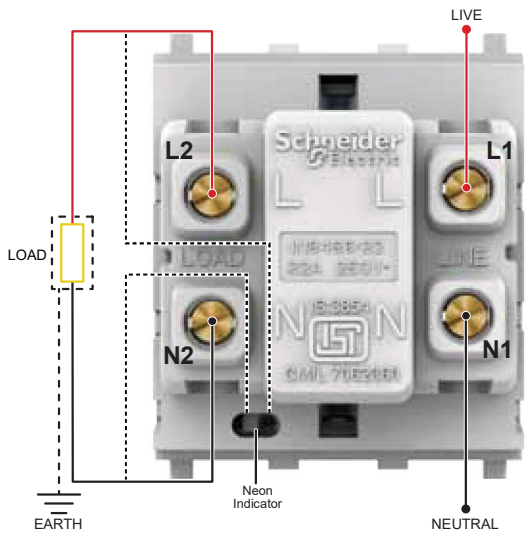


> 32A DP Switch with Neon (2M)

IN8486/32, IN8486/32 (BZ)

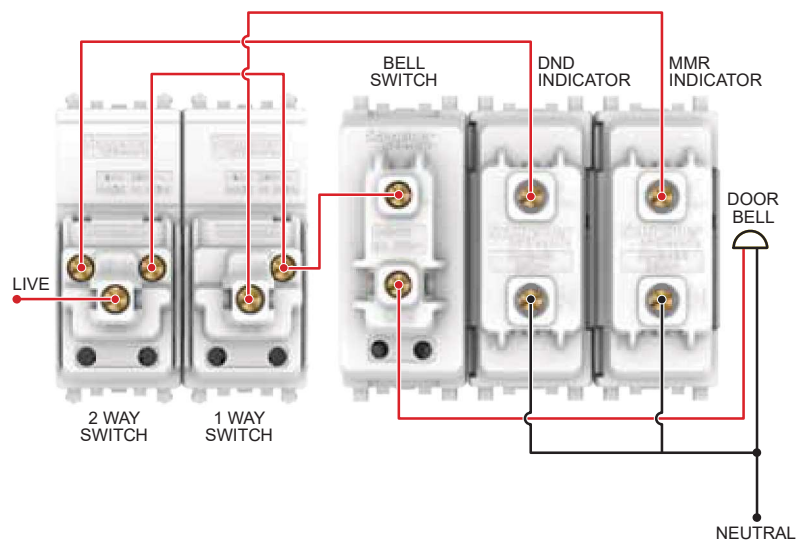

> Do Not Disturb Panel > Make My Room Panel  
> Do Not Distrub Switch > Make My Room Switch

INH8451, INH8451 (BZ), INH8454, INH8454 (BZ),  
INH8452, INH8452 (BZ), INH8455, INH8455 (BZ)

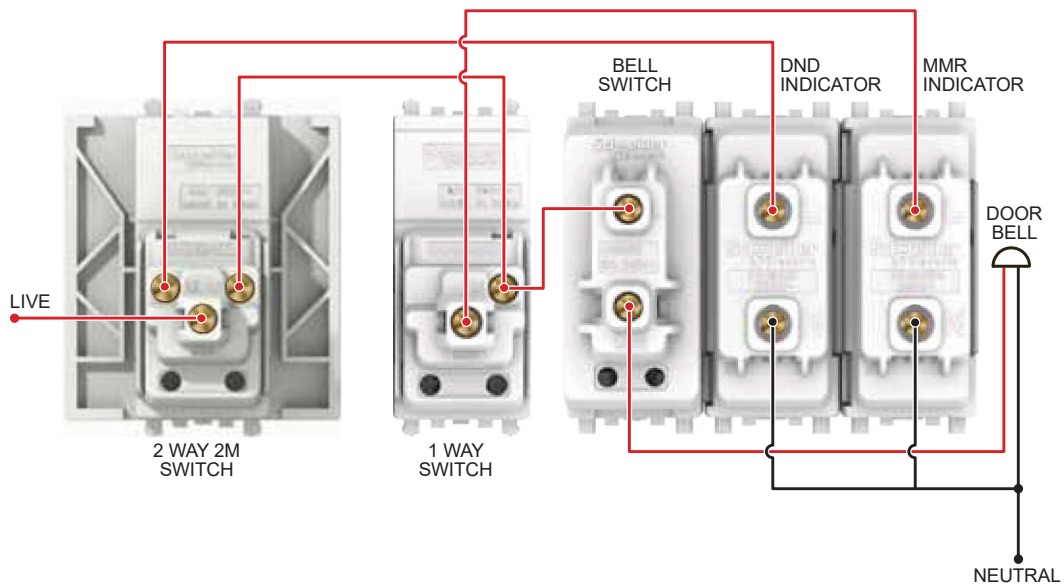

> Do Not Disturb Panel > Make My Room Panel  
> Do Not Disturb Switch (2M) > Make My Room Switch

INH8451, INH8451 (BZ), INH8454, INH8454 (BZ)  
INH8453 (BZ), INH8455, INH8455 (BZ)

# AvatarOn - It's also a Switch



White  
(WE)



Wine Gold  
(WG)



Dark Grey  
(DG)



Dark Wood  
(WD)



Gold Hairline  
(GH)



Light Wood  
(LW)



**Award-winning Designs:** In 2017, AvatarOn gained international recognition for its innovative design and quality excellence and was awarded the iF Design Award

### Ingenious Beauty

- The ground-breaking AvatarOn series is a true marriage of aesthetics and practicality, making it a perfect choice for all home or office designs.

### Safe and Reliable

- Our patented "Slim Rocker, Sure Click" SS technology not only gives AvatarOn a greater thinness overall, but also a near-zero contact jitter that reduces sparks, thus ensuring a safe and reliable use.

### Customisable Covers for True Adaptability

- AvatarOn switches are available in an array of replaceable covers for full customisation and integration into any home decor. The customised pattern covers of AvatarOn provides you with an extra canvas to showcase your creativity in a subtle yet apparent way.

### Modern Look

- The stylish and streamlined design of AvatarOn switch covers are finished in white, soft wood, dark wood and gold hairline materials for a classic look and universal elegance.

### Tech-chic Design that Shines

- The AvatarOn soft LED locators merges seamlessly with its sleek giant dolly, creating a stylish and streamlined design and glow with a soft luminescent in the dark, indicating the exact location of each switch at night.

### Multifunctional Accessories for Every Day Conveniences



E8331L1\_WE\_G8



E8331L1\_WD\_G8



E8331L1LED\_WE\_G8



E8331L1LED\_WD\_G8



E8331L2\_WE\_G8



E8331L2\_WD\_G8



E8332L1\_WE\_G8



E8332L1\_WD\_G8



E8332L2\_WE\_G8














E8332L2\_WD\_G8

Product Description	Color	Product Ref. No.	Unit MRP [₹]	Pack
<b>16A Switches (Base + Cover Plate)</b>				
16AX 250V 1 Gang 1 Way Switch	White	E8331L1_WE_G8	654	1
	Wine Gold	E8331L1_WG_G8	983	10
	Dark Grey	E8331L1_DG_G8	983	1
	Metal Gold Hairline	E8331L1_GH_G8	987	10
	Light Wood	<b>E8331L1_LW_G8</b>	1064	10
	Dark Wood	E8331L1_WD_G8	987	10
16AX 250V 1 Gang 1 Way Switch with LED Indicator	White	E8331L1LED_WE_G8	983	1
	Wine Gold	<b>E8331L1LED_WG_G8</b>	1470	10
	Dark Grey	<b>E8331L1LED_DG_G8</b>	1470	1
	Metal Gold Hairline	<b>E8331L1LED_GH_G8</b>	1477	10
	Light Wood	<b>E8331L1LED_LW_G8</b>	1736	10
	Dark Wood	<b>E8331L1LED_WD_G8</b>	1477	10
16AX 250V 1 Gang 2 Way Switch	White	E8331L2_WE_G8	676	1
	Wine Gold	E8331L2_WG_G8	1049	10
	Dark Grey	E8331L2_DG_G8	1049	1
	Metal Gold Hairline	<b>E8331L2_GH_G8</b>	1054	10
	Light Wood	<b>E8331L2_LW_G8</b>	1136	10
	Dark Wood	E8331L2_WD_G8	1054	10
16AX 250V 1 Gang 2 Way Switch with LED Indicator	White	<b>E8331L2LED_WE_G8</b>	1049	10
	Wine Gold	<b>E8331L2LED_WG_G8</b>	1575	10
	Dark Grey	<b>E8331L2LED_DG_G8</b>	1575	1
	Metal Gold Hairline	<b>E8331L2LED_GH_G8</b>	1583	10
	Light Wood	<b>E8331L2LED_LW_G8</b>	1860	10
	Dark Wood	<b>E8331L2LED_WD_G8</b>	1791	10
16AX 250V 2 Gang 1 Way Switch	White	E8332L1_WE_G8	1020	1
	Wine Gold	E8332L1_WG_G8	1531	10
	Dark Grey	E8332L1_DG_G8	1531	1
	Metal Gold Hairline	E8332L1_GH_G8	1546	10
	Light Wood	<b>E8332L1_LW_G8</b>	1612	10
	Dark Wood	E8332L1_WD_G8	1546	10
16AX 250V 2 Gang 1 Way Switch with LED Indicator	White	E8332L1LED_WE_G8	1531	1
	Wine Gold	<b>E8332L1LED_WG_G8</b>	2298	10
	Dark Grey	<b>E8332L1LED_DG_G8</b>	2298	1
	Metal Gold Hairline	<b>E8332L1LED_GH_G8</b>	2321	10
	Light Wood	<b>E8332L1LED_LW_G8</b>	2739	10
	Dark Wood	<b>E8332L1LED_WD_G8</b>	2321	10
16AX 250V 2 Gang 2 Way Switch	White	E8332L2_WE_G8	1242	1
	Wine Gold	E8332L2_WG_G8	1863	10
	Dark Grey	E8332L2_DG_G8	1863	1
	Metal Gold Hairline	E8332L2_GH_G8	1880	10
	Light Wood	<b>E8332L2_LW_G8</b>	2220	10
	Dark Wood	E8332L2_WD_G8	1880	10

Please contact Customer Care Center for Stockable and Non stockable status of references.

\*Bold references are MTO reference.

# AvatarOn - It's also a Switch

		Product Description	Color	Product Ref. No.	Unit MRP ₹	Pack	
<b>16A Switches (Base + Cover Plate)</b>							
	E8332L2LED_WE_G8	16AX 250V 2 Gang 2 Way Switch with LED Indicator	White	<b>E8332L2LED_WE_G8</b>	1863	10	
			Wine Gold	<b>E8332L2LED_WG_G8</b>	2796	10	
			Dark Grey	<b>E8332L2LED_DG_G8</b>	2796	1	
			Dark Wood	<b>E8332L2LED_WD_G8</b>	2823	10	
	E8333L1LED_WE_G8	16AX 250V 3 gang 1 Way Switch	White	E8333L1_WE_G8	1683	1	
			Wine Gold	E8333L1_WG_G8	2525	10	
			Dark Grey	E8333L1_DG_G8	2572	1	
			Metal Gold Hairline	E8333L1_GH_G8	2561	10	
	E8333L1LED_WE_G8	16AX 250V 3 gang 1 Way Switch with LED Indicator	Light Wood	<b>E8333L1_LW_G8</b>	2645	10	
			Dark Wood	E8333L1_WD_G8	2561	10	
			White	<b>E8333L1LED_WE_G8</b>	2525	10	
			Wine Gold	<b>E8333L1LED_WG_G8</b>	3785	10	
	E8333L2_WE_G8	16AX 250V 3 gang 2 Way Switch with LED Indicator	Dark Grey	<b>E8333L1LED_DG_G8</b>	3785	1	
			Metal Gold Hairline	<b>E8333L1LED_GH_G8</b>	3839	10	
			Light Wood	<b>E8333L1LED_LW_G8</b>	4489	10	
			Dark Wood	<b>E8333L1LED_WD_G8</b>	3839	10	
	E8333L2_WE_G8	16AX 250V 3 gang 2 Way Switch	White	E8333L2_WE_G8	1811	1	
			Wine Gold	E8333L2_WG_G8	2717	10	
			Dark Grey	E8333L2_DG_G8	2717	1	
			Metal Gold Hairline	E8333L2_GH_G8	2757	10	
	E8333L2LED_WE_G8	16AX 250V 3 gang 2 Way Switch with LED Indicator	Dark Wood	E8333L2_WD_G8	2757	10	
			White	<b>E8333L2LED_WE_G8</b>	2717	10	
			Wine Gold	<b>E8333L2LED_WG_G8</b>	4076	10	
			Dark Grey	<b>E8333L2LED_DG_G8</b>	4076	1	
	E8334L1_WE_G8	16AX 250V 4 Gang 1 Way Switch	Metal Gold Hairline	<b>E8333L2LED_GH_G8</b>	4134	10	
			Light Wood	<b>E8333L2LED_LW_G8</b>	4614	10	
			Dark Wood	<b>E8333L2LED_WD_G8</b>	4134	10	
			White	E8334L1_WE_G8	2420	1	
	E8334L1_WE_G8	16AX 250V 4 Gang 1 Way Switch with LED Indicator	Wine Gold	E8334L1_WG_G8	3632	10	
			Dark Grey	E8334L1_DG_G8	3632	1	
			Metal Gold Hairline	E8334L1_GH_G8	3683	10	
			Light Wood	<b>E8334L1_LW_G8</b>	3805	10	
	E8334L1LED_WE_G8	16AX 250V 4 Gang 2 Way Switch with LED Indicator	Dark Wood	E8334L1_WD_G8	3683	10	
			White	E8334L1LED_WE_G8	3632	10	
			Wine Gold	<b>E8334L1LED_WG_G8</b>	5446	10	
			Dark Grey	<b>E8334L1LED_DG_G8</b>	5446	1	
	E8334L2_WE_G8	16AX 250V 4 Gang 2 Way Switch	Metal Gold Hairline	<b>E8334L1LED_GH_G8</b>	5524	10	
			Light Wood	<b>E8334L1LED_LW_G8</b>	6460	10	
			Dark Wood	<b>E8334L1LED_WD_G8</b>	5524	10	
			White	E8334L2_WE_G8	2784	1	
	E8334L2LED_WE_G8	16AX 250V 4 Gang 2 Way Switch with LED Indicator	Wine Gold	E8334L2_WG_G8	4174	10	
			Dark Grey	E8334L2_DG_G8	4254	1	
			Metal Gold Hairline	E8334L2_GH_G8	4235	10	
			Dark Wood	E8334L2_WD_G8	4235	10	
	E8334L2LED_WE_G8	16AX 250V 4 Gang 2 Way Switch with LED Indicator	White	<b>E8334L2LED_WE_G8</b>	4174	10	
			Wine Gold	<b>E8334L2LED_WG_G8</b>	6263	10	
			Dark Grey	<b>E8334L2LED_DG_G8</b>	6263	1	
				Metal Gold Hairline	<b>E8334L2LED_GH_G8</b>	6352	10

Please contact Customer Care Center for Stockable and Non stockable status of references.  
\*Bold references are MTO reference.

# AvatarOn - It's also a Switch



E8331M\_WE\_G8



E8331PRL1\_WD\_G8



E8332PRL1\_WE\_G8



E8332PRL1\_WD\_G8



E8331D20N\_WE\_G8



E8331D20N\_WD\_G8



E8331D32N\_WE\_G8



E8332D20N\_WD\_G8



E8331D32N\_WD\_G8












E8331D45N\_WD\_G8

Product Description	Color	Product Ref. No.	Unit MRP ₹	Pack
<b>16A Intermediate Switches</b>				
16AX 250V 1 Gang Intermediate Switch	White	<b>E8331M_WE_G8</b>	2251	1
	Wine Gold	<b>E8331M_WG_G8</b>	3376	1
	Dark Grey	<b>E8331M_DG_G8</b>	3376	1
<b>10A Momentary Switches</b>				
10A 250V 1 Gang Momentary Switch	Dark Wood	<b>E8331PRL1_WD_G8</b>	1203	10
	White	<b>E8332PRL1_WE_G8</b>	1010	10
	Wine Gold	<b>E8332PRL1_WG_G8</b>	1512	10
	Dark Grey	<b>E8332PRL1_DG_G8</b>	1512	1
	Metal Gold Hairline	<b>E8332PRL1_GH_G8</b>	1512	10
10A 250V 2 Gang Momentary Switch	Dark Wood	<b>E8332PRL1_WD_G8</b>	1512	10
	Dark Wood	<b>E8332PRL1_WD_G8</b>	1512	10
<b>Double Pole Switches</b>				
20A 250V 1 Gang Double Pole Switch with LED Indicator	White	E8331D20N_WE_G8	1732	10
	Wine Gold	E8331D20N_WG_G8	2594	10
	Dark Grey	E8331D20N_DG_G8	2594	1
	Metal Gold Hairline	E8331D20N_GH_G8	2619	10
	Light Wood	<b>E8331D20N_LW_G8</b>	2548	10
	Dark Wood	E8331D20N_WD_G8	2619	10
20A 250V 2 Gang Double Pole Switch with LED Indicator	White	E8332D20N_WE_G8	2205	10
	Wine Gold	E8332D20N_WG_G8	3114	10
	Dark Grey	E8332D20N_DG_G8	3114	1
	Metal Gold Hairline	E8332D20N_GH_G8	3144	10
	Dark Wood	E8332D20N_WD_G8	3144	10
32A 250V 1 Gang Double Pole Switch with LED Indicator	White	E8331D32N_WE_G8	2297	10
	Wine Gold	E8331D32N_WG_G8	3445	10
	Dark Grey	E8331D32N_DG_G8	3445	1
	Metal Gold Hairline	E8331D32N_GH_G8	3477	10
	Light Wood	E8331D32N_LW_G8	3477	10
	Dark Wood	E8331D32N_WD_G8	3477	10
45A 250V 1 Gang Double Pole Switch with LED Indicator	Wine Gold	E8331D45N_WG_G8	4307	10
	Dark Grey	E8331D45N_DG_G8	4385	1
	Metal Gold Hairline	E8331D45N_GH_G8	4427	10
	Dark Wood	E8331D45N_WD_G8	4150	10

Please contact Customer Care Center for Stockable and Non stockable status of references.  
\*Bold references are MTO reference.

# AvatarOn - It's also a Switch

		Product Description	Color	Product Ref. No.	Unit MRP [₹]	Pack
<b>Bell Push Switch</b>						
 <b>E8331BPL1_WE_G8</b>	 <b>E8331BPL1_WD_G8</b>	10A 250V Door Bell Push Switch	White	E8331BPL1_WE_G8	733	1
			Wine Gold	E8331BPL1_WG_G8	1102	10
			Dark Grey	E8331BPL1_DG_G8	1097	1
			Metal Gold Hairline	E8331BPL1_GH_G8	1113	10
			Light Wood	<b>E8331BPL1_LW_G8</b>	1123	10
			Dark Wood	E8331BPL1_WD_G8	1113	10
<b>Sockets</b>						
 <b>E8315_6_NS_WE</b>	 <b>E8315_6_NS_WD</b>	6A 2/3 Pin Switched Socket	White	E8315_6_NS_WE	1459	8
			Wine Gold	E8315_6_NS_WG	1890	8
			Dark Grey	E8315_6_NS_DG	1855	1
			Metal Gold Hairline	E8315_6_NS_GH	1873	8
			Light Wood	E8315_6_NS_LW	1944	8
			Dark Wood	E8315_6_NS_WD	1873	8
 <b>E8331FR350_WE_G8</b>	 <b>E8331FR350_WD_G8</b>	6/16A Switched Socket	White	E8315_16_WE	1831	8
			Wine Gold	E8315_16_WG	2328	8
			Dark Grey	E8315_16_DG	2328	1
			Metal Gold Hairline	E8315_16_GH	2395	8
			Light Wood	<b>E8315_16_LW</b>	2440	8
			Dark Wood	E8315_16_WD	2351	8
<b>Fan Regulators</b>						
 <b>E8331_WE</b>	 <b>E8331_WD</b>	5 Steps 360 Deg Fan Regulator	White	E8331FR350_WE_G8	3476	1
			Wine Gold	E8331FR350_WG_G8	4582	1
			Dark Grey	E8331FR350_DG_G8	4582	1
			Metal Gold Hairline	E8331FR350_GH_G8	4582	1
			Light Wood	<b>E8331FR350_LW_G8</b>	4890	1
			Dark Wood	E8331FR350_WD_G8	4582	1
<b>Switch &amp; Socket Covers (Additional)</b>						
 <b>E8331_WE</b>	 <b>E8331_WD</b>	1 Gang Switch Cover	White	<b>E8331_WE</b>	199	1
			Wine Gold	<b>E8331_WG</b>	551	1
			Metal Gold Hairline	<b>E8331_GH</b>	667	1
			Dark Wood	<b>E8331_WD</b>	551	1
 <b>E8331KH_WE</b>	 <b>E8332_WD</b>	1 Gang Switch Cover with Keyholder	White	<b>E8331KH_WE</b>	462	1
			Dark Wood	<b>E8332_WD</b>	300	1
 <b>E8332_WE</b>	 <b>E8333_WE</b>	2 Gang Switch Cover	White	<b>E8332_WE</b>	300	1
			Wine Gold	<b>E8332_WG</b>	752	1
			Metal Gold Hairline	<b>E8332_GH</b>	752	1
			Light Wood	<b>E8332_LW</b>	755	1
			Dark Wood	<b>E8332_WD</b>	752	1
 <b>E8332_WE</b>	 <b>E8333_WE</b>	3 Gang Switch Cover	White	<b>E8333_WE</b>	464	1
			Wine Gold	<b>E8333_WG</b>	1105	1
			Metal Gold Hairline	<b>E8333_GH</b>	1105	1
			Light Wood	<b>E8333_LW</b>	1084	1

Please contact Customer Care Center for Stockable and Non stockable status of references.  
 \*Bold references are MTO reference.

# AvatarOn - It's also a Switch



E8334\_WE



E8334\_WD



E8315C\_6\_NC\_WE



E8315C\_6\_NC\_WD



E8332USB\_WE\_G8



E8315C\_16\_WD



E8332ACQUSB\_WE




E8332USB\_WD\_G8



E8331\_26\_WE



E8331\_36\_WE



E8331\_46\_WE



E8330TX\_WE

Product Description	Color	Product Ref. No.	Unit MRP ₹	Pack
4G Switch Cover	White	<b>E8334_WE</b>	726	1
	Wine Gold	<b>E8334_WG</b>	1356	1
	Dark Grey	<b>E8334_DG</b>	1295	1
	Metal Gold Hairline	<b>E8334_GH</b>	1506	1
	Light Wood	<b>E8334_LW</b>	1480	1
	Dark Wood	<b>E8334_WD</b>	1356	1
6A 2/3 Pin Switched Socket Cover	White	E8315C_6_NC_WE	518	12
	Wine Gold	E8315C_6_NC_WG	878	12
	Dark Grey	E8315C_6_NC_DG	878	1
	Metal Gold Hairline	E8315C_6_NC_GH	878	12
	Light Wood	E8315C_6_NC_LW	1014	12
	Dark Wood	E8315C_6_NC_WD	878	12
16A 2/3 Pin Switched Socket Cover	Wine Gold	<b>E8315C_16_WG</b>	918	12
	Dark Grey	<b>E8315C_16_DG</b>	918	1
	Metal Gold Hairline	<b>E8315C_16_GH</b>	1019	12
	Light Wood	<b>E8315C_16_LW</b>	1011	12
USB Chargers	Dark Wood	<b>E8315C_16_WD</b>	1019	12
	White	<b>E8332USB_WE_G8</b>	8716	1
	Wine Gold	<b>E8332USB_WG_G8</b>	13075	1
	Dark Grey	<b>E8332USB_DG_G8</b>	13075	1
	Metal Gold Hairline	<b>E8332USB_GH_G8</b>	13075	1
	Light Wood	<b>E8332USB_LW_G8</b>	15496	1
2 x 2.1A USB Charger with Mobile Holder (2.1A with 2 outputs used simultaneously)	Dark Wood	<b>E8332USB_WD_G8</b>	13075	1
	Metal Gold Hairline	E8332ACQUSB_GH	7933	-
	Light Wood	<b>E8332ACQUSB_LW</b>	8503	-
	Dark Wood	E8332ACQUSB_WD	7933	-
	White	E8332ACQUSB_WE	6413	-
	Wine Gold	E8332ACQUSB_WG	7933	-
<b>Bracket/Frame (to ensure alignment of switches on 2/3/4 Gang metal box)</b>				
2 Gang Bracket/Frame	White	E8331_26_WE	329	1
	Wine Gold	E8331_26_WG	431	1
	Dark Grey	E8331_26_DG	410	1
3 Gang Bracket/Frame	White	E8331_36_WE	362	1
	Wine Gold	E8331_36_WG	507	1
	Dark Grey	E8331_36_DG	484	1
4 Gang Bracket/ Frame	White	E8331_46_WE	387	1
	Wine Gold	E8331_46_WG	544	1
	Dark Grey	E8331_46_DG	519	1
<b>Blank Plates</b>				
1 Gang Blank Plate	White	E8330X_WE	442	1
	Wine Gold	E8330X_WG	664	1
	Dark Grey	E8330X_DG	664	1
	Metal Gold Hairline	E8330X_GH	695	1
	Dark Wood	E8330X_WD	695	1
2 Gang Blank Plate	White	<b>E8330TX_WE</b>	617	10
	Wine Gold	<b>E8330TX_WG</b>	958	10
	Dark Grey	<b>E8330TX_DG</b>	958	1
	Metal Gold Hairline	<b>E8330TX_GH</b>	1606	10

Please contact Customer Care Center for Stockable and Non stockable status of references.

\*Bold references are MTO reference.

# AvatarOn - It's also a Switch



E8331BPDMW\_WE\_G8



E8331KPB\_WE



E8332C\_WE\_G8



E8332C\_WD\_G8



E83T727V\_WE



E83T727V\_WD



E8331RJS4\_WE



E8331RJS4\_WD

Product Description	Color	Product Ref. No.	Unit MRP [₹]	Pack
<b>Hotel Series</b>				
DND, PCU, PW Indicator with Bell Switch (Do Not Disturb, Please Clean Up, Please Wait)	White	<b>E8331BPDMW_WE_G8</b>	6347	1
	Wine Gold	<b>E8331BPDMW_WG_G8</b>	9520	10
	Dark Grey	<b>E8331BPDMW_DG_G8</b>	9520	1
16AX 3 Gang Switch with PCU, DND, PW Sym (Do Not Disturb, Please Clean Up, Please Wait)	White	<b>E8333DMWS_WE_G8</b>	6041	1
	Wine Gold	<b>E8333DMWS_WG_G8</b>	8814	10
	Dark Grey	<b>E8333DMWS_DG_G8</b>	9233	1
	Dark Wood	<b>E8333DMWS_WD_G8</b>	9405	10
250V 16A Electronic Keycard Switch	White	E8331EKT_WE	11299	1
	Wine Gold	E8331EKT_WG	16950	1
	Dark Grey	E8331EKT_DG	16949	1
Panic Button with Key Reset	Dark Wood	<b>E8331EKT_WD</b>	17756	1
	White	<b>E8331KPB_WE</b>	2064	1
	Wine Gold	<b>E8331KPB_WG</b>	3033	1
10A 2 Gang Mechanical Curtain Switch	Dark Grey	<b>E8331KPB_DG</b>	2607	1
	White	E8332C_WE_G8	1315	1
	Wine Gold	<b>E8332C_WG_G8</b>	1973	10
	Dark Grey	E8332C_DG_G8	1973	1
	Metal Gold Hairline	<b>E8332C_GH_G8</b>	1973	10
115/240V 20VA Universal Version Shaver	Light Wood	<b>E8332C_LW_G8</b>	2193	10
	Dark Wood	<b>E8332C_WD_G8</b>	1973	10
	White	<b>E83T727V_WE</b>	6271	1
	Wine Gold	<b>E83T727V_WG</b>	10157	1
	Dark Grey	<b>E83T727V_DG</b>	10643	1
<b>Connection Units</b>	Metal Gold Hairline	<b>E83T727V_GH</b>	10643	1
	Dark Wood	<b>E83T727V_WD</b>	11149	1
	Wine Gold	<b>E8331DFSGN_WG</b>	5563	10
25A 250V 1 Gang Connection Unit	Metal Gold Hairline	<b>E8331TB_GH</b>	2472	10
<b>Telecom, Network, Connectivity &amp; Media Series</b>				
1 Gang Telephone Socket, Shuttered Wallplate	White	E8331RJS4_WE	977	1
	Wine Gold	E8331RJS4_WG	1629	1
	Dark Grey	E8331RJS4_DG	1629	1
	Metal Gold Hairline	E8331RJS4_GH	1629	1
	Light Wood	E8331RJS4_GH	1629	1
	Dark Wood	E8331RJS4_WD	1629	1

Please contact Customer Care Center for Stockable and Non stockable status of references.  
\*Bold references are MTO reference.

# AvatarOn - It's also a Switch



E8332RJS4\_WE



E8331RJS5\_WE



E8332RJS5\_WE



E8331RJS6\_WE



E8332RJS6\_WE



E8331TV\_WE



E8331TVSF\_WE



E8332TDRJS5\_WE



E8332TVRJS5\_WE



E8332HDUSB\_WE



E8332HDHD\_WE



E8331RJS\_WE



E8332RJS\_WE

Product Description	Color	Product Ref. No.	Unit MRP [₹]	Pack
2G Tel Socket, Shuttered Wallplate	White	<b>E8332RJS4_WE</b>	2397	1
	Wine Gold	<b>E8332RJS4_WG</b>	3600	1
1 Gang RJ45 Data Cat5E, Shuttered	White	E8331RJS5_WE	1527	1
	Wine Gold	E8331RJS5_WG	2664	1
	Dark Grey	<b>E8331RJS5_DG</b>	2542	1
	Metal Gold Hairline	E8331RJS5_GH	2542	1
	Dark Wood	<b>E8331RJS5_WD</b>	2664	1
2 Gang RJ45 Data Cat5E, Shuttered	White	<b>E8332RJS5_WE</b>	2792	1
	Wine Gold	<b>E8332RJS5_WG</b>	4656	1
	Dark Grey	<b>E8332RJS5_DG</b>	4444	1
1 Gang RJ45 Data Cat6, Shuttered	Metal Gold Hairline	<b>E8332RJS5_GH</b>	4444	10
	White	E8331RJS6_WE	1825	1
	Wine Gold	E8331RJS6_WG	2736	1
2 Gang RJ45 Data Cat6, Shuttered	Dark Grey	E8331RJS6_DG	2736	1
	White	<b>E8332RJS6_WE</b>	3419	1
	Wine Gold	<b>E8332RJS6_WG</b>	5130	1
1 Gang TV Socket, 75Ω, Through-Connect	Dark Grey	<b>E8332RJS6_DG</b>	5130	1
	White	E8331TV_WE	770	1
	Wine Gold	<b>E8331TV_WG</b>	1283	1
	Dark Grey	<b>E8331TV_DG</b>	1283	1
	Metal Gold Hairline	<b>E8331TV_GH</b>	1283	10
1 Gang TV Socket, Slave 5-1000	Dark Wood	<b>E8331TV_WD</b>	1283	1
	White	<b>E8331TVSF_WE</b>	851	10
	Wine Gold	<b>E8331TVSF_WG</b>	1426	0
1 Gang Tel + RJ45 Data Cat5E, Shuttered	Dark Grey	<b>E8331TVSF_DG</b>	1359	1
	White	E8332TDRJS5_WE	2397	1
	Wine Gold	E8332TDRJS5_WG	3997	1
	Dark Grey	E8332TDRJS5_DG	3816	1
	Metal Gold Hairline	<b>E8332TDRJS5_GH</b>	3816	1
1 Gang TV+ RJ45 Data Cat5E, Shuttered	Dark Wood	<b>E8332TDRJS5_WD</b>	3997	1
	White	<b>E8332TVRJS5_WE</b>	2973	1
	Wine Gold	<b>E8332TVRJS5_WG</b>	4961	1
	Dark Grey	<b>E8332TVRJS5_DG</b>	4734	1
	Metal Gold Hairline	<b>E8332TVRJS5_GH</b>	4734	1
1 Gang TV+ RJ45 Data Cat6, Shuttered	Dark Wood	<b>E8332TVRJS5_WD</b>	5512	1
	White	<b>E8332TVRJS6_WE</b>	2973	1
	Wine Gold	<b>E8332TVRJS6_WG</b>	4961	1
HDMI + USB Socket	Dark Grey	<b>E8332TVRJS6_DG</b>	4734	1
	White	<b>E8332HDUSB_WE</b>	6336	1
	Wine Gold	<b>E8332HDUSB_WG</b>	10559	8
2 Gang HDMI+HDMI, Keystone on Wallplate	Dark Grey	<b>E8332HDUSB_DG</b>	10078	1
	White	<b>E8332HDHD_WE</b>	3475	1
Volume Control, 5W, 8Ohm	Wine Gold	<b>E8331VC_WG</b>	4187	10
	Dark Grey	<b>E8331VC_DG</b>	4187	1
1 Gang S Keystone Wallplate (w/o Mod)	White	<b>E8331RJS_WE</b>	770	10
	Wine Gold	<b>E8331RJS_WG</b>	1155	10
	Dark Grey	<b>E8331RJS_DG</b>	1155	1
2 Gang S Keystone Wallplate (w/o Mod)	White	<b>E8332RJS_WE</b>	1408	10
	Wine Gold	<b>E8332RJS_WG</b>	2111	10
	Dark Grey	<b>E8332RJS_DG</b>	2111	1

Please contact Customer Care Center for Stockable and Non stockable status of references.  
\*Bold references are MTO reference.

# Kavacha - Weather Protected Series



CSW110-GY-EX



A3031WBP\_WE

- Pleasing looks with **IP56 protection**
- Large press switch
- Co-moulded sealing with no risk of gasket damage
- Chemical resistant & UV stabilised

Description	Reference	Unit MRP [₹]	Pack
<b>Kavacha IP56 Surface Mount Switches</b>			
<b>Switches with Looping Terminal</b>			
10A 1 Gang 2 Way Switch	<b>CSW110-GY-EX</b>	4397	1
10A 1 Gang 2 Way Bell Press Return Switch	<b>CSW110BPR-GY-EX</b>	4827	1
<b>Kavacha Heavy Duty Isolator Switches</b>			
35A Triple Pole	<b>WHT35-GY-EX</b>	9376	1
63A Triple Pole	<b>WHT63-GY-EX</b>	12075	1
<b>Kavacha IP56 Surface Mount Combined Switched Socket Outlets</b>			
<b>Combination Switch Socket Outlets</b>			
16A Single Pole Switched Socket Outlet	<b>CSC316RP_GY</b>	4872	1
<b>Kavacha IP56 Surface Mount Socket Outlets</b>			
16A Socket Outlet	<b>CSO316RP-GY-EX</b>	3442	1
<b>Kavacha Full-Time Weatherproof Cover</b>			
Full-Time Weatherproof Single Gang Socket Cover (Transparent) IP55	<b>E223R_TR</b>	1246	1
Weatherproof Bell Press Grey	<b>A3031WBP_GY</b>	1903	1
Weatherproof Bell Press White	<b>A3031WBP_WE</b>	1663	1

Please contact Customer Care Center for Stockable and Non stockable status of references.  
\*Bold references are MTO reference.

# Metal Boxes



- **Weld free design** to minimize corrosion and rusting without compromising on strength
- Mounting clip and earth pin designed for **easier installation** and to **avoid loss during transportation**
- Removable side plates and optimized knock outs and for **easier wiring**
- Completely tested & validated as per **IS 14772**

Description	Reference	Unit MRP ₹	Pack
<b>Metal Boxes for Indian Format Ranges (Livia, Opale, Clipsal X, Unica Pure &amp; ZENcelo India)</b>			
<b>0.8 mm thickness</b>			
Metal Box 1 & 2 modules	ME0102	117	20
Metal Box 3 modules	ME0103	153	20
Metal Box 4 modules	ME0104	176	20
<b>1 mm thickness</b>			
Metal Box 1 & 2 modules	MR1102	131	20
Metal Box 3 modules	MR1103	173	20
Metal Box 4 modules	MR1104	199	20
Metal Box 6 modules	MR1106	271	10
Metal Box 8 modules - Horizontal	MR1108	351	10
Metal Box 8 modules - Square	MR1109	351	10
Metal Box 12 module	MR1112	451	5
Metal Box 18 modules	MR1118	536	5

Description	Reference	Unit MRP ₹	Pack
<b>Metal Boxes for BS Format Ranges (AvatarON) - New &amp; Improved Design</b>			
<b>Use Bracket/Frame to ensure alignment of switches on 2/3/4 Gang Metal Box (refer to AvatarOn section for references)</b>			
<b>1 mm thickness</b>			
2 GANG GI Metal Boxes	MM1102	329	20
3 GANG GI Metal Boxes	MM1103	466	20
4 GANG GI Metal Boxes	MM1104	603	20

- Special Metal Box with Gang Partition to accommodate BS format ranges
- Single Metal Box can accommodate up to 4 units
- Number of Gangs for Metal Box = Number of units that it can accommodate (Eg. 3 GANG Metal Box can accommodate up to 3 BS format Units)

Please contact Customer Care Center for Stockable and Non stockable status of references.  
\*Bold references are MTO reference.

# Make your home **Smart** and **Sustainable** with **Wiser**



Enhance comfort and optimize energy usage, easily!

Live Smart, Be Energy Wise.

SE Ref.	Description of reference	Unit MRP [₹]
CS16A1MSW_WE*	16A 1M Connected Switch, White	7200
CD4SFR2M_WE*	4 Step Connected Fan Regulator, White	7500
CS16A1MSW_GY*	16A 1M Connected Switch, Grey	9450
CD4SFR2M_GY*	4 Step Connected Fan Regulator, Grey	9700
ENMOD1P*	Energy Monitoring Device, Single Phase	On Request
CCIRC1M*	IR Controller - WiFi	On Request
GR2CHRLYPG*	2 Channel Relay Puck - WiFi	On Request
IH11000200*	2 Channel Curtain Controller	On Request
IH12000020*	2 Channel Dimmer Controller	On Request
B1GTEWY*	Multi Protocol Gateway	On Request
IH100WFVDP*	Smart Doorbell	On Request
IH101ZW2IR*	ZW_IR Controller	On Request
IH101ZWIFI*	Automation Gateway	On Request
IH1200010F*	Fan Speed Controller	On Request
IH14000100*	4 Channel Automation Relay	On Request

Please contact Customer Care Center for Stockable and Non stockable status of references.

\*Bold references are MTO reference.

# Surface and Flush Mount Occupancy Sensors



## PIR, Ultrasonic Sensors & High Frequency sensor suitable for both Surface & Flush Mount

Description	Reference	Unit MRP [₹]
Surface Mount Single-Load 360 degrees PIR	CSS54E_WE	4099
Flush/Surface Mount Single-Load 360 degrees PIR	SAE-UE-MS-CSAWE	4944
ARGUS Presence Dual-Tech PIR & Ultrasonic Sensor - 1ch	<b>CCT551011</b>	16263
ARGUS Presence Dual-Tech PIR & Ultrasonic Sensor - 2ch	<b>CCT551012</b>	17472
ARGUS IR Remote Controller Dual-Tech	<b>CCT556011</b>	23596
ARGUS Presence High Frequency High Bay Sensor - 2ch	<b>CCT551023</b>	19121
ARGUS IR Remote Controller HF	<b>CCT556023</b>	21631
ARGUS Presence Wide Sense - 2ch	<b>CCT551003</b>	16190
INFRASCAN OUTDOOR 3WIRE 10A	<b>750WPR-GY</b>	25305
INFRASCAN INDOOR 3WIRE 10A	<b>751R-WE</b>	14682
INFRASCAN 360 DEGREE 3WIRE	<b>753R-WE</b>	12381



## PIR Flush Mount Sensors

Description	Reference	Unit MRP [₹]
ARGUS Standard min 360° False ceiling indoor movement detector	<b>CCT570005</b>	5786
ARGUS Standard 360° False ceiling indoor movement detector - 2ch	<b>CCT570003</b>	8494
Flush Mount Dual load 360 degrees standalone sensor	SAE-UE-MS-CDBWE	9864



# Dimmable Sensors with Light Regulation

## 0-10V Analogue & Dali Dimmable Sensor

Description	Reference	Unit MRP [₹]
ARGUS Presence Master with IR, DALI	<b>MTN5510-1519</b>	17472

Please contact Customer Care Center for Stockable and Non stockable status of references.  
\*Bold references are MTO reference.

## Wall Mount Sensors



### BS Standard & Outdoor IP55 Sensor

Description	Reference	Unit MRP [₹]
Neo C-Metro 200 degrees wall mount sensor, grey colour	<b>E3751MS3C_GS</b>	7881
Zencelo 110 degrees wall mount sensor, white colour	<b>E84751MS3B_WE</b>	7980
Zencelo 90 degrees wall mount sensor, white colour	<b>E84751MS3A_WE</b>	6085
Argus 110 Electronic outdoor movement detector, angle of detection 110 degrees, max. range 12 mtrs, IP55 protection	<b>MTN565119</b>	8518
Argus 220 Electronic movement detector for outdoor ceiling mounting angle of detection 220 degrees, max. range 12 mtrs, IP55 protection	<b>MTN565219</b>	13143

## Hotel - ELV Dual Motion Sensor

Description	Reference	Unit MRP [₹]
ELV DUAL TECH MOTION SENSOR	<b>SAE_UE_MS_CULV_WE</b>	10806









## Schneider Electric India Pvt. Ltd.

Corporate Office: 15th Floor, DT-4 Downtown, DLF Phase 3, Sector 25A, Gurugram, Haryana - 122002

### Ahmedabad

Schneider Electric India (P) Ltd.  
1506-1507, 15<sup>th</sup> Floor Shapth-5  
Opp.Karnavati Club, SG Highway,  
Ahmedabad, Gujarat - 380015  
Tel.: 079-66826701

### Bengaluru

Schneider Electric India (P) Ltd.  
No. 3/1, JP Techno Park  
Mezzanine Floor, Millers Tank Bund  
Road, Vasanth Nagar  
Bengaluru - 560052  
Tel.: 080-71481351

### Bhubaneswar

Schneider Electric India (P) Ltd.  
Workloop Co-Working in the property  
Office No. 316, Esplanade One Mall  
Rasulgarh, Bhubaneswar - 751010

### Chennai

Schneider Electric India (P) Ltd.  
No: 29, 2<sup>nd</sup> Floor,  
Bannari Amman Towers, B-Block  
Dr. Radhakrishnan Road, Mylapore  
Chennai - 600 004  
Tel.:044-71912000

### Cochin

Schneider Electric India (P) Ltd.  
Alapatt Properties Private Limited  
(Trade Name: Centre A)  
Main Door Number: 66/4971  
(Old Door Number: 40/6584-H)  
7<sup>th</sup> Floor Alapatt Heritage Building  
MG Road Kochi - 682035

### Coimbatore

Schneider Electric India Pvt. Ltd.  
Mikro Grafeo Services Pvt Ltd.,  
Elysium Tower, #21, A.T.T  
Colony, Near Honda Office,  
Coimbatore, Tamil Nadu - 641018

### Hyderabad

Schneider Electric Pvt. Ltd.  
4B-4th Floor, Gumidelli Towers,  
Prakash Nagar, Begumpet,  
Hyderabad - 500016

### Indore

Schneider Electric India (P) Ltd.  
219, Dhan Trident Building  
Vijay Nagar, A.B.Road  
Indore - 452001

### Jaipur

Schneider Electric India (P) Ltd.  
Jaipur Business Centre 309  
3<sup>rd</sup> Floor, Sangam Tower 190  
Church Road, Jaipur - 302001  
Tel.: 0141-2374810

### Kolkata

Schneider Electric (I) Pvt. Ltd.  
BN3, Salt Lake, Sector V,  
Kolkata - 700091

### Lucknow

Schneider Electric India (P) Ltd.  
Summit, Plot No. TCG 3/3  
6<sup>th</sup> Floor, 604A/B/C, Vibhuti Khand  
Gomti Nagar, Lucknow  
Uttar Pradesh - 226010  
Tel.: 0522-3500334

### Ludhiana

Schneider Electric India (P) Ltd.  
SCO 23, 2nd Floor,  
Chandigarh Road, Sector 32  
Ludhiana, Punjab -141010  
Tel.: 0161- 5203011

### Mohali

Schneider Electric India (P) Ltd.  
2nd Floor, Tower-A  
Bestech Business Tower  
Mega Information & Technology Park  
Industrial Plot No.1, Phase IX  
(Expansion), Mohali - 160059  
Tel.: 0172-7198200

### Mumbai

Schneider Electric India Pvt. Ltd.  
L&T Business Park, Tower B,  
7th Floor, TC-II, Gate No.5,  
Saki Vihar Road, Powai,  
Mumbai - 400072

### Nagpur

Schneider Electric India (P) Ltd.  
6, Vasant Vihar Complex  
W.H.C Road, Shankar Nagar  
Nagpur - 440010  
Tel.: 0712-2558581

### Nashik

Schneider Electric India (P) Ltd.  
401, 4<sup>th</sup> Floor, Rishi Raj Towers  
Jehan Circle, Gangapur Road  
Nashik - 422013  
Tel.: 0253-2344333

### New Delhi

Schneider Electric India (P) Ltd.  
C-56, Mayapuri Industrial Area, Phase-2  
New Delhi - 110064  
Tel.: 011-61317400

### Pune

Schneider Electric India (P) Ltd.  
Amar Caliber, CTS No 911, BMCC Road,  
OFF F.C. Road, Deccan Gymkhana,  
Shivaji Nagar, Pune - 411007  
Tel.: 020-67492500

### Vadodara

Schneider Electric India (P) Ltd.  
Notus IT Park, 10<sup>th</sup> Floor, Block-D  
Sarabhai Campus, Vadiwadi  
Vadodara, Gujarat - 390017

### Vishakhapatnam

Schneider Electric India (P) Ltd.  
D.N.10-1-43, 1<sup>st</sup> Floor  
Ratnam's Business Centre,  
Siripuram Fort, C.B.M.Compound  
Visakhapatnam - 530016  
Tel.: 0891-6675500

### Customer Care Centre

Monday-Saturday, 9 a.m. to 8 p.m.  
Toll-free numbers: 1800 419 4272, 1800 103 0011  
Email: [customercare.in@schneider-electric.com](mailto:customercare.in@schneider-electric.com)

For more information, visit our website at: [www.se.com/in](http://www.se.com/in)

- All Prices are in Indian Rupees
- Prices are subject to change without prior notice
- Product evolution is a continuous process and Schneider Electric reserves the right to modify/withdraw any product at any time without prior notice
- Prices charged will be as prevailing on the date of dispatch
- Invoice Amount = (MRP – less Applicable discount) + Applicable GST %
- Tax incidence on invoices is basis applicable GST rates
- Invoice amount not to exceed MRP
- Product pictures shown are for illustration purpose only; actual product may vary
- Kindly refer product datasheet for detailed specification

Distributor